



### Magnetic Buzzer


## EMX-300L<sub>1</sub>(L<sub>2</sub>)SERIES



EMX-300L<sub>1</sub>SERIES

EMX-300L<sub>2</sub>SERIES

#### DIMENSIONS:(Unit: mm)

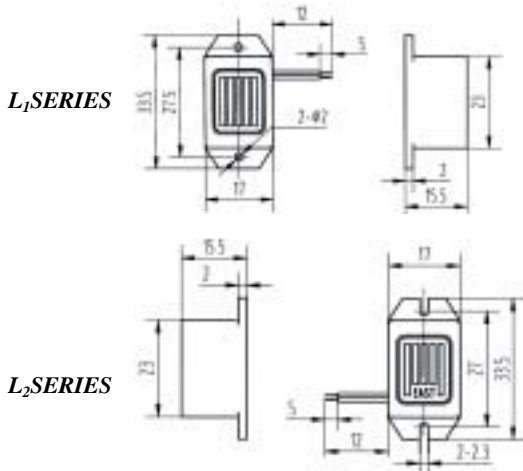

#### FEATURES:


- Low Current
- Compact
- Rich Sound

#### APPLICATIONS:

- Automatic Control Equipment
- Communication Equipment
- Electronic Instruments

#### CHARACTERISTICS:

##### EMX-312L

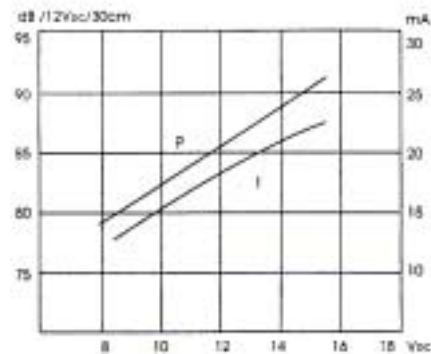

#### ELECTRICAL SPECIFICATIONS :

Model No.	EMX-301L	EMX-303L	EMX-306L	EMX-309L	EMX-312L	EMX-324L
Min. Sound Pressure Level	70			75		
	/Rated Voltage/30cm			/Rated Voltage/30cm		
Rated Voltage (DC) (V)	1.5	3	6	9	12	24
Operating Voltage (DC) (V)	1~3	2~4	4~8	6~2	9~15	15~7
Max. Consumption (mA)	20		25		28	30
Oscillating Frequency (Hz)	400 50					
Operating Temperature (°C)	-20~ +70					
Weight	( g )					8

#### PACKING INFORMATION:

Packing: 2000 pcs per export carton

Carton Size: 30.5 x 25 cm

G. Weight: 19.5 kgs N. Weight: 18 kgs

Address: No. 12. Lane 722. Sangtian Road Jiangdong Science Garden  
Ningbo, 315040. P. R. China

Fax No: (0574)87803761

Tel: (0574)87802511

