
Mains Flex - 3 Core Cable Coiled (0.20, 0.75 and 1.25mm²)



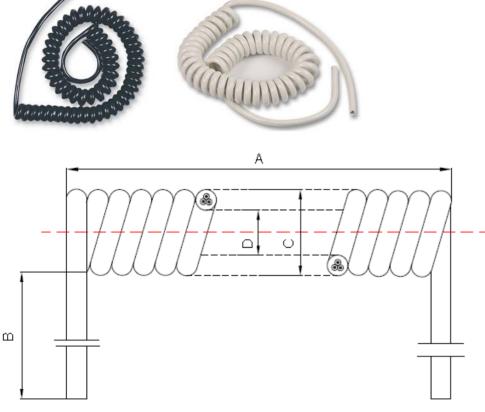

Dimensions : Millimetres

Specifications for 3 core 0.75mm² spiral cable

Cores quantity	: 3.
Core size	: 0.75mm ² .
Construction	: 24/0.2 plain copper.
Cores insulation	: PVC.
Cable	: BS 6500.
Sheath material	: PVC.
Sheath colour	: Black or white.
Sheath outer diameter	: 6.8mm.
Inside diameter	: 9.5mm.
Coil outer diameter	: 24mm.
Closed coil length	: 500mm.
Tails (tangent)	: 150mm.
Extended length	: 2500mm.
Voltage	: 300/500v.
Current	: 6A.

Specifications for 3 core 1.00mm² spiral cable

Cores quantity	: 3.
Core size	: 1.00mm ² .
Construction	: 32/0.2 plain copper.

http://www.farnell.com http://www.newark.com http://www.cpc.co.uk



Mains Flex - 3 Core Cable Coiled (0.20, 0.75 and 1.25mm²)



Specifications for 3 core 1.00mm² spiral cable

Cores insulation	: PVC.
Cable	: BS 6500.
Sheath material	: PVC.
Sheath colour	: Black or white.
Sheath outer diameter	: 7.2mm.
Inside diameter	: 9.5mm.
Coil outer diameter	: 25mm.
Closed coil length	: 500mm.
Tails (tangent)	: 150mm.
Extended length	: 2500mm.
Voltage	: 300/500v.
Current	: 10A.

Specifications Table

	Α	В	С	D	Cable Marking	Basic Cable	Outer Diameter (mm)	Length (m)
Item	Coils	Tails (mm)	Overall Diameter (mm)	Inside Diameter (mm)				
15/X/11 BLACK 1A	25 ±2 (approximately 12.19 to 143.1mm)	26.5	20.6 ±3.0		-	18/0.12mm BC x 3C (Blue, Brown, Yellow/Green) + PVC Insulated + PVC Sheath	5.3	1.5
15/X/10 BLACK 6A					-			
10A MAINS BLK					-			
15/X/9 BLACK 13A	36 ±2 (approximately 281.18 to 314.26mm)		26.5 ±3.0	- 10.0 ±2.0	SAMSON BS6500 H05VV-F 3 x 1.25	110/0.12mm BC x 3C (Blue, Brown, Yellow/Green) + PVC Insulated + PVC Sheath	8.27	2.36
15/X/11 WHITE 1A		- 150 ±10mm -	20.6 ±3.0		-	18/0.12mm BC x 3C (Blue, Brown, Yellow/Green) + PVC Insulated + PVC Sheath	5.3	1.5
15/X/10 WHITE 6A	25 ±2 (approximately 12.19 to 143.1mm)				-			
10A MAINS WHT					-			
15/X/9 WHITE 13A	36 ±2 (approximately				SAMSON BS6500	110/0.12mm BC x 3C (Blue, Brown, Yellow/Green)	8.27	2.36
10A MAINS GREY	281.18 to 314.26mm)	26.5 ±3.0			H05VV-F 3 x 1.25	+ PVC Insulated + PVC Sheath	0.21	2.30

http://www.farnell.com http://www.newark.com http://www.cpc.co.uk



Mains Flex - 3 Core Cable Coiled (0.20, 0.75 and 1.25mm²)



Nominal Dimensions

Core Colour	Size mm ²	Contact Number	Function
Blue		-	-
Brown	0.75	-	-
Green/Yellow		-	-
Blue		-	-
Brown	1.00	-	-
Green/Yellow		-	-

Part Number Table

Description	Part Number
Cable, Mains, Coiled, 0.22mm	15/X/11 BLACK 1A
Cable, Mains, Coiled, 0.75mm	15/X/10 BLACK 6A
Cable, Mains, Coiled, 1mm	10A MAINS BLK
Cable, Mains, Coiled, 1.25mm	15/X/9 Black 13A
Cable, Mains, Coiled, 0.22mm	15/X/11 White 1A
Cable, Mains, Coiled, 0.75mm	15/X/10 White 6A
Cable, Mains, Coiled, 1mm	10A Mains WHT
Cable, Mains, Coiled, 1.25mm	15/X/9 White 13A
Cable, Mains, Coiled, 1mm	10A Mains Grey

Disclaimer This data sheet and its contents (the "Information") belong to the Premier Famell Group (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheets previously for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. SPC pro-Power is the registered trademark of the Group. © Premier Farnell plc 2010.

http://www.farnell.com http://www.newark.com http://www.cpc.co.uk

