

DRA18 SERIES



AC - DC DIN RAIL MOUNTABLE
18W CLASS 2 POWER SUPPLY
INDUSTRIAL CONTROL EQUIPMENT

FEATURES

- UL / cUL / TUV / CE
- UNIVERSAL INPUT 90~265VAC
- HIGH EFFICIENCY UP TO 77%
- SHORT CIRCUIT PROTECTION
- INTERNAL INPUT FILTER
- 2 YEARS WARRANTY

MODEL LIST

| MODEL NO. | INPUT VOLTAGE | OUTPUT WATTAGE | OUTPUT VOLTAGE | OUTPUT CURRENT | EFF. (min.) | EFF. (typ.) |
|-----------------------------|---------------|----------------|----------------|----------------|-------------|-------------|
| Single Output Models | | | | | | |
| DRA18-05(A) | 90~265 VAC | 15 WATTS | + 5 VDC | 3000 mA | 73% | 75% |
| DRA18-12(A) | 90~265 VAC | 18 WATTS | + 12 VDC | 1500 mA | 75% | 77% |
| DRA18-15(A) | 90~265 VAC | 18 WATTS | + 15 VDC | 1200 mA | 75% | 77% |
| DRA18-24(A) | 90~265 VAC | 18 WATTS | + 24 VDC | 750 mA | 75% | 77% |

SPECIFICATION

All Specifications Typical At Nominal Line, Full Load, 25°C Unless Otherwise Noticed

| GENERAL | | | | | | |
|----------------------|------------------------------------|-------------|-------|---------|------|--------|
| Characteristics | Conditions | | min. | typ. | max. | unit |
| Switching frequency | Vi nom, Io nom | | 100 | | | KHz |
| Isolation voltage | Input / Output | | 3,000 | | | VAC |
| Isolation resistance | Input / Output, @ 500VDC | | 100 | | | MΩ |
| Ambient temperature | Operating at Vi nom, Io 70%...100% | | -10 | | + 50 | °C |
| Case temperature | Operating at Vi nom, Io nom | | | | + 85 | |
| Derating | Vi nom, Io nom +51 to +71°C | | | | 2 | % / °C |
| Storage temperature | Non operational | | -25 | | + 85 | °C |
| M.T.B.F | According to MIL-HDBK-217F, GF40 | | | 195,000 | | Hrs |
| Relative humidity | Vi nom, Io nom | | 20 | | 95 | % RH |
| Dimension | L90 x W22.5 x D115 | | | | | mm |
| Cooling | Free air convection | | | | | |
| Case material | Plastic | | | | | |
| INPUT SPECIFICATIONS | | | | | | |
| Characteristics | Conditions | | min. | typ. | max. | unit |
| Rated input voltage | Io nom | | 100 | | 240 | VAC |
| Input voltage range | Ta min ... Ta max, Io nom | AC in | 90 | | 265 | VAC |
| | | DC in | 120 | | 370 | VDC |
| Line frequency | Vi nom, Io nom | | 47 | | 63 | Hz |
| Inrush current | Io nom | Vi : 115VAC | | | 10 | A |
| | | Vi : 230VAC | | | 18 | A |



SPECIFICATION

All Specifications Typical At Nominal Line, Full Load, 25°C Unless Otherwise Noticed

OUTPUT SPECIFICATIONS

| Characteristics | Conditions | min. | typ. | max. | unit | |
|-------------------------------------------|-------------------------------------|---------------------------|-------|------------|---------|-----|
| Output voltage accuracy | V_i nom, I_o min ... I_o nom | | | ± 1 | % | |
| Minimum load | V_i nom | 0 | | | % | |
| Line regulation | I_o nom, V_i min ... V_i max | | | ± 1 | % | |
| Load regulation | V_i nom, I_o min ... I_o nom | | | ± 2 | % | |
| Transient recovery time | 50% load step changed | | 300 | | μ S | |
| Temperature coefficient | V_i nom, I_o min | | | ± 0.02 | % / °C | |
| Ripple & noise | V_i nom, I_o nom, BW = 20MHz | | | 50 | mV | |
| Hold up time | I_o nom | $V_i = 115VAC$ | 20 | | ms | |
| | | $V_i = 230VAC$ | 75 | | ms | |
| Voltage trim range | V_i nom, I_o nom | 5V ...15V models | - 10 | | + 15 | % |
| | | 24V model | - 10 | | + 20 | % |
| DC ON indicator threshold at start up | V_i nom, I_o nom | 5V model | 4.5 | | | VDC |
| | | 12V model | 10.8 | | | VDC |
| | | 15V model | 13.5 | | | VDC |
| | | 24V model | 21.6 | | | VDC |
| DC LOW indicator threshold after start up | V_i nom, I_o nom | 5V model | 3.75 | | 4.5 | VDC |
| | | 12V model | 9 | | 10.8 | VDC |
| | | 15V model | 11.25 | | 13.5 | VDC |
| | | 24V model | 18 | | 21.6 | VDC |
| Efficiency | V_i nom, I_o nom, P_o / P_i | Up to 77%, See model list | | | | |


CONTROL AND PROTECTION

| Characteristics | Conditions | min. | typ. | max. | unit |
|----------------------------|----------------------|-----------------------|------|------|------|
| Input fuse | | T2A / 250VAC internal | | | |
| Rated over load protection | V_i nom | 110 | | 135 | % |
| Over voltage protection | V_i nom, I_o nom | 125 | | 145 | % |
| Output short circuit | V_i nom, I_o nom | Hiccup mode | | | |

APPROVALS AND STANDARDS


| | |
|----------|---------------------------------------------|
| UL / cUL | UL508 / UL1310 Listed, Class 2 Power Supply |
| TUV | EN60950 |
| CE | EN50081-1 / EN55022 for EMI |
| | EN50082-1 / EN55024 for EMS |
| FCC | Class B |

CIRCUIT SCHEMATIC

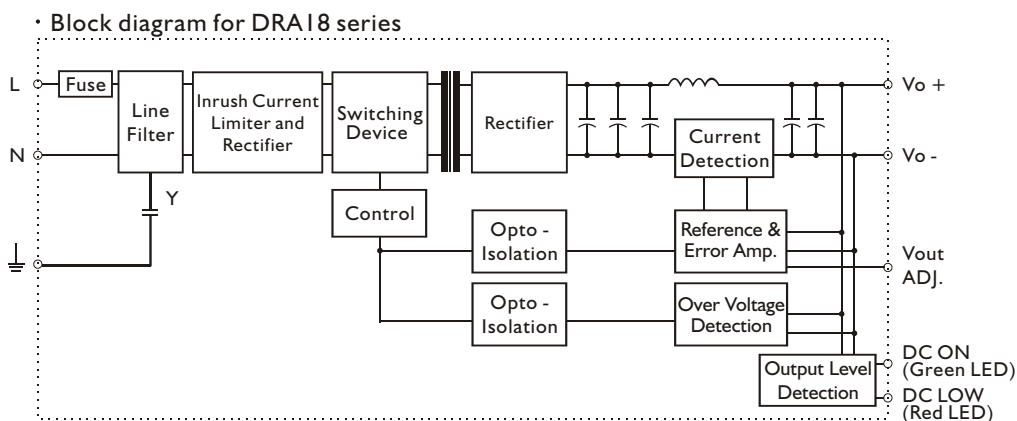

MECHANISM & PIN CONFIGURATION

mm [inch]

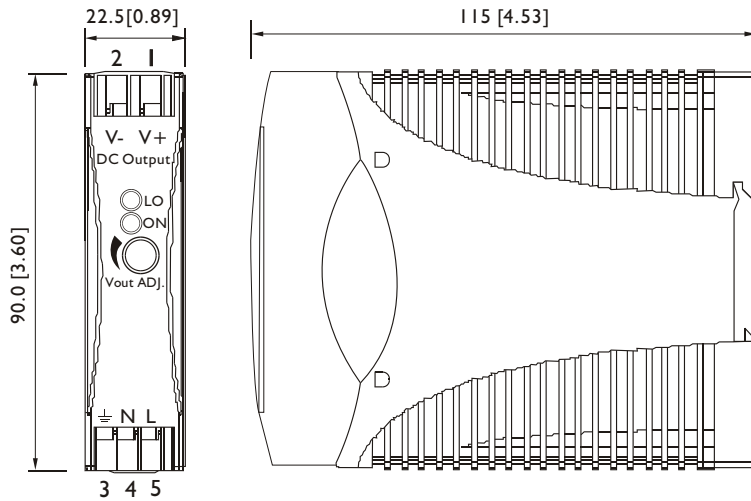

CONSTRUCTION

Easy snap-on mounting onto the DIN-Rail (TS35/7.5 or TS35/15), unit sits safely and firmly on the rail; no tools required even to remove

INSTALLATION

Ventilation / Cooling
 Normal convection
 All sides 25mm free space
 For cooling recommended
 Connector size range
 Solid: 0.2-2.0mm² (AWG24-14)
 (use copper conductors only)

PHYSICAL CHARACTERISTICS

| | |
|---------------|---------------------------------------------|
| CASE SIZE | 90 x 22.5 x 115 mm 3.6 x 0.89 x 4.53 inches |
| CASE MATERIAL | Plastic |
| WEIGHT | 150 g |

PIN ASSIGNMENT

| PIN NO. | Designation | Description |
|---------|-------------|--------------------------------------------------------------|
| 1 | V + | Positive output terminal |
| 2 | V - | Negative output terminal |
| 3 | ⊥ | Ground this terminal to minimize high-frequency emissions |
| 4 | N | Input terminals (neutral conductor, no polarity at DC input) |
| 5 | L | Input terminals (phase conductor, no polarity at DC input) |
| | ON | Operation indicator LED |
| | LO | DC LOW indicator LED |
| | Vout ADJ. | Trimmer-potentiometer for Vout adjustment |

DERATING

