


multicomp	PART NO.		REVISIONS							
	5504F1 - Series	ECN #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
		-	Α	RELEASED	Shalini	28/05/09	Suresh	28/05/09	Farnell	11/06/09

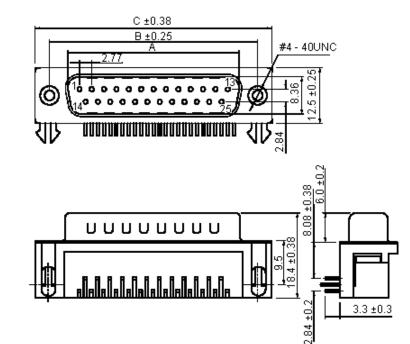



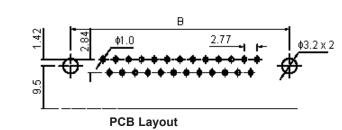

#### **Dimensions : Millimetres**

This data sheet and its contents (the "Information") belong to the Premier Farnell Group (the "Group") or are licensed to it. No licence is granted for the use of it other than for	TOLERANCES:	DRAWN BY:	DATE:	DRAWING TITLE:			
information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change with-	UNLESS OTHERWISE	Shalini	28/05/09	] [	D-Sub Plug - PCB	, Right Angle	
out notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this	SPECIFIED,	CHECKED BY:	DATE:	SIZE DWG NO.		ELECTRONIC FILE	REV
data sheet should check for themselves the Information and the suitability of the prod-	DIMENSIONS ARE	Suresh	28/05/09	Δ	M10002236	1084705-TDS DWG	A
use of it (including liability resulting from negligence or where the Group was aware of	FOR REFERENCE PURPOSES ONLY.	APPROVED BY:	DATE:		I		L
the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. SPC MULTICOMP is the registered trademark of the Group. © Premier Farnell pic 2009.		Farnell	11/06/09	SCALE: NTS	U.O.M.: mm	SHEET: 1 OF	F 2

## **Specifications:**

Current rating Voltage rating Temperature range Maximum contact resistance Minimum insulation resistance Withstanding voltage Materials Insulator Contact Shell

- : 3.0A ac, dc.
- : 250V ac, dc.
- : -40°C to +85°C.

- : 30mΩ.
- : 5000MΩ.
- : 1000V ac/minute.
- : High temperature plastic.
- : Copper alloy nickel undercoated, selective gold plated.

RoHS.

Compliant

: Metal iron with tin plated.

# **Specification Table**

Positions	Α	В	С
9	16.92	24.99	30.81
15	25.25	33.32	39.14
25	38.96	47.04	53.04
37	55.42	63.50	69.32


**Dimensions : Millimetres** 

multicomp	PART NO.		REVISIONS							
	1 6	ECN #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
		-	А	RELEASED	Shalini	28/05/09	Suresh	28/05/09	Farnell	11/06/09

## Part Number Table

Description	Part Number
Plug, D, PCB, Right Angle, 9 Way	5504F1-09P-01-03-F1
Plug, D, PCB, Right Angle, 15 Way	5504F1-15P-01-03-F1
Plug, D, PCB, Right Angle, 25 Way	5504F1-25P-01-03-F1
Plug, D, PCB, Right Angle, 37 Way	5504F1-37P-01-03-F1

### Part Number Explanation:

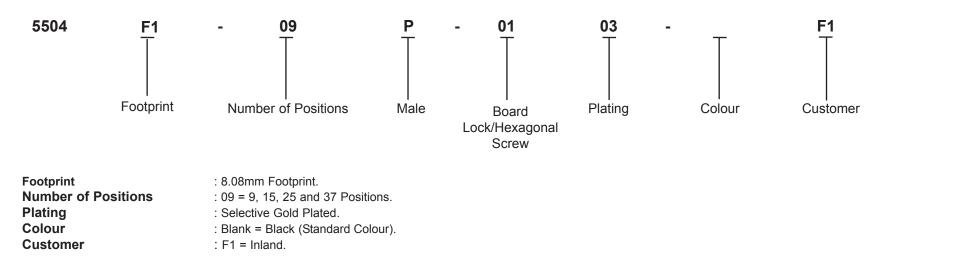

http://www.farnell.com

http://www.newark.com

http://www.cpc.co.uk

(the Group ) or are incensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change with- out notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the prod- ucts for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or	TOLERANCES: UNLESS OTHERWISE	DRAWN BY: Shalini	DATE: 28/05/09	DRAWING TITLE:	D-Sub Plug - PCB,	Right Angle	
	SPECIFIED, DIMENSIONS ARE FOR REFERENCE	CHECKED BY: Suresh	DATE: 28/05/09	SIZE DWG NO.		ELECTRONIC FILE 1084705-TDS_DWG	REV A
	PURPOSES ONLY.	APPROVED BY: Farnell	DATE: 11/06/09	SCALE: NTS	U.O.M.: mm	SHEET: 2 OF	F 2