




ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

SPC-F008.DWG

REVISIONS

DOC. NO. SPC-F008 * Effective: 7/8/02 * DCP No: 1398

DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
1968	A	Released	JN	03/12/08	JN	03/12/08	JN	03/12/08

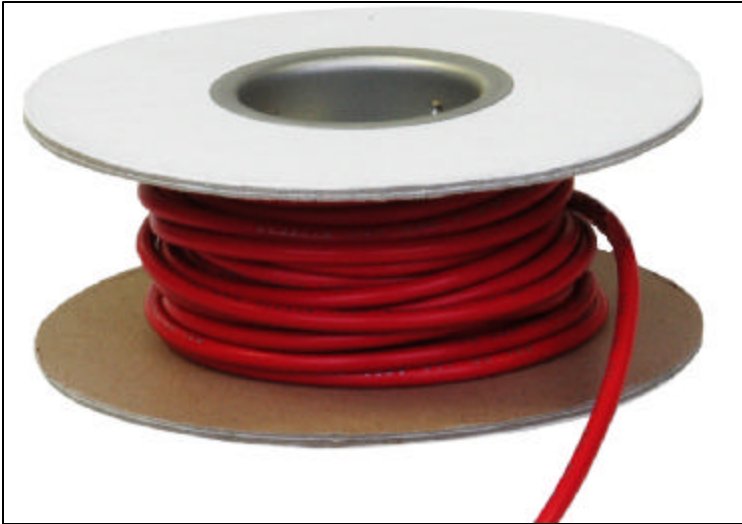

Gauge	Stranding	Color	Nom. Dia. of Stranded Conductor		Nom. Fin. Wire Diam.		Max. Resistance (dc at 20B C) Ohm/per		100' Spool	500' Spool	1000' Spool
			Inch	mm	Inch	mm	1000-ft	Km			
28	7x36	White	0.0154	0.39	0.047	1.19	72.8	239	PP1001	PP1036	PP1071
28	7x36	Green	0.0154	0.39	0.047	1.19	72.8	239	PP1002	PP1037	PP1072
28	7x36	Black	0.0154	0.39	0.047	1.19	72.8	239	PP1003	PP1038	PP1073
28	7x36	Red	0.0154	0.39	0.047	1.19	72.8	239	PP1004	PP1039	PP1074
28	7x36	Blue	0.0154	0.39	0.047	1.19	72.8	239	PP1005	PP1040A	PP1075
26	7x34	White	0.0197	0.5	0.051	1.3	45.8	150	PP1006	PP1041A	PP1076
26	7x34	Green	0.0197	0.5	0.051	1.3	45.8	150	PP1007	PP1042A	PP1077
26	7x34	Black	0.0197	0.5	0.051	1.3	45.8	150	PP1008	PP1043A	PP1078
26	7x34	Red	0.0197	0.5	0.051	1.3	45.8	150	PP1009	PP1044A	PP1079
26	7x34	Blue	0.0197	0.5	0.051	1.3	45.8	150	PP1010	PP1045A	PP1080
24	7x32	White	0.024	0.61	0.056	1.41	28.7	94.2	PP1011A	PP1046	PP1081
24	7x32	Green	0.024	0.61	0.056	1.41	28.7	94.2	PP1012A	PP1047	PP1082
24	7x32	Black	0.024	0.61	0.056	1.41	28.7	94.2	PP1013A	PP1048	PP1083
24	7x32	Red	0.024	0.61	0.056	1.41	28.7	94.2	PP1014A	PP1049	PP1084
24	7x32	Blue	0.024	0.61	0.056	1.41	28.7	94.2	PP1015	PP1050	PP1085
22	7x30	White	0.0299	0.76	0.061	1.56	18.1	59.4	PP1016	PP1051	PP1086
22	7x30	Green	0.0299	0.76	0.061	1.56	18.1	59.4	PP1017	PP1052	PP1087
22	7x30	Black	0.0299	0.76	0.061	1.56	18.1	59.4	PP1018	PP1053	PP1088
22	7x30	Red	0.0299	0.76	0.061	1.56	18.1	59.4	PP1019	PP1054	PP1089
22	7x30	Blue	0.0299	0.76	0.061	1.56	18.1	59.4	PP1020	PP1055	PP1090
20	10x30	White	0.0374	0.95	0.069	1.75	11.2	36.7	PP1021	PP1056	PP1091
20	10x30	Green	0.0374	0.95	0.069	1.75	11.2	36.7	PP1022	PP1057	PP1092
20	10x30	Black	0.0374	0.95	0.069	1.75	11.2	36.7	PP1023	PP1058	PP1093
20	10x30	Red	0.0374	0.95	0.069	1.75	11.2	36.7	PP1024	PP1059	PP1094
20	10x30	Blue	0.0374	0.95	0.069	1.75	11.2	36.7	PP1025	PP1060	PP1095
18	16x30	White	0.0465	1.18	0.078	1.98	6.77	22.2	PP1026	PP1061	PP1096
18	16x30	Green	0.0465	1.18	0.078	1.98	6.77	22.2	PP1027	PP1062	PP1097
18	16x30	Black	0.0465	1.18	0.078	1.98	6.77	22.2	PP1028	PP1063	PP1098
18	16x30	Red	0.0465	1.18	0.078	1.98	6.77	22.2	PP1029	PP1064	PP1099
18	16x30	Blue	0.0465	1.18	0.078	1.98	6.77	22.2	PP1030	PP1065	PP1100
16	26x30	White	0.0591	1.5	0.091	2.3	4.45	14.6	PP1031	PP1066	PP1101
16	26x30	Green	0.0591	1.5	0.091	2.3	4.45	14.6	PP1032	PP1067	PP1102
16	26x30	Black	0.0591	1.5	0.091	2.3	4.45	14.6	PP1033	PP1068	PP1103
16	26x30	Red	0.0591	1.5	0.091	2.3	4.45	14.6	PP1034	PP1069	PP1104
16	26x30	Blue	0.0591	1.5	0.091	2.3	4.45	14.6	PP1035	PP1070	PP1105

Note

- Conductor Material: Bare Copper
- Operating temperature: -10° to 105°C
- Rated Voltage 300V (Spark voltage 3000V)
- Flame resistance VW-1 and FT 1
- RoHS Compliant

DISCLAIMER:
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

TOLERANCES:
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWN BY:	DATE:
Jason Nash	03/12/08
CHECKED BY:	DATE:
Jason Nash	03/12/08
APPROVED BY:	DATE:
Jason Nash	03/12/08

DRAWING TITLE: UL 1007/1569 Hook-up Wire/ CSA TR-64			
SIZE	DWG. NO.	ELECTRONIC FILE	REV
	TA-845	TA-845.DWG	
SCALE: NTS	U.O.M.: INCHES [mm]	SHEET: 1 OF 1	