MICRO SWITCH
a Honeywell Division
FED. MFG. CODE 91929

SWITCH-ENCLOSED

CATALOG LISTING

BFL1-AW1

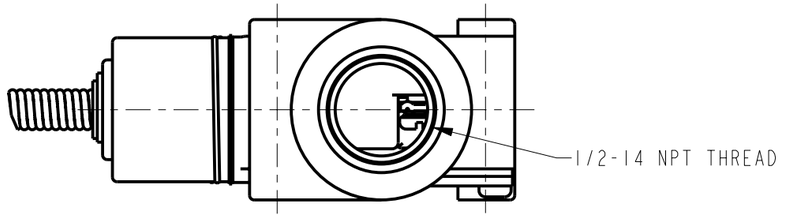

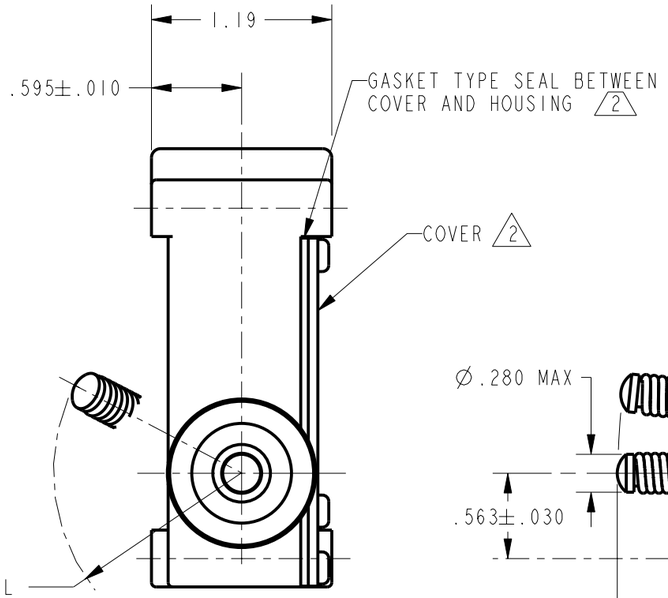

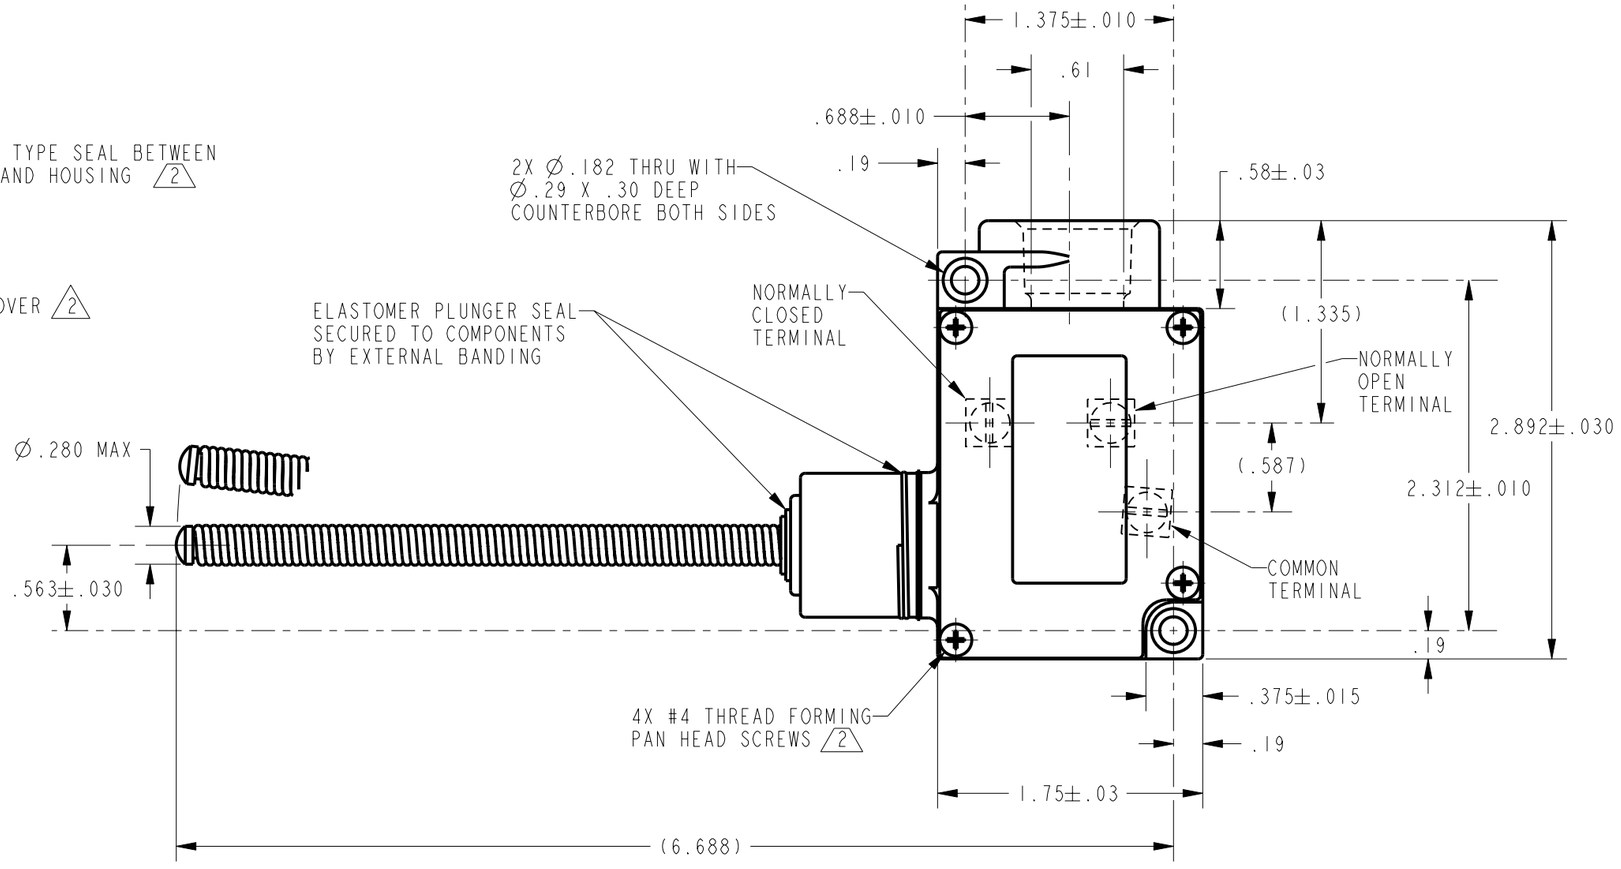

CHARACTERISTICS	ELECTRICAL DATA
OPERATING POSITION: ..... 15° MAX	CONTACT ARRANGEMENT S P D T
OPERATING FORCE: ..... 7 OZ MAX	L162 5A 125, 250, 277 VAC 1/10 HP 250 VAC

THIRD ANGLE PROJECTION

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT

NOTES
1 - 3X 6-32 UNC PRESSURE PLATE TERMINAL SCREWS
2 FURNISHED UNASSEMBLED

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

REVISIONS

ISSUE	CATALOG LISTING	PAGE	RELEASE NO.	REPLACES
1	M	1 OF 1	203802	

DRAWN	CHECK	CHECK	CHECK	CHECK
TRF 05SEP01	SAV 05SEP01			

PTC/CAD 3D