
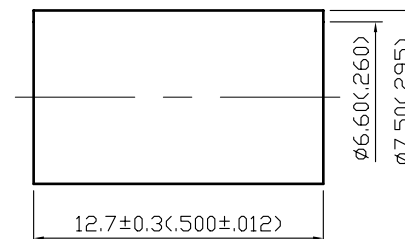


NO	DESCRIPTION	DATE
①	CHANGE THE DIRECTION OF BAYONET	03.03.97'
②	31.7±0.4 → 31.5±0.3	03.14.02'
③	BACKGROUND FORMAT UPDATED	02.23.04'
④	BACKGROUND FORMAT UPDATED 17.0 → 16.5	04.30.09'

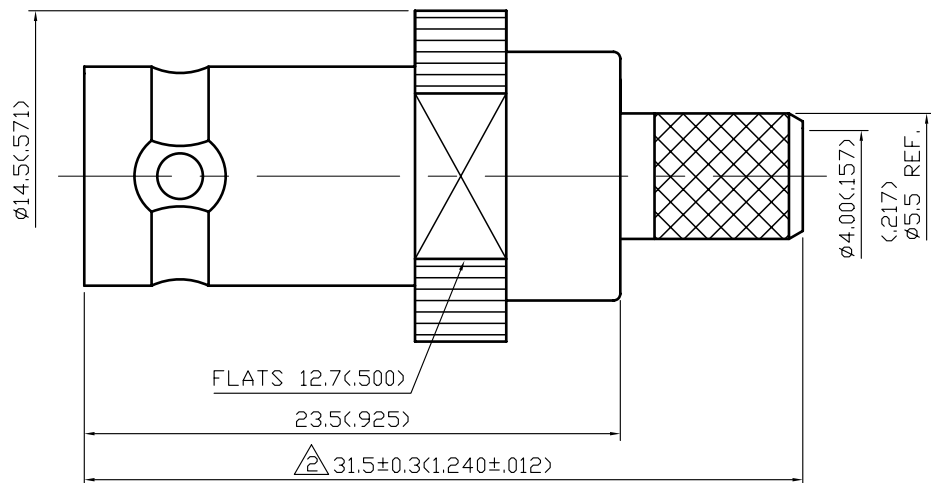

1.0 ELECTRICAL

- 1.1 FREQUENCY RANGE: DC-1 GHz
- 1.2 NOMINAL IMPEDANCE: 75 OHM
- 1.3 WORKING VOLTAGE: 500 VOLTS MAX.
- 1.4 PROOF VOLTAGE: 1500 VOLTS

2.0 MATERIALS

- 2.1 BODIES: BRASS PER JIS-C3604
- 2.2 CENTER CONTACT: BERYLLIUM COPPER PER ASTM B196 UNS C17300
- 2.3 INSULATION: TEFLON PER ASTM D1457 AND ASTM D1710
- 2.4 CRIMP FERRULE: BRASS PER JIS-C2700

3.0 FINISHES AND OTHERS


- 3.1 SEE BELOW TABLE FOR DETAILS.

4.0 MECHANICAL

- 4.1 FOR USE WITH RG59U OR SIMILAR STYLE CABLE
- 4.2 CABLE ATTACHMENT: OUTER: CRIMP, INNER: SOLDER/CRIMP
- 4.3 CRIMP SIZE REQUIRED: CONTACT: 1.8(0.071) HEX. CRIMP TOOL
FERRULE: 6.5(0.256) HEX. CRIMP TOOL

5.0 ENVIRONMENTAL

- 5.1 OPERATING TEMPERATURE RANGE: -65° C TO +165° C

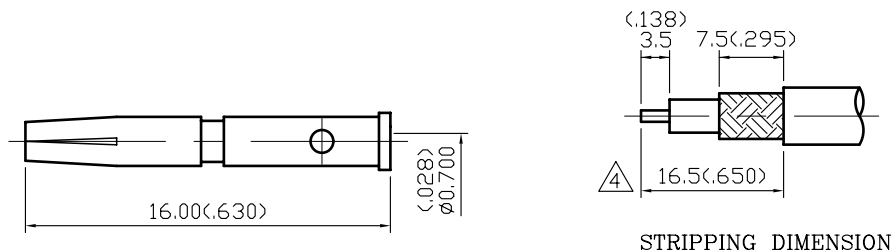

FARNELL ORDER CODE: 1169591

NO	DESCRIPTION	MATERIAL	Q'TY	FINISH
5	CHASSIS	BRASS	1	SILVER 70 μ" MIN.
4	BODY	BRASS	1	SILVER 70 μ" MIN.
3	INSULATION	TEFLON	1	NONE
2	CENTER CONTACT	BERYLLIUM COPPER	1	SILVER 70 μ" MIN.
1	CRIMP FERRULE	BRASS	1	SILVER 70 μ" MIN.

DESCRIPTION		BNC STRAIGHT JACK CRIMP							
製圖	DRAWN	TOLERANCE	品名	13-15-1	T.S.S	59U	DATE	版次	REV.
	Yoko			X	±0.2	\ROHS COMPLIANT (75Ω)	日期	07.03.96'	A-4
檢圖	CHECK	單位	UNIT	DWG.NO.	13-0365				
	Arc				.XX	±0.1	mm(in)		
認定	APPROVAL	ANGLE	SCALE	佳楠精密電子股份有限公司 CHIN NAN PRECISION ELECTRONICS CO.,LTD.					
	Lewis								