
Pro-SIGNAL	PART NO.		REVISIONS							
	GC013 (PSG90050)	ECN #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
		-	А	RELEASED	Veena	22/02/10	Jagan	22/02/10	Farnell	08/03/10

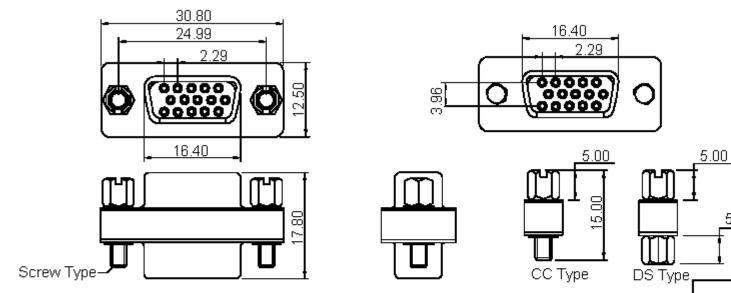

Mini Tie PSG90050 Packing: (6)

5.00

Dimensions : Millimetres

This data sheet and its contents (the "Information") belong to the Premier Farnell Group (the "Group") or are licensed to it. No licence is granted for the use of it other than for	TOLERANCES:	DRAWN BY:	DATE:	DRAWING TITLE:			
information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change with-	UNLESS OTHERWISE	Veena	22/0210	]	ender Changer - F-F,	, HD 15 Way	
believed to be accurate but the Group sasumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the prod- ucts for their purpose and not make any assumptions based on information included or	SPECIFIED, DIMENSIONS ARE FOR REFERENCE	CHECKED BY:	DATE:	SIZE DWG NO.	E	LECTRONIC FILE	REV
		Jagan	22/0210	Δ	17	75247-DWG	A
omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit	PURPOSES ONLY.	APPROVED BY:	DATE:		1		·
or restrict the Group's liability for death or personal injury resulting from its negligence. SPC pro-SIGNAL is the registered trademark of the Group. © Premier Farnell plc 2010.		Farnell	08/03/10	SCALE: NTS	U.O.M.: mm	SHEET: 1 O	F 2

Pro-SIGNAL	PART NO.		REVISIONS								
		ECN #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE	
		-	А	RELEASED	Veena	22/02/10	Jagan	22/02/10	Farnell	08/03/10	

## Specifications:

•	
Current rating	: 1.5A.
Minimum insulation resistance	: 100MΩ.
Dielectric withstanding	: 500V for one minute.
Maximum contact resistance	: 50MΩ.
Operating temperature	: -20°C to +70°C.
Materials:	
Housing	: PBT.
Contact	: Copper alloy.
Shell	: Steel.

## Part Number Table

Description	Part Number						
Gender Changer, F-F, HD15Way	GC015 (PSG90050)						

http://www.farnell.com

http://www.newark.com

http://www.cpc.co.uk

This data sheet and its contents (the "Information") belong to the Premier Farnell Group (the "Group") or are licensed to it. No licence is granted for the use of it other than for	TOLERANCES:	DRAWN BY:	DATE:	DRAWING TITLE:			
believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the prod- ucts for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or FO	UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.	Veena	22/0210	] (	Gender Changer - F-F,	HD 15 Way	
		CHECKED BY:	DATE:	SIZE DWG NO.	EL	ECTRONIC FILE	REV
		Jagan	22/0210	Δ	177	75247-DWG	A
		APPROVED BY:	DATE:		I		
or restrict the Group's liability for death or personal injury resulting from its negligence. SPC pro-SIGNAL is the registered trademark of the Group. © Premier Farnell plc 2010.		Farnell	08/03/10	SCALE: NTS	U.O.M.: mm	SHEET: 2 O	F 2