



343-1927

1/1

Interface Module

Interface module for ribbon cable acc. to IEC 603-1 / DIN 41651

Data sheet

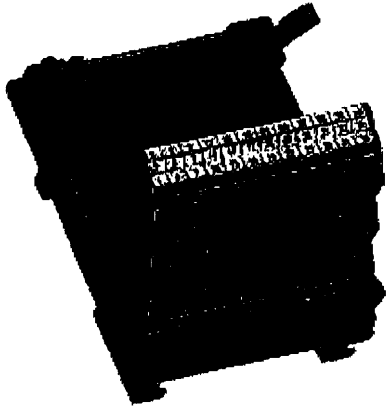

Description	No. of poles	Dimensions "L"	Item-No.	Pack.-unit pcs
Interface module	20	47 mm / 1.85 in	289-614	1
With male connector	25	55 mm / 2.17 in	289-615	1
	34	65 mm / 2.56 in	289-616	1
	40	74 mm / 2.91 in	289-617	1
	50	88 mm / 3.46 in	289-618	1
	64	114 mm / 4.49 in	289-619	1

Interface module with male connector for female connector with IDC acc. to DIN 41651 part 1 and 2. Short and long latches for the female connector with and without strain relief, are shipped loose.

- Mounting carrier for DIN 35 rail with lateral marking system.
- Marking with the WMB multi marking system or with marking strips with cover.

Technical Data	
Operating voltage	AC/DC 125 V
Nominal current	1 A
Connector contact	Phosphor-bronze 0.38 µm Au selectively over 1.3 µm Ni
Performance level	3
Nominal voltage acc. to VDE 0110/1.89	125 V / 1.5 kV / 2
Dimensions incl. mounting carrier (LxWxH)	(Lx85x62) mm (Lx3.25x2.44) in * from upper edge of DIN 35 rail
Wire connection	CAGE CLAMP® terminal strips (WAGO series 737) 0.08-2.5 mm² / AWG 28-12** ** AWG12: THHN, THWN
Stripped length	5.6 mm / 0.22 in
Mating direction	vertical
Ambient operating temperature	-20 °C...+56 °C
Storage temperature	-40 °C...+70 °C
Standards / prescriptions	IEC 603-1 / DIN 41651 Part 1 and 2