


- 注記
NOTES
1. 各部の反りは0.5最大。
WARPING : 0.5 MAX.
 2. サークットNO.はNO."I"のみ表示。
CIRCUIT NO.: I ONLY.
 3. ELV及びRoHS適合品。
ELV AND RoHS COMPLIANT.

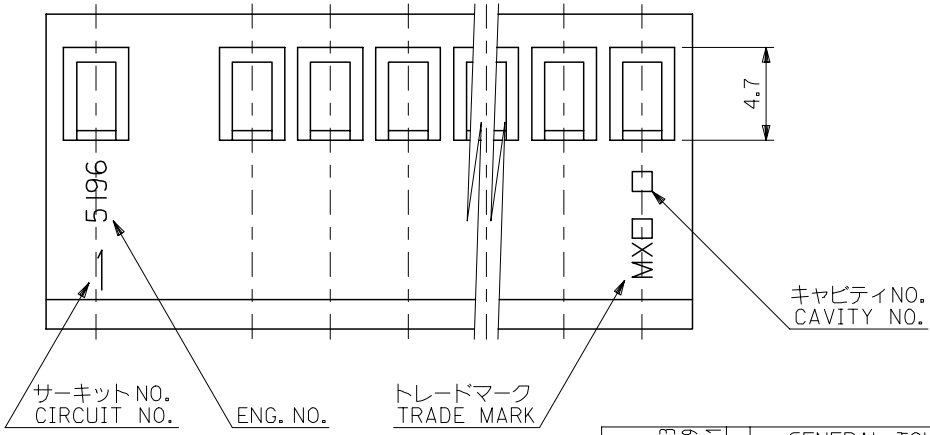

52.62	47.52	09-50-1123	5196-12	12
48.66	43.56	▲ -1113	▲ -11	11
44.7	39.6	-1103	-10	10
40.74	35.64	-1093	-09	9
36.78	31.68	-1083	-08	8
32.82	27.72	-1073	-07	7
28.86	23.76	-1063	-06	6
24.9	19.8	-1053	-05	5
20.94	15.84	-1043	-04	4
16.98	11.88	▼ -1033	▼ -03	3
13.02	7.92	09-50-1023	5196-02	2
B	A	EDP. NO.	ENG. NO.	種数 NO. OF CKTS.

REVISED EC NO: J2007-2108 DRWN: A0YAGI 2007/04/03 CHKD: KTOYODA 2007/04/09 APPR: NUKITA 2007/04/11	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 4:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION
	10 UNDER	± 0.3	DRAWN BY M. FUJIKURA	DATE 1992/09/07	TITLE SPOX 7.92/3.96 REC HSG		
	10 OVER 30 UNDER	± 0.25	CHECKED BY H. HIRAMOTO	DATE 1992/09/08	MOLEX INCORPORATED		
	30 OVER	± 0.2	APPROVED BY M. FUKUSHIMA	DATE 1992/09/08	DOCUMENT NO. SD-5196-001	SHEET NO. 1 OF 1	
	ANGULAR ± 3 °	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE			
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							

材料 MATERIAL
ナイロン66, UL94V-2
色: オフホワイト
NYLON66, UL94V-2
COLOR: OFFWHITE