






Max. Temperature : 260° during 10 seconds

Part number	PL	Thread	Index designation	Mod.	Dot.	Name	Dot.	Name	D-SUB SMT Standard Male 9p with die casted grounds and nuts		Maßstab/ Scale
09551663812.741	1	4-40 UNC	Black Insulator Reel Packaging (120 connectors) see page 2				Detail.	30Jun2006	ED	All Dim. in mm Orig. Size DIN A 4	1,5:1
09551666812.741	2						Insp.				
09551667812.741	3						Stand.				
09551663811.741	1	M3			33929	25Jan2007	ED	HARTING EURL F-95972 Paris		TB 09 55 166 x81x	Blatt/ Page 1 / 2
09551666811.741	2				33787	17Jul2006	ED	HARTING			
09551667811.741	3				33773	30Jun2006	ED				
Part number	PL	Thread	Index designation	Mod.	Dot.	Name	Sub.				

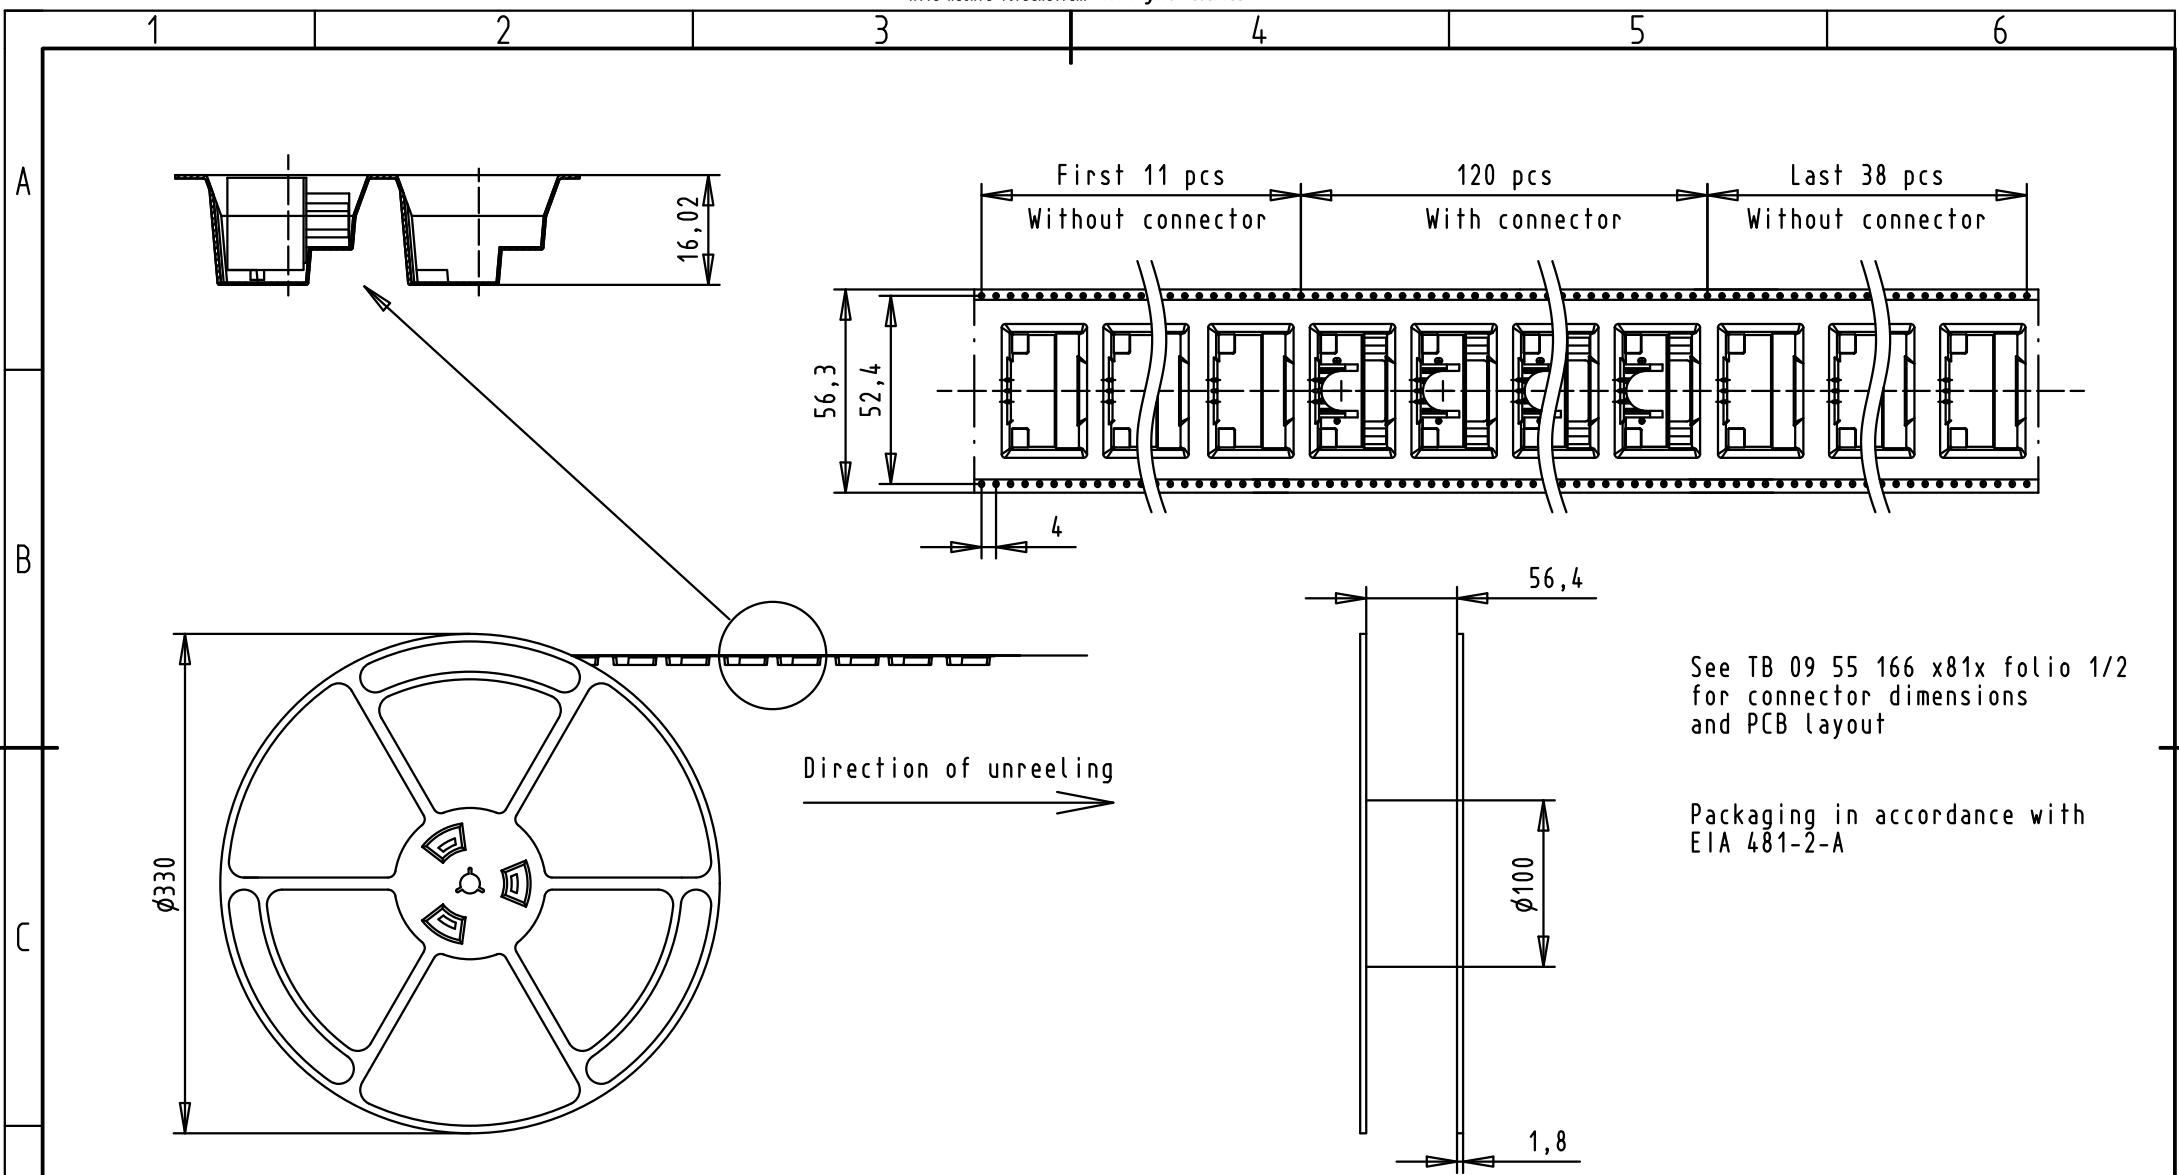

See TB 09 55 166 x81x folio 1/2  
for connector dimensions  
and PCB layout

Packaging in accordance with  
EIA 481-2-A

Part number	PL	Thread	Index designation	Mod.	Dot.	Name	Mod.	Dot.	Name	D-SUB SMT Standard Male 9p with die casted grounds and nuts		Maßstab/ Scale								
09551663812.741	1	4-40 UNC	Black Insulator	33975	02Apr2007	ED	Detail.	17Jul2006	ED	 All Dim. in mm Orig. Size DIN A 4		TB 09 55 166 x81x Sub.								
09551666812.741	2												Reel Packaging (120 connectors)	33929	25Jan2007	ED	Insp.			Blatt/ Page 2 / 2
09551667812.741	3																			
09551663811.741	1	M3	Black Insulator	33975	02Apr2007	ED	Detail.	17Jul2006	ED	 All Dim. in mm Orig. Size DIN A 4		TB 09 55 166 x81x Sub.								
09551666811.741	2												Reel Packaging (120 connectors)	33929	25Jan2007	ED	Insp.			Blatt/ Page 2 / 2
09551667811.741	3																			