

TECH SPEC

PRE-MADE VIDEO CABLES

110-178 to 110-180
110-181 to 110-185
110-024 to 110-027




PORT CABLE TECHNOLOGY

Date: 31/03/2003
Page: 1 of 2

All dimensions are in millimeters (mm) unless otherwise noted.
Dimensions are TYPICAL and are for general reference purposes only.

PART NUMBERS:

- 110-178 0.5M 4 POLE SVHS CABLE
- 110-024 1M 4 POLE SVHS CABLE
- 110-025 3M 4 POLE SVHS CABLE
- 110-026 5M 4 POLE SVHS CABLE
- 110-027 10M 4 POLE SVHS CABLE
- 110-179 15M 4 POLE SVHS CABLE
- 110-180 20M 4 POLE SVHS CABLE

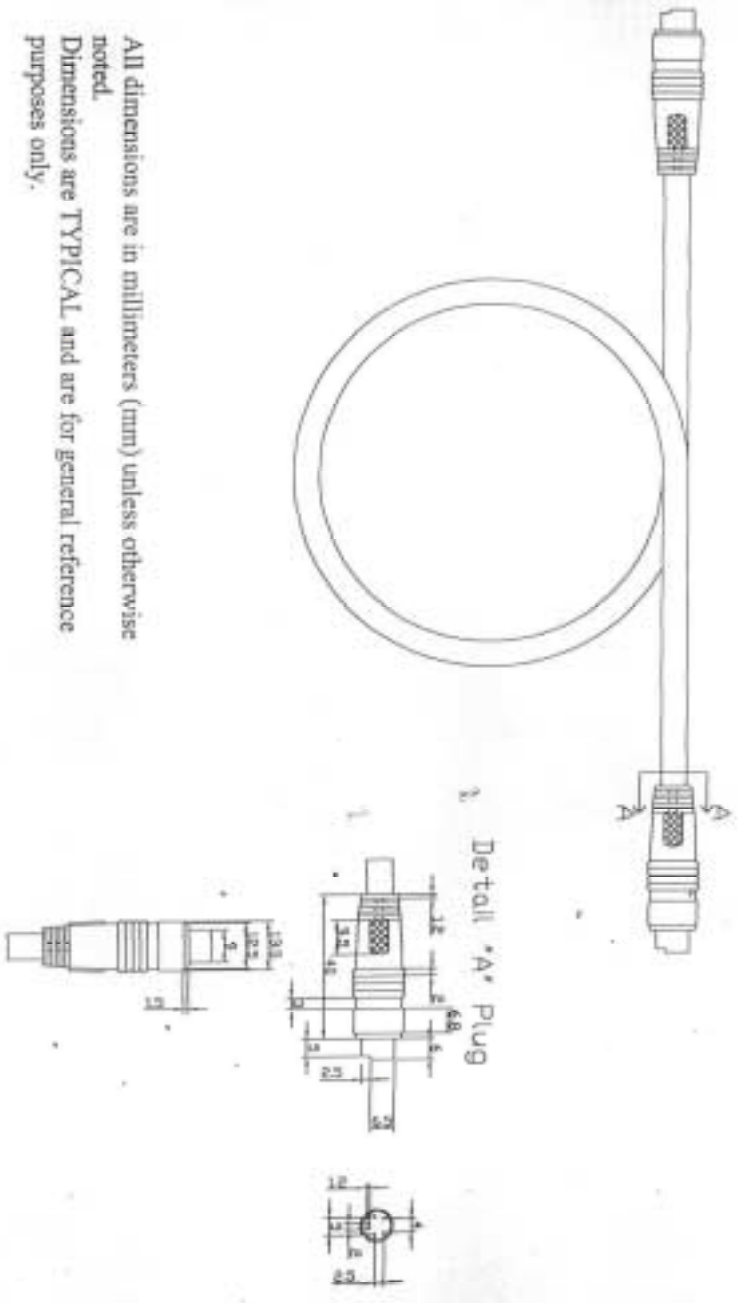

TECH SPEC



PORT FIBRE TECHNOLOGY

PRE-MADE VIDEO CABLES

110-178 to 110-180
 110-181 to 110-185
 110-024 to 110-027

Date: 31/03/2003
 Page: 2 of 2

TECHNICAL SPECIFICATION

PART NUMBERS: 110-178 0.5M 4 POLE SVHS CABLE

- 110-024 1M 4 POLE SVHS CABLE
- 110-025 3M 4 POLE SVHS CABLE
- 110-026 5M 4 POLE SVHS CABLE
- 110-027 10M 4 POLE SVHS CABLE
- 110-179 15M 4 POLE SVHS CABLE
- 110-180 20M 4 POLE SVHS CABLE

**LOW-LOSS TWIN 75ohm OFC COAXIAL CABLE,
 4 POLE GOLD PLATED S VIDEO CONNECTOR PLUG to PLUG**

SPECIFICATION

OFC OFC
 [(10/0.10mm x1C+80/0.10mm)x2C]x1C

CONSTRUCTION

	Material:	Size:	Stranding:	Diameter:	FIRST SHIELD	Material:	Diameter:	OFC Braid	Material:	Diameter:
CONDUCTOR	OFC	0.078mm	10/0.10mm	0.37mm	INNER JACKET	Material:	Diameter:	PVC	Material:	Diameter:
INSULATION	PEF				SECOND SHIELD	Material:	Diameter:		Material:	Diameter:
JACKET	PVC				Colour: MAROON					

