
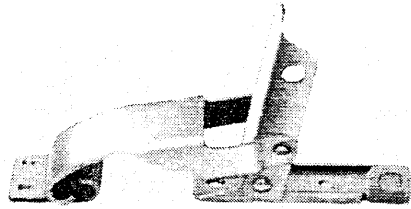


716-9553, 716-9565

TL600F



A similarly styled larger version of the TL805F, featuring a solid claw type link, which may be used with strike TL600-5 ordered separately. The facility for locking with a padlock is incorporated in the lever, providing a low profile for this latch.

A stainless steel version of this latch is available, call up TL600F-1.

TECHNICAL DATA

Max. safe load	
without distortion	: 400N (90lbf)
Ultimate tension	: 800N (180lbf)
Pull up	: 15,0mm
Material	: Cold rolled steel
Finish	: Zinc plated with chromate passivation to BS1706 Zn3.

