


PRIMO MECHANICS SCREWDRIVER FOR SLOTTED HEAD SCREWS

NF - E 74352 / ISO 2380 - 1 / DIN 5263




A x L2 x B	1	*	Ø	L1	Ø mm	7 g
5,5 x 100 x 1	616800	2	5	202	27	66
5,5 x 125 x 1	616840	8	5	227	27	71
6,5 x 125 x 1,2	616850	7	5	240	33	71
6,5 x 100 x 1,2	616810	1	5	265	33	129
8,0 x 150 x 1,2	616820	0	5	265	33	146
8,0 x 175 x 1,6	616860	6	5	290	33	173
10 x 200 x 1,6	616830	9	1	325	37	242

- Ergonomic bicolor handle designed specially to apply high tightening torques.
- Chrome vanadium blade, round and nickel-plated.



PRIMO SCREWDRIVER FOR PHILLIPS® SCREWS

NF - E 74355 / ISO 8764 - 1 / DIN 5260

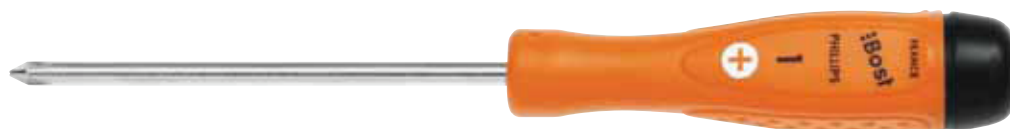

C	6 x L2	1	*	Ø	L1	Ø mm	7 g
PH 00	3 x 50	617100	2	5	130	19	25
PH 0	4 x 75	617110	1	5	155	19	31
PH 1	5 x 100	617120	0	5	202	27	62
PH 2	6 x 125	617130	9	5	240	33	123
PH 2	6 x 200	617170	5	5	315	33	105
PH 3	8 x 150	617140	8	1	275	37	195

- Ergonomic bicolor handle designed specially to apply high torque tightening.
- Chrome vanadium blade, round and nickel-plated.

PRIMO BALL SCREWDRIVER FOR PHILLIPS® SCREWS

NF - E 74355 / ISO 8764 - 1 / DIN 5260



C	6 x L2	1	*	Ø	L1	Ø mm	7 g
PH 1	5 x 25	617320	4	5	75	33	37
PH 2	6 x 25	617330	3	5	75	33	42

- Ergonomic bicolor handle designed specially to apply high tightening torques.
- Chrome vanadium blade, round and nickel-plated.

* For a full EAN, add the following before the code: 303254

Bost

Catalogue 2005