



Couplings

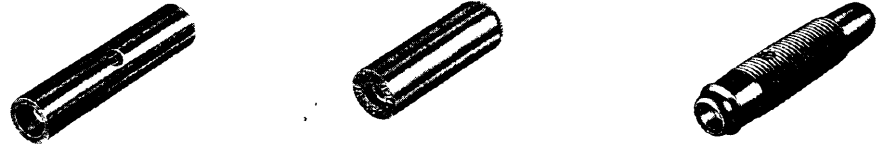

| Type | KD 10 | KUN 10 | KUN 30 |
|----------------|--|--|--|
| Order no. | 930 109- . . . (see colour index below)* | 930 189- . . . (see colour index below)* | 931 804- . . . (see colour index below)* |
| Quantity boxed | 100 each | 100 each | 50 each |

Dimensions

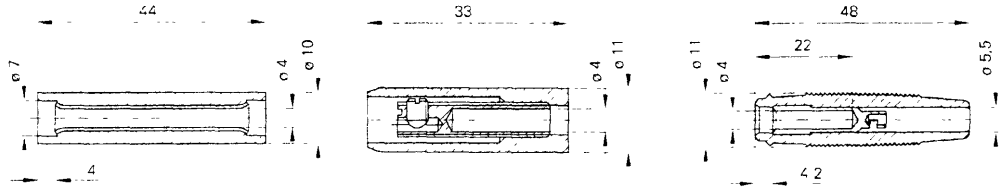

| Description | KD 10 | KUN 10 | KUN 30 |
|-------------|--|---|---|
| | Insulated coupling with nickel-plated brass tube for two 4 mm dia connectors | Insulated coupling for one 4 mm dia connector and a screw connection up to a maximum cable cross-section of 1.5 mm ² . Tin-plated brass sleeve. The sleeve is screwed into the insulated handle | Shatter-proof flexible insulated coupling for one 4 mm dia connector and a solder connection up to a maximum cable cross-section of 2.5 mm ² . Nickel-plated brass sleeve |

Technical data

| | | | |
|-------------------------------|----------------------|-------------------|-------------------------------|
| Type of connection/ Connector | | screw/ ø 4 mm | solder/ ø 4 mm |
| Continuous load current | 10 A | 16 A | 30 A |
| Volume resistance (max.) | 5 mΩ | 3 mΩ | 3 mΩ |
| Permissible temperature range | -25 °C . . +70 °C | -25 °C . . +70 °C | -25 °C . . +70 °C |
| Colour index* | black | -100 | -100 |
| | red | -101 | -101 |
| | blue | -102 | -102 |
| | yellow | -103 | -103 |
| | green | -104 | -104 |
| | assorted clr. | | 930 274-000 (KUN 10 F) |

The version **KUN 10 F** in assorted colours is made up of 20 couplings in each of the colours black, red, blue, yellow and green