


ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

REVISIONS			DOC. NO. SPC-F004 * Effective: 12/21/00 * DCP No: 680					
DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
209	A	RELEASED	HYD	4/6/01	JC	5/9/01	DJC	5/11/01

SPC Type No.	Spool Size(Feet)	Color	AWG	Stranding	Nom. O.D.
2908	100	Black	14	41/30	0.104
2933	1000				
3096	100	Red			
3121	1000				
3046	100	White			
3071	1000				
2907	100	Black	16	26/30	0.090
2932	1000				
3095	100	Red			
3120	1000				
3045	100	White			
3070	1000				
2906	100	Black	18	16/30	0.080
2931	1000				
3094	100	Red			
3119	1000				
3044	100	White			
3069	1000				
2905	100	Black	20	10/30	0.072
2930	1000				
3093	100	Red			
3118	1000				
3043	100	White			
3068	1000				
2904	100	Black	22	7/30	0.065
2929	1000				
3092	100	Red			
3117	1000				
3042	100	White			
3067	1000				

SPECIFICATIONS:

1. Insulation: PVC
2. Temperature Rating: -40°C ~ +80°C
3. Voltage Rating: 1000Volts
4. Single conductor, stranded tinned copper
5. MIL Spec: MIL-W-76B

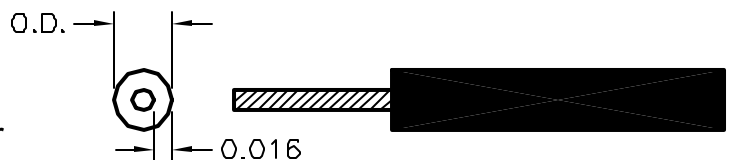

SPC-F004.DWG

DISCLAIMER:
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.



SPC TECHNOLOGY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.	DRAWN BY:	DATE:	DRAWING TITLE:			
	HISHAM ODISH	4/6/01	Medium Wall Insulation Hookup Wire			
	CHECKED BY:	DATE:	SIZE	DWG. NO.	ELECTRONIC FILE	REV
	JOHN COLE	5/9/01	A	TA-316	TA-316.DWG	A
APPROVED BY:	DATE:	SCALE: NTS		U.O.M.: INCHES		
DANIEL CAREY	5/11/01			SHEET: 1 OF 1		