
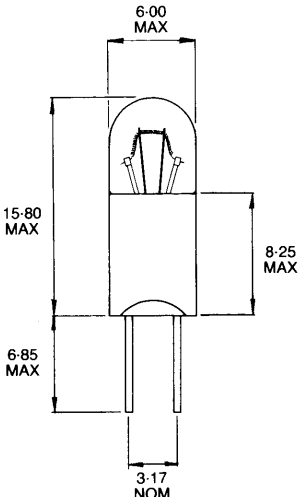


328-741  
736

328698  
75

# SUB-MINIATURE LAMPS

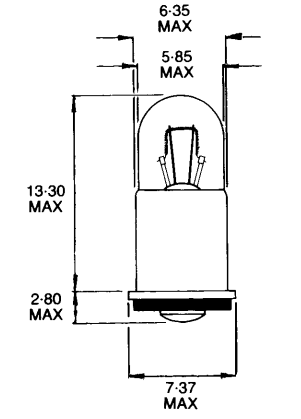

T-1 <sup>3</sup> / <sub>4</sub>	6mm	Lamp Number	Volts	Amps	Lumens	MSCP	Life (hours)	Filament Shape
<p><b>Bi-Pin</b></p>  <p>FIG. 21</p>	<p><b>CM7362</b> 5.0 0.115 1.90 0.15 20,000 C-2R  <b>CM7945</b> 6.0 0.04 0.40 0.03 10,000 C-2R  <b>CM7328</b> 6.0 0.20 7.50 0.60 1,000 C-2R  <b>CM7380</b> 6.3 0.04 0.25 0.02 20,000 C-2V  <b>CM7381</b> 6.3 0.20 5.00 0.40 20,000 C-2R</p> <p><b>CM7371</b> 12.0 0.04 1.50 0.12 10,000 C-2V  <b>CM7382</b> 14.0 0.08 3.80 0.30 15,000 C-2F  <b>CM7330</b> 14.0 0.08 6.30 0.50 1,000 C-2F  <b>CM7370</b> 18.0 0.04 1.90 0.15 10,000 C-2F  <b>CM7387</b> 28.0 0.04 4.00 0.30 7,000 C-2F</p> <p><b>CM7327</b> 28.0 0.04 4.50 0.34 4,000 C-2F  <b>CM7374</b> 28.0 0.04 2.50 0.20 20,000 C-2F  <b>CM7376</b> 28.0 0.065 8.20 0.65 5,000 C-2F</p>							
	<p><b>CM368</b> 2.5 0.20 2.80 0.22 500 C-2R  <b>726</b> 4.0 0.26 4.50 0.36 5,000 C-2R  <b>CM7333</b> 5.0 0.06 0.63 0.05 25,000 C-2R  <b>CM345</b> 6.0 0.04 0.40 0.03 10,000 C-2R  <b>723</b> 6.0 0.10 2.50 0.20 5,000 C-2R</p> <p><b>CM328</b> 6.0 0.20 7.50<sup>1</sup> 0.60<sup>2</sup> 1,000 C-2R  <b>CM380</b> 6.3 0.04 0.25 0.02 20,000 C-2V  <b>CM381</b> 6.3 0.20 5.0 0.40 20,000 C-2R  <b>CM344</b> 10.0 0.014 0.025 0.002 10,000 C-2F  <b>CM367</b> 10.0 0.04 1.00 0.08 5,000 C-2F</p> <p><b>CM394</b> 12.0 0.04 1.50 0.12 10,000 C-2V  <b>725</b> 12.0 0.10 5.00 0.40 5,000 C-2V  <b>740</b> 12.0 0.09 4.00 0.32 20,000 C-2V  <b>733</b> 14.0 0.037 1.60 0.13 5,000 C-2F  <b>CM330</b> 14.0 0.08 6.30 0.50 1,000 C-2F</p> <p><b>CM382</b> 14.0 0.08 3.80 0.30 15,000 C-2F  <b>CM370</b> 18.0 0.04 1.90 0.15 10,000 C-2F  <b>1116</b> 28.0 0.024 1.70 0.14 2,500 C-2F  <b>CM385</b> 28.0 0.04 2.50 0.20 50,000 C-2F  <b>CM387</b> 28.0 0.04 3.80 0.30 7,000 C-2F</p> <p><b>CM327</b> 28.0 0.04 4.20 0.34 4,000 C-2F  <b>727</b> 28.0 0.04 4.50 0.36 4,000 C-2F  <b>736</b> 28.0 0.04 4.00 0.32 10,000 C-2F  <b>CM376</b> 28.0 0.06 4.30 0.34 25,000 C-2F  <b>729</b> 28.0 0.08 10.00 0.80 2,000 C-2F</p> <p><b>730</b> 48.0 0.025 4.00 0.32 2,500 C-2F  <b>777</b> 60.0 0.02 2.20 0.17 3,000 CC-2F</p>							
	<p><b>Midget Flange (SX6s)</b></p>  <p>FIG. 22</p>	<p><b>CM368</b> 2.5 0.20 2.80 0.22 500 C-2R  <b>726</b> 4.0 0.26 4.50 0.36 5,000 C-2R  <b>CM7333</b> 5.0 0.06 0.63 0.05 25,000 C-2R  <b>CM345</b> 6.0 0.04 0.40 0.03 10,000 C-2R  <b>723</b> 6.0 0.10 2.50 0.20 5,000 C-2R</p> <p><b>CM328</b> 6.0 0.20 7.50<sup>1</sup> 0.60<sup>2</sup> 1,000 C-2R  <b>CM380</b> 6.3 0.04 0.25 0.02 20,000 C-2V  <b>CM381</b> 6.3 0.20 5.0 0.40 20,000 C-2R  <b>CM344</b> 10.0 0.014 0.025 0.002 10,000 C-2F  <b>CM367</b> 10.0 0.04 1.00 0.08 5,000 C-2F</p> <p><b>CM394</b> 12.0 0.04 1.50 0.12 10,000 C-2V  <b>725</b> 12.0 0.10 5.00 0.40 5,000 C-2V  <b>740</b> 12.0 0.09 4.00 0.32 20,000 C-2V  <b>733</b> 14.0 0.037 1.60 0.13 5,000 C-2F  <b>CM330</b> 14.0 0.08 6.30 0.50 1,000 C-2F</p> <p><b>CM382</b> 14.0 0.08 3.80 0.30 15,000 C-2F  <b>CM370</b> 18.0 0.04 1.90 0.15 10,000 C-2F  <b>1116</b> 28.0 0.024 1.70 0.14 2,500 C-2F  <b>CM385</b> 28.0 0.04 2.50 0.20 50,000 C-2F  <b>CM387</b> 28.0 0.04 3.80 0.30 7,000 C-2F</p> <p><b>CM327</b> 28.0 0.04 4.20 0.34 4,000 C-2F  <b>727</b> 28.0 0.04 4.50 0.36 4,000 C-2F  <b>736</b> 28.0 0.04 4.00 0.32 10,000 C-2F  <b>CM376</b> 28.0 0.06 4.30 0.34 25,000 C-2F  <b>729</b> 28.0 0.08 10.00 0.80 2,000 C-2F</p> <p><b>730</b> 48.0 0.025 4.00 0.32 2,500 C-2F  <b>777</b> 60.0 0.02 2.20 0.17 3,000 CC-2F</p>						

<sup>1</sup> 4.3 Lumens at 5V

<sup>2</sup> 0.34 MSCP at 5V