




ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

SPC-F005.DWG

REVISIONS

DOC. NO. SPC-F005 \* Effective: 7/8/02 \* DCP No: 1398

DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
615	A	RELEASED	JWM	12/4/01	HYO	12/4/01	DJC	12/4/01
1355	B	Added 76-116 and 76-118	JWM	1/2/04	JC	1/2/04	JC	1/2/04

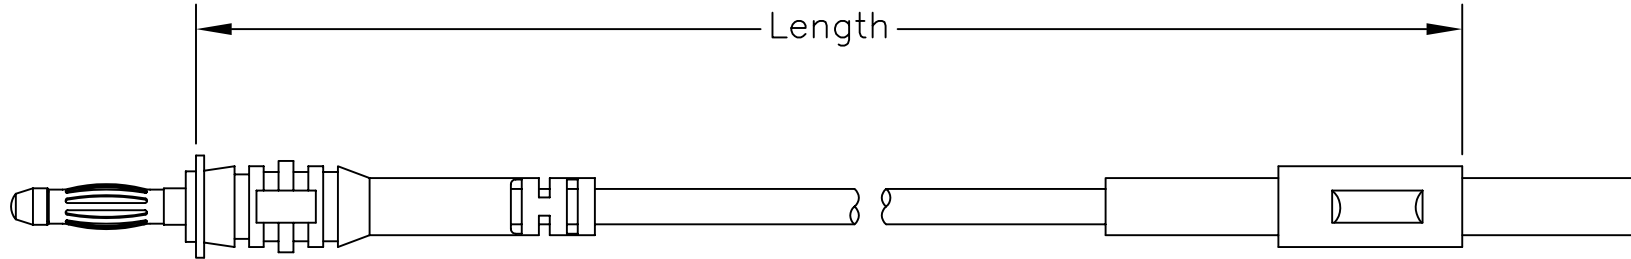

**NOTES:**

1. Rating: 1,200V, 12 Amps AC/DC
2. Materials:  
 Body-Polyamide (Nylon)  
 Plug - Bronze & Brass Nickel Plated
3. Lead Wire:  
 Jacket - Flexible PVC  
 Conductor: 0.75mm<sup>2</sup>
4. Temperature: -20°C ~ +80°C

Tenma Part No.	Length	Internal Resistance (mΩ)	Color
76-098	10 [25cm]	12	Black
76-099	10 [25cm]	12	Red
76-100	20 [50cm]	15	Black
76-101	20 [50cm]	15	Red
76-116	40 [100cm]	20	Black
76-118	40 [100cm]	20	Red

DISCLAIMER:  
 ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

TOLERANCES:  
 UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWN BY:	DATE:
Jeff McVicker	12/4/01
CHECKED BY:	DATE:
Hisham Odish	12/4/01
APPROVED BY:	DATE:
Daniel Carey	12/4/01

DRAWING TITLE: <b>Plug Leads, 4mm Straight Plug to Straight Jack</b>			
SIZE	DWG. NO.	ELECTRONIC FILE	REV
A	TA-458	TA-458.dwg	B
SCALE: NTS	U.O.M.: INCHES [mm]	SHEET: 1 OF 1	