

9155 MOBO™ Battery Connector




GENERAL DESCRIPTION:

The standard battery connector is specifically designed for mobile equipment.

The connectors are available in 3, 4, and 5 contact positions all on a 2.50mm pitch. The insulator height provides a 3mm spacing, with various contact nose heights from 1.20mm to 2.60mm, to provide spacing options to the end user.

All contacts are stamped and are rated to 3A, with plating options in Tin or Gold. Parts are supplied in tape and reel for automatic pick and place. Optional retaining brackets are available to provide greater strength when connected to the PCB.

Whatever your requirements, the 9155 series Battery Connector can also be customised to suit your application.

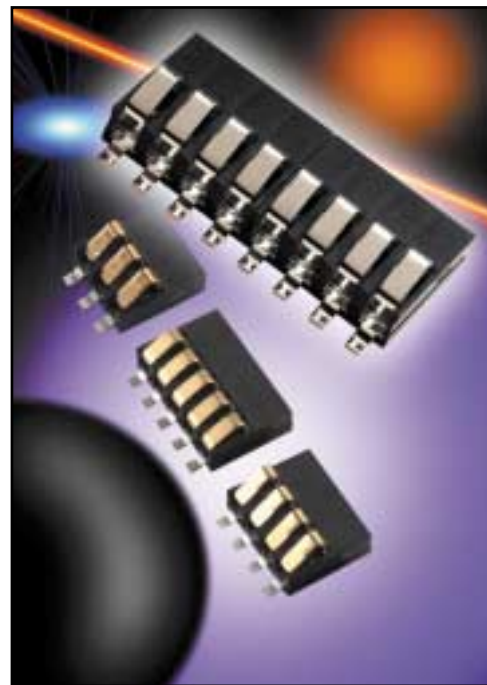


APPLICATIONS

- Mobile Phones,
- PDA,
- Medical,
- PMR,
- Industrial.


KEY FEATURES AND BENEFITS

- Suitable for 5000 mechanical cycles.
- Variety of contact heights offered to suit different mechanical designs.
- Connectors can be end to end stackable.


3 WAY BATTERY CONNECTOR

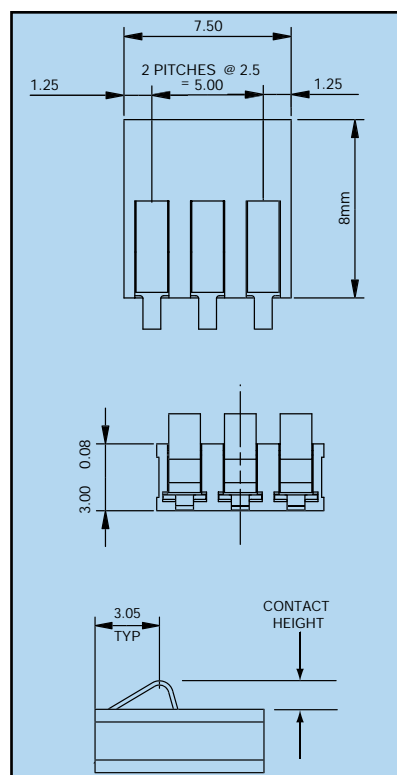

4 WAY BATTERY CONNECTOR

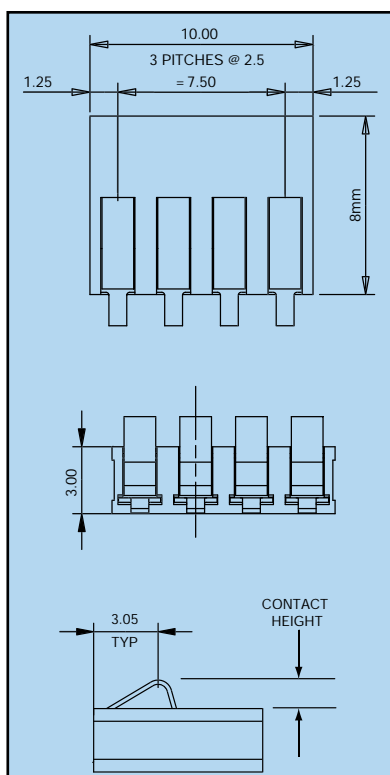


5 WAY BATTERY CONNECTOR

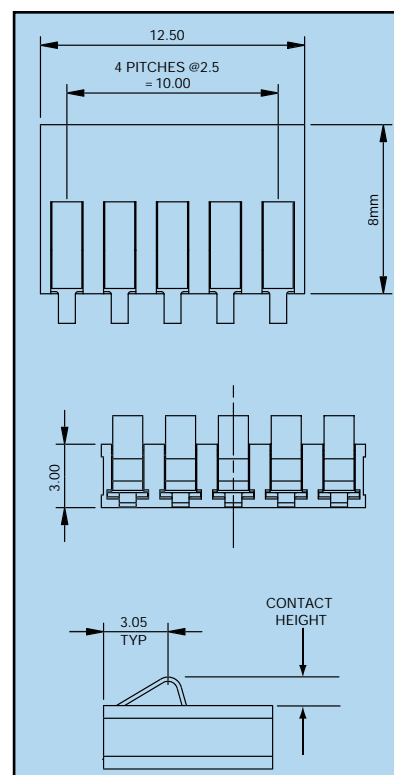


9155 MOBO™ Battery Connector




3 WAY PCB BOARD LAYOUT

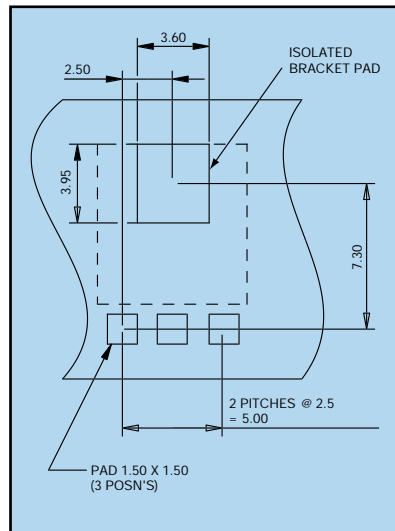

4 WAY PCB BOARD LAYOUT

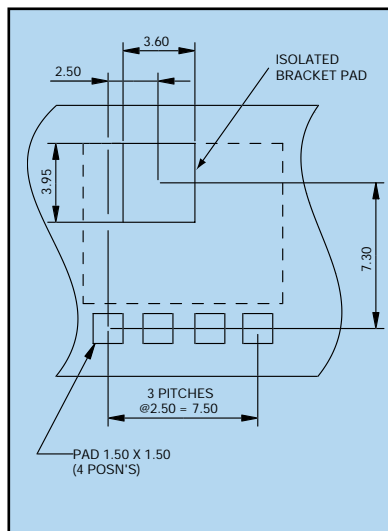

5 WAY PCB BOARD LAYOUT

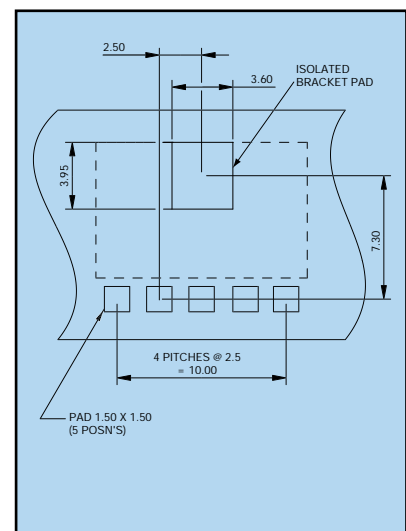

HOW TO ORDER

00 └	9155 └	003 └	00 └	1 └	00 └	1 └
<u>PREFIX</u>	<u>SERIES</u>	<u>NO. OF WAYS</u>	<u>CONTACT FORCE</u>	<u>CONTACT HEIGHT</u>	<u>BRACKET</u>	<u>PLATING OPTION</u>
00 = Standard 58 = Special		3 = 003 4 = 004 5 = 005	00 = Standard Force	1 = 1.20 / 1.50 2 = 1.80 / 2.10 3 = 2.30 / 2.60	00 = No Bracket 01 = With Bracket	1 = 0.4 µm Selective Gold, Tin Tail 2 = Tin All Over

NOTICE: Specifications are subject to change without notice. Contact your nearest AVX Sales Office for the latest specifications. All statements, information and data given herein are believed to be accurate and reliable, but are presented without guarantee, warranty, or responsibility of any kind, expressed or implied. Statements or suggestions concerning possible use of our products are made without representation or warranty that any such use is free of patent infringement and are not recommendations to infringe any patent. The user should not assume that all safety measures are indicated or that other measures are indicated or that other measures may not be required. Specifications are typical and may not apply to all applications.



USA

AVX Myrtle Beach, SC
Corporate Offices
Tel: 843-448-9411
Fax: 843-626-5292

AVX Southwest, AZ
Tel: 480-539-1496
Fax: 480-539-1501

AVX Northwest, WA
Tel: 360-669-8746
Fax: 360-699-8751

AVX South Central, TX
Tel: 972-669-1223
Fax: 972-669-2090

AVX North Central, IN
Tel: 317-848-7153
Fax: 317-844-9314

AVX Southeast, NC
Tel: 919-878-6357
Fax: 919-878-6462

AVX Mid-Pacific, MN
Tel: 952-974-9155
Fax: 952-974-9179

AVX Canada
Tel: 905-564-8959
Fax: 905-564-9728

EUROPE

AVX Limited, England
European Headquarters
Tel: ++44 (0)1252 770000
Fax: ++44 (0)1252 770001

AVX S.A., France
Tel: ++33 (1) 69.18.46.00
Fax: ++33 (1) 69.28.73.87

AVX GmbH, Germany - AVX
Tel: ++49 (0) 8131 9004-0
Fax: ++49 (0) 8131 9004-44

AVX GmbH, Germany - Elco
Tel: ++49 (0) 2741 2990
Fax: ++49 (0) 2741 299299

AVX Elco - Newmarket
Tel: ++44 (0)1638 675000
Fax: ++44 (0)1638 675002

AVX srl, Italy
Tel: ++390 (0)2 614571
Fax: ++390 (0)2 614 2576

AVX Czech Republic s.r.o.
Tel: ++420 (0)467 558340
Fax: ++420 (0)467 558345

ASIA-PACIFIC

AVX/Kyocera, Singapore
Asia-Pacific Headquarters
Tel: (65) 258-2833
Fax: (65) 350-4880

AVX/Kyocera, Hong Kong
Tel: (852) 2-363-3303
Fax: (852) 2-765-8185

AVX/Kyocera, Korea
Tel: (82) 2-785-6504
Fax: (82) 2-784-5411

AVX/Kyocera, Taiwan
Tel: (886) 2-2696-4636
Fax: (886) 2-2696-4237

AVX/Kyocera, China
Tel: (86) 21-6249-0314-16
Fax: (86) 21-6249-0313

AVX/Kyocera, Malaysia
Tel: (60) 4-228-1190
Fax: (60) 4-228-1196

Elco, Japan
Tel: 045-943-2906/7
Fax: 045-943-2910

Kyocera, Japan - AVX
Tel: (81) 75-604-3426
Fax: (81) 75-604-3425

Kyocera, Japan - KDP
Tel: (81) 75-604-3424
Fax: (81) 75-604-3425