

DO NOT SCALE

DIMENSIONS IN mm


METRIC

THIRD ANGLE
PROJECTION



NOTES:

- 1 THIS RECEPTACLE ACCEPTS SIZE 20 REC. CONTACTS.
 - 2 MAXIMUM WIRE INSULATION RECOMMENDED FOR USE WITH THIS RECEPTACLE IS 1,73 DIA. MAX..
 - 3 RETENTION TINES ARE AN INTEGRAL PART OF INSERT.
 - 4 FOLLOWING INSERTION/REMOVAL TOOLS ARE RECOMMENDED FOR USE WITH THESE CONNECTORS:
 32-28AWG/28-24AWG CONTACTS
 91067-3 INSERTION/REMOVAL
 726363-1 INSERTION ONLY
 24-20AWG CONTACTS
 726363-1 INSERTION ONLY
 726364-1 REMOVAL ONLY
- ⚠️ INSERTS: GLASSFILLED SELF-EXTINGUISHING PBT, COLOR BLACK.
 ⚠️ AMP DATE CODE, AMP PART NUMBER, INK STAMPED.
 ⚠️ RAISED CAVITY IDENTIFICATION 0,8 HIGH.
 ⚠️ RAISED CAVITY IDENTIFICATION NUMBERS ON WIRE SIDE ARE WHITENED FOR 164534-9.

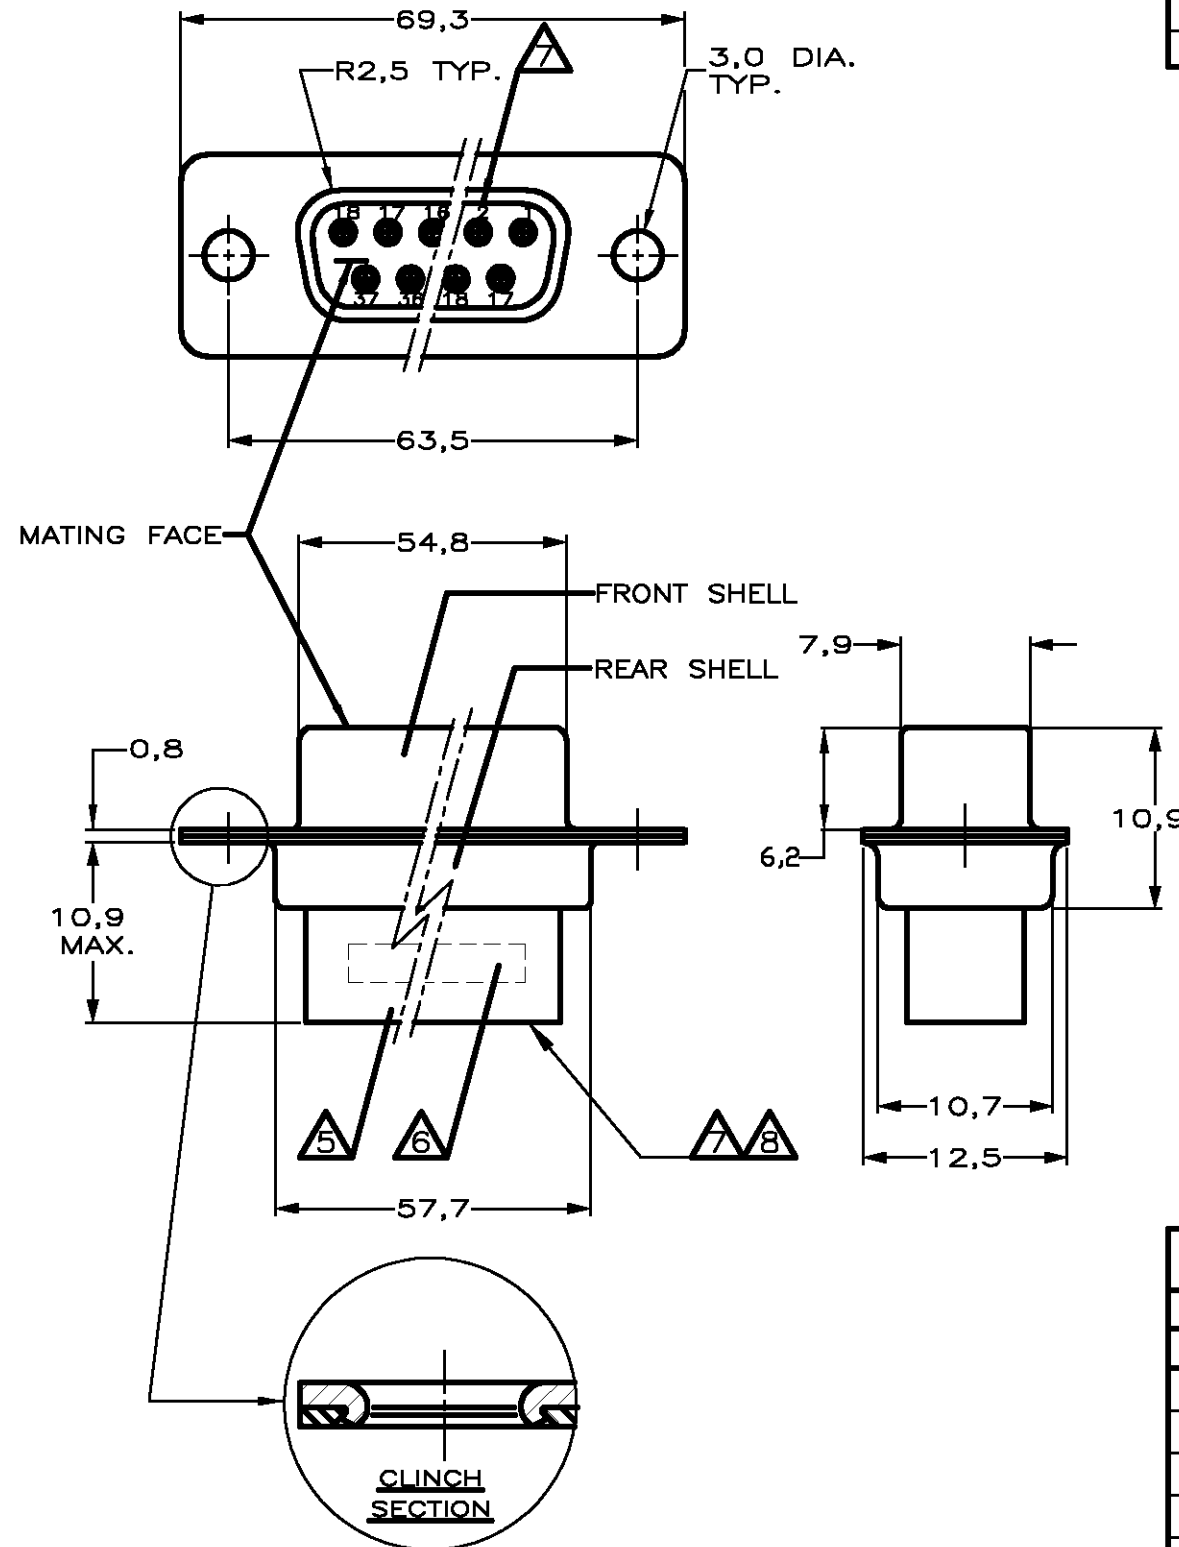

BRIGHT TIN	BRIGHT TIN	STEEL	164534-9	⚠️
BRIGHT TIN	BRIGHT TIN	STEEL	164534-4	
PLATING FRONT SHELL	PLATING REAR SHELL	MATERIAL SHELLS	PARTNUMBER	
-	-	-	CUSTOMER DRAWING FOR REFERENCE ONLY WILL NOT BE UPDATED	
-	-	-	© COPYRIGHT 19 - BY AMP HOLLAND B.V.	
-	-	-	ALL INTERNATIONAL RIGHTS RESERVED. AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN AND/OR PATENTS PENDING.	
-	-	-	THIS DRAWING IS UNPUBLISHED	
-	-	-	RELEASED FOR PUBLICATION	
K	SR10-0457-02	KV	24 OCT 02	 Tyco Electronics Corporation Oostkamp - BELGIUM
J	SR10-0382-02	KV	23 AUG 02	
H	EH-0314-99	D.K. W.S.	11 FEB 99	
LTR.	REVISION RECORD	DR. CHK.	DATE	NAME 37 POS HDP-20 RECEPTACLE CONNECTOR SIZE 4
DR.: D. KESSLER	CHK.: W. SOOMERS	APP.: W. SOOMERS	DWG.No.	REV.LTR. SHEET
DATE: 11 FEB 99	DATE: -	DATE: -	C-164534	K 1 OF 1