
Comus Group of Companies

Drawings not to scale

All dimensions in mm (inches) nominal

PRODUCT DATA SHEET

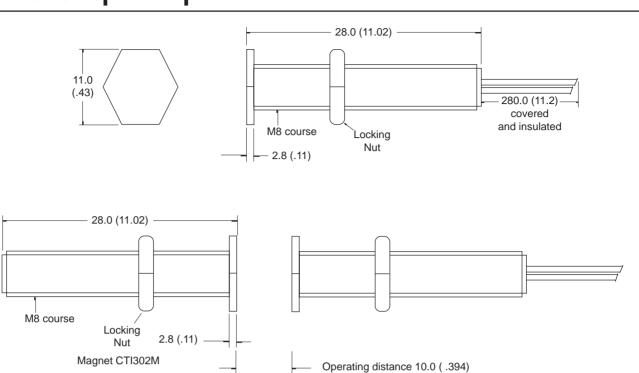

SPECIFICATION

CONTACT FORM/STYLE		Normally Open	
SWITCHING VOLTAGE	Max. Vac	230	
SWITCHING CURRENT	Max. A	0.5	
SWITCHING CAPACITY (RESISTIVE)	Max. VA	10	
CONTACT RESISTANCE	Max. $m\Omega$	200	
SWITCHING DISTANCE	Min. mm	10	
OPERATING TEMPERATURE	Deg. °C	-20° + 85°	
STORAGE TEMPERATURE	Deg. °C	-25° + 85°	
CASE MATERIAL		Brass	

CYLINDRICAL MAGNETIC PROXIMITY SWITCHES

PART NUMBER CTI302

Rev. No.	Revision Note	Date	Signature
В	Web Site 1999	1-5-99	RG

As part of the company policy of continued product improvement, specifications may change without notice. Our sales office will be pleased to help you with the latest information on this product range and details of our full design and manufacturing service. All products are supplied to our standard conditions of sale otherwise agreed in writing.

The Comus Group of Companies consist of:
Assemtech Europe
E. Bachem GmbH
Comus International
W. Gunther GmbH
Gunther Belgium
Gunther France
S.T.G.