


ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART  
CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

REVISIONS			DOC. NO. SPC-F005 • Effective: 12/21/08 • DCP No: 980					
DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
615	A	RELEASED	JWM	8/21/08	JC		DJC	

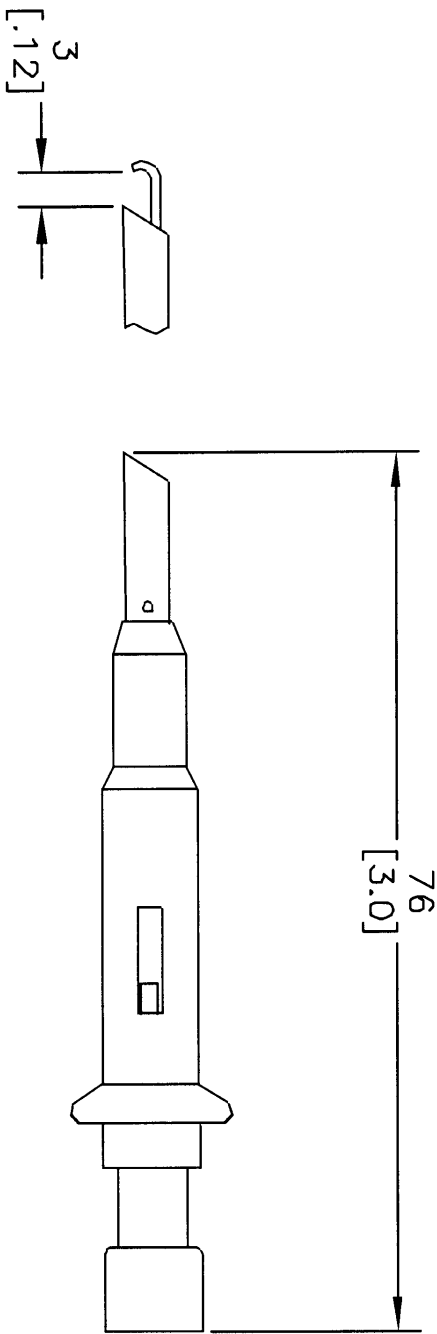

#### Notes

1. Fits probes with 4mm Contact Tip
2. IEC61010 Ratings: 500V/CAT I, 5A
3. Materials: Body - Polymide(Nylon)  
Tip - Brass, Nickel Plated
4. Internal Resistance: <5 milliohms
5. Temperature: -20°C ~ +80°C

DISCLAIMER  
ALL DIMENSIONS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION  
AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE  
BEYOND OUR CONTROL, THE USER SHALL RETAIN THE RESPONSIBILITY OF THE PRODUCT FOR THE  
INTENDED USE, AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

**TENMA**  
CORPORATION

DRAWN BY:		DATE:	DRAWING TITLE:			
Jeff McVickar		6/21/00	Insulated Probe Spring Hook - Red			
CHECKED BY:		DATE:	SIZE		DWG. NO.	ELECTRONIC FILE
JOHN COLE			A		76-032	16F7703.dwg
APPROVED BY:		DATE:	SCALE:		NTS	U.O.M.: Millimeters [Inches]
Daniel Corey						SHEET: 1 OF 1

SPC-F005.DWG

3421697