


DRG No. CP32903	ISSUE 3	TYPE No. OXL/CLH/100/-/Flxx/-	DIM. IN: MILLIMETRES	ODC:OS:40077 ISSUE 1 DO NOT SCALE	THIS DRAWING AND THE COPYRIGHT AND DESIGN RIGHT THEREIN ARE THE PROPERTY OF OXLEY DEVELOPMENTS CO. LTD. AND MUST NOT BE REPRODUCED OR DISCLOSED TO A THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF THE COMPANY.	ISS 3	MODIFICATION CHANGE No. 05/243	DATE 18.7.05
---------------------------	-------------------	---	-------------------------	---	--	-----------------	-----------------------------------	------------------------

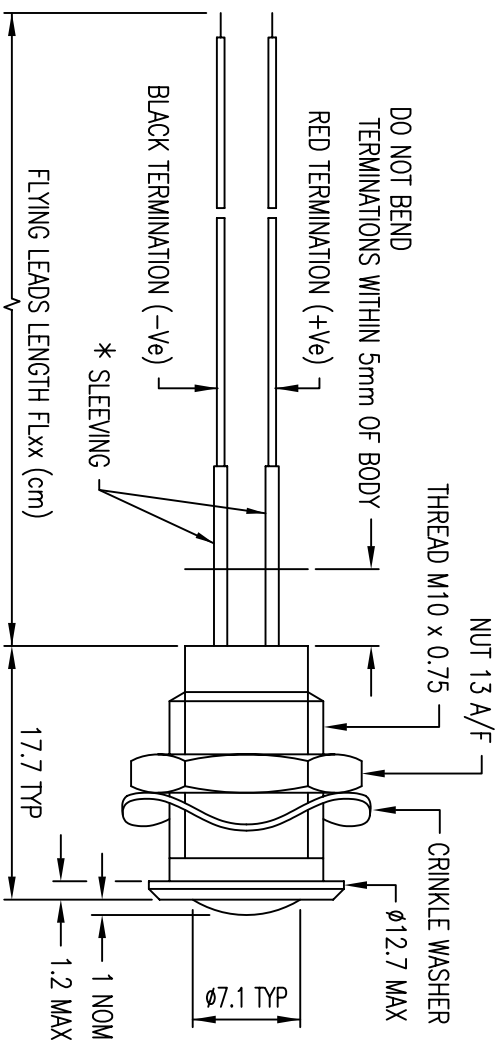

* FOR 110V : BLUE SLEEVING ON RED TERMINATION & BLACK SLEEVING ON BLACK TERMINATION
 FOR 240V : BLACK SLEEVING ON BOTH TERMINATIONS

MATERIALS AND FINISHES	
DESCRIPTION	MATERIAL, FINISH
BODY	ALUMINIUM, MATT BLACK ANODISED
LENS	POLYCARBONATE
TERMINATIONS	FLYING LEADS
NUT	ALUMINIUM ALLOY
WASHER	BeCu. TIN PLATED

OPERATING AND STORAGE TEMPERATURE : -40°C to 85°C

ELECTRICAL CHARACTERISTICS												
	AGdas RED	YELLOW	GREEN	BLUE	WHITE	RATED VOLTAGE						
LUMINOUS INTENSITY TYPICAL (mcd AT RATED VOLTAGE)	110	240	110	240	110	240	110	240	110	240	110	240
FORWARD CURRENT (mA) TYP	300	150	250	125	315	160	300	150	250	125	300	150
REVERSE VOLTAGE (V) MAX	5	2.5	2.5	1	5	2.5	5	2.5	5	2.5	5	2.5

MOUNTING DETAILS	
MOUNTING HOLE :	φ10.15±0.1
RECOMMENDED MOUNTING TORQUE :	1Nm
CHASSIS THICKNESS :	1.5mm (Min)

MATERIAL	DRAWN
AS STATED	<i>Simon Russam</i>
FINISH AS STATED	CHECKED <i>T. DAVIS</i>
PLATING AS STATED	APPROVED DA01/322

WHEN ORDERING, PLEASE STATE TYPE NUMBER, SPECIFYING FLYING LEAD LENGTH, OPERATING VOLTAGE & LED COLOUR

e.g OXL/CLH/100/110/FL20/BLUE
 OPERATING VOLTAGE REQUIRED (110Vac or 240Vac)
 FLYING LEAD LENGTH IN cm
 LED COLOUR REQUIRED (AGdas RED, YELLOW, GREEN, BLUE or WHITE)

TOLERANCE AS STATED	DATE
AS STATED	2 APR 01

REMARKS
TITLE LOW PROFILE HIGH INTENSITY LED INDICATOR LAMP

OXLEY	Tel. 01229 582621 Fax. 01229 585090	OXLEY DEVELOPMENTS COMPANY LTD.	Ulverston Cumbria ENGLAND LA12 9QG	SCALE 2 : 1	TYPE No. OXL/CLH/100/-/Flxx/-	DRG No. CP32903	ISSUE 3
--------------	--	--	---	----------------	----------------------------------	---------------------------	-------------------