

Encoder Line Drivers

Technical Data

HEDL-556x

Features

- Available on Encoder Kit Housing (HEDM-5500 Series)
- Complementary Outputs
- Industry Standard Line Driver IC
- Single 5 V Supply
- Onboard Bypass Capacitor
- Operating Temperature up to $70^{\circ}\mathrm{C}$

Description

Line Drivers are available for the HEDM-5500 series encoders. The line driver offers enhanced performance when the encoder is used in noisy environments, or when it is required to drive long distances.

The HEDL-556x series utilizes an industry standard line driver IC, 26C31, which provides complementary outputs for each encoder channel. Thus, the output of the line driver encoder is A, \overline{A} , B, \overline{B} . Suggested line receivers are 26LS32 and 26LS33.

For additional information, please refer to: HEDM-5500/5505 datasheet.

Note: Agilent Technologies encoders are not recommended for use in safety critical applications. Eg. ABS braking systems, power steering, life support systems and critical care medical equipment. Please contact sales representative if more clarification is needed.




Device Characteristics

Parameter	Characteristic	Notes			
Termination	10 conductor ribbon cable with 10 position IDC Berg connector	See pinout			
Electrical Outputs	Complementary outputs: A, \overline{A} , B, \overline{B} , I, \overline{I}	I and \overline{I} available only on three channel encoders			
Line Driver Components	26C31 line driver IC, decoupling capacitor on PC board.				
Operating Temperature	0°C to 70°C				
Storage Temperature	-40°C to 70°C				

ESD WARNING: NORMAL HANDLING PRECAUTIONS SHOULD BE TAKEN TO AVOID STATIC DISCHARGE.


Line Driver Package Dimensions

For detailed dimensions on encoder packages, please refer to the HEDM-5500/5505 data sheet.

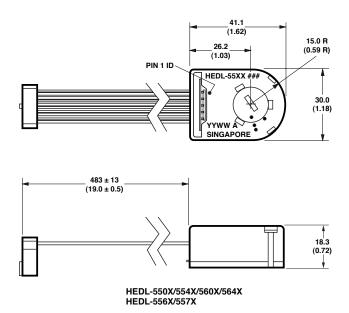


NOTE: DIMENSIONS IN MILLIMETERS (INCHES)

Waveforms




Block Diagram



Pinouts

10-PIN CONNECTOR

NO.	COLOR	PARAMETER
1 2 3 4 5 6 7 8 9 10	BROWN RED ORANGE YELLOW GREEN BLUE VIOLET GREY WHITE BLACK	NC V _{CC} (+5 V) GND NC A B B I (INDEX) I (INDEX)



10 POSITION IDC CONNECTOR CENTER POLARIZED.


Note: I/\overline{I} only available on three channel encoders.

Line Driver Base Parts Available:

Line Driver Base Part	Channels	Refer to the following encoder data sheet for additional information and option codes (XXX = resolution and/or shaft size)
HEDL-5560#XXX	A, B	HEDM-5500#XXX
HEDL-5561#XXX	A, B	HEDM-5505#XXX



Ordering Information

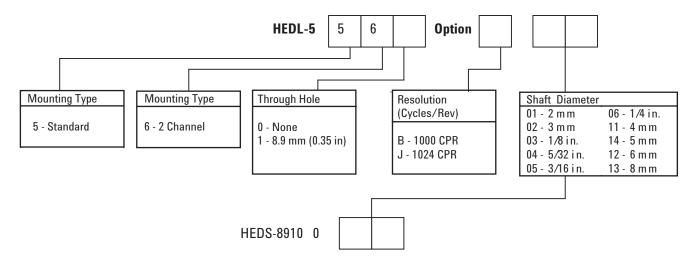

(Included with each order of HEDL-556x two channel encoders)

		01	02	04	05	06	11	12	13	14
HEDL-5560#	В		*				*		*	*
HEDL-5561#	J					*				

For product information and a complete list of Agilent contacts and distributors, please go to our web site.

www.agilent.com/semiconductors

E-mail: SemiconductorSupport@agilent.com

Data subject to change.

Copyright © 2004 Agilent Technologies, Inc.

November 1, 2004

5989-1823EN