

JPS130/JPS130-M Series



- High Efficiency - Up to 90%
- Medical Approval (JPS130-M Versions)
- Zero Voltage Switching Technology
- Small Footprint
- High Power Density
- 100 W Convection Cooled
- Single & Multiple Outputs

Specification

Input

Input Voltage	• 90-264 VAC (170-370 VDC)
Input Frequency	• 47-63 Hz
Input Current	• 2 A max at 115 VAC 1 A max at 230 VAC
Inrush Current	• 30 A at 115 VAC, 60 A at 230 VAC
Power Factor	• 0.99 typical
Earth Leakage Current	• JPS130: 1.5 mA max at 264 VAC/60Hz JPS130-M: 250 μ A max at 264 VAC/60Hz
Input Protection	• Internal 3.15A/250 V fuse

Output

Output Voltage	• See table
Output Voltage Trim	• \pm 10% on single output models, \pm 5% on multiple output models, other voltages will track by the same percentage
Minimum Load	• Single output: no minimum load required Multiple outputs: (see note 1)
Start Up Rise Time	• <20 ms
Hold Up Time	• 16 ms typical
Line Regulation	• \pm 0.5% V_{min} to V_{max}
Load Regulation	• \pm 1%, \pm 5% for auxiliaries
Transient Response	• 4% max. deviation, 500 μ s recovery time for a 25% load change
Ripple & Noise	• \pm 1% max pk-pk (see note 4)
Overvoltage Protection	• 110-140% on V1 only, recycle input to reset
Overload Protection	• 120-150%, auto recovery
Short Circuit Protection	• Trip and restart (Hiccup mode)
Temperature Coefficient	• 0.05% / $^{\circ}$ C
Remote Sense	• Single output models only, compensates for up to 0.5 V drop

General

Efficiency	• Up to 90% nominal line, full load
Isolation	• JPS130: 3000 VAC Input to Output (JPS130) 4000 VAC Input to Output (JPS130-M) 1500 VAC Input to Ground 500 VAC Output to Ground
Switching Frequency	• 120 kHz fixed \pm 10% for both active PFC and PWM
Power Density	• 6.7 W/In ³
MTBF	• 250 kHrs per MIL-HDBK-217F at 25 $^{\circ}$ C

Environmental

Operating Temperature	• 0 $^{\circ}$ C to +70 $^{\circ}$ C, (see derating curves)
Cooling	• 130 W with 18 CFM airflow 100 W convection cooling
Operating Humidity	• 5-95% RH, non-condensing
Storage Temperature	• -20 $^{\circ}$ C to +85 $^{\circ}$ C
Operating Altitude	• 3000 m

EMC & Safety

Emissions	• EN55022, level B conducted FCC 20780, level B conducted
Harmonic Currents	• EN61000-3-2
Voltage Flicker	• EN61000-3-3
ESD Immunity	• EN61000-4-2, level 3 Perf Criteria B
Radiated Immunity	• EN61000-4-3, 10 V/m Perf Criteria B
EFT/Burst	• EN61000-4-4, level 3 Perf Criteria B
Surge	• EN61000-4-5, level 3 Perf Criteria B
Conducted Immunity	• EN61000-4-6, 3 V Perf Criteria A
Dips & Interruptions	• EN61000-4-11, 30% 10 ms 60% 100 ms, 100% 5000 ms Perf Criteria A, B, B
Safety Approvals	• JPS130: EN60950, UL1950, CSA C22.2 No. 234, CE Mark LVD. JPS130-M: UL2601-1, EN60601-1, CSA C22.2 No. 601.1 CE Mark LVD.

Models and Ratings

Output Power ⁽³⁾	Output Voltage	Output Current		Ripple & Noise Pk-Pk ⁽⁴⁾	Model Number ⁽¹⁾
		Convection Cooled	18 CFM		
100 W	3.3 V	25.0 A	33.3 A	50 mV	JPS130PS03 *
130 W	5.0 V	20.0 A	26.0 A	50 mV	JPS130PS05 †*
	12.0 V	9.0 A	10.8 A	120 mV	JPS130PS12 †*
	15.0 V	7.0 A	8.7 A	120 mV	JPS130PS15 †*
	24.0 V	4.5 A	5.4 A	200 mV	JPS130PS24 †*
	28.0 V	3.8 A	5.4 A	200 mV	JPS130PS28
	48.0 V	2.3 A	2.7 A	200 mV	JPS130PS48 †*
130 W	5.0 V ⁽¹⁾	11.5 A	15.0 A	50 mV	JPS130PT31 ⁽²⁾ †*
	12.0 V ⁽²⁾	3.0 A	4.0 A	100 mV	
	-12.0 V ⁽²⁾	0.5 A	0.5 A	100 mV	
130 W	3.3 V ⁽¹⁾	10.0 A	15.0 A	50 mV	JPS130PT30 ⁽²⁾ †*
	5.0 V ⁽²⁾	8.0 A	15.0 A	50 mV	
	12.0 V ⁽²⁾	0.5 A	0.5 A	100 mV	

Notes

1. 20% minimum load required on V1 to maintain stated regulation for auxiliary rails.
2. Load regulation of auxiliary rails is defined over the range of 60% of rated output ±40%.
3. Maximum power with 18 CFM of forced air.
4. Ripple and noise measured over 15 MHz bandwidth with a 47 µF electrolytic capacitor and 0.47 µF ceramic capacitor.
5. Covers available, order part number 'JPS130 COVER†' or add suffix '-C' to receive the unit with cover fitted.


† Available from Farnell InOne. See pages 236-237

*Available from Newark InOne. See page 238

Mechanical Details

All dimensions are in inches (mm)

Tolerance: 0.02 (0.4) max.

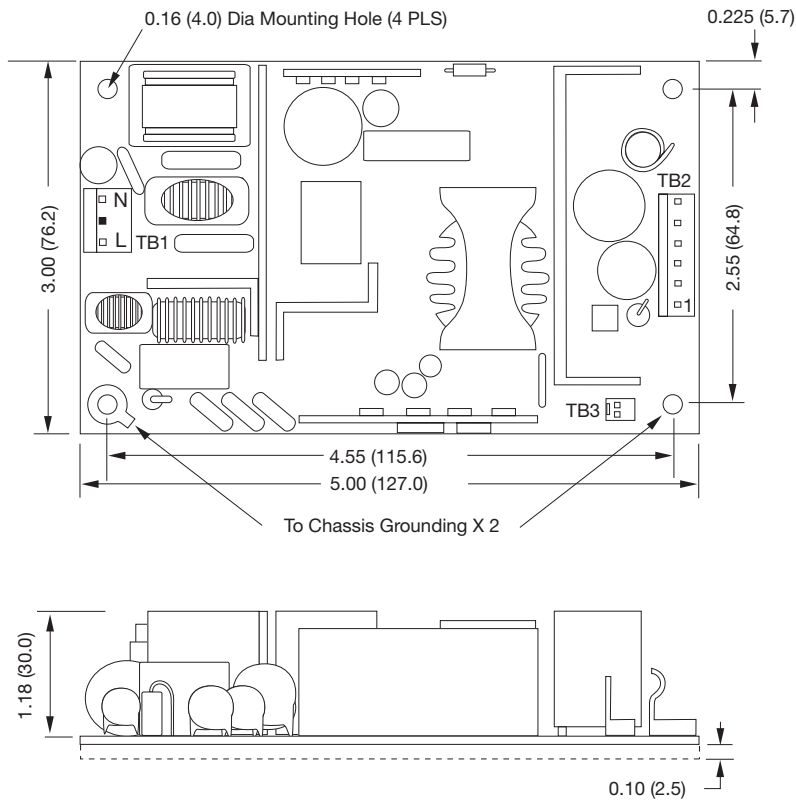

Notes

1. Single output model shown, add extra 0.08" (2.0mm) to overall height for triple models.
2. AC input connector (TB1): Molex 5277-02A or equivalent.
3. DC output connector (TB2): Molex 5273 or equivalent. Except JPS130PS03 which has a 6 position terminal screw block. Dinkle part number CHK508V Series accepts 24-12 AWG wire.
4. TB3: Molex 5045-02A or equivalent. Single output units - TB3 is remote sense. Triple output units - TB3 is 12 V, 450 mA fan output.



Models and Ratings

Output Power	Output Voltage	Output Current		Ripple & Noise Pk-Pk ⁽⁴⁾	Model Number ⁽¹⁾
		Convection Cooled	18 CFM		
130 W	5.0 V	20.0 A	26.0 A	50 mV	JPS130PS05-M †
	12.0 V	9.0 A	10.8 A	120 mV	JPS130PS12-M †
	15.0 V	7.0 A	8.7 A	120 mV	JPS130PS15-M †
	24.0 V	4.5 A	5.4 A	200 mV	JPS130PS24-M †
	28.0 V	3.8 A	4.6 A	200 mV	JPS130PS28-M †
	48.0 V	2.3 A	2.7 A	200 mV	JPS130PS48-M †
130 W	5.0 V ⁽¹⁾	10.0 A	15.0 A	50 mV	JPS130PT31-M ⁽²⁾ †
	12.0 V ⁽²⁾	3.0 A	4.1 A	100 mV	
	-12.0 V ⁽²⁾	0.8 A	1.1 A	100 mV	
130 W	5.0 V ⁽¹⁾	10.0 A	15.0 A	50 mV	JPS130PT32-M ⁽²⁾ †
	15.0 V ⁽²⁾	2.5 A	4.1 A	50 mV	
	-15.0 V ⁽²⁾	0.8 A	1.1 A	100 mV	
130 W	5.0 V ⁽¹⁾	2.5 A	4.0 A	50 mV	JPS130PT34-M ⁽²⁾
	24.0 V ⁽²⁾	2.8 A	4.0 A	200 mV	
	12.0 V ⁽²⁾	0.7 A	1.0 A	120 mV	

Notes

- 20% minimum load required on V1 to maintain stated regulation for auxiliary rails.
- Load regulation of auxiliary rails is defined over the range of 60% of rated output $\pm 40\%$.
- Maximum power with 18 CFM of forced air.
- Ripple and noise measured over 15 MHz bandwidth with a 47 μF electrolytic capacitor and 0.47 μF ceramic capacitor.
- Covers available, order part number 'JPS130-M COVER'† or add suffix '-C' to receive the unit with cover fitted.


† Available from Farnell InOne. See pages 236-237 (Farnell series ECM130)

*Available from Newark InOne. See page 238 (Newark series ECM130)

Mechanical Details

All dimensions are in inches (mm)

Tolerance: ± 0.01 (0.3) max.

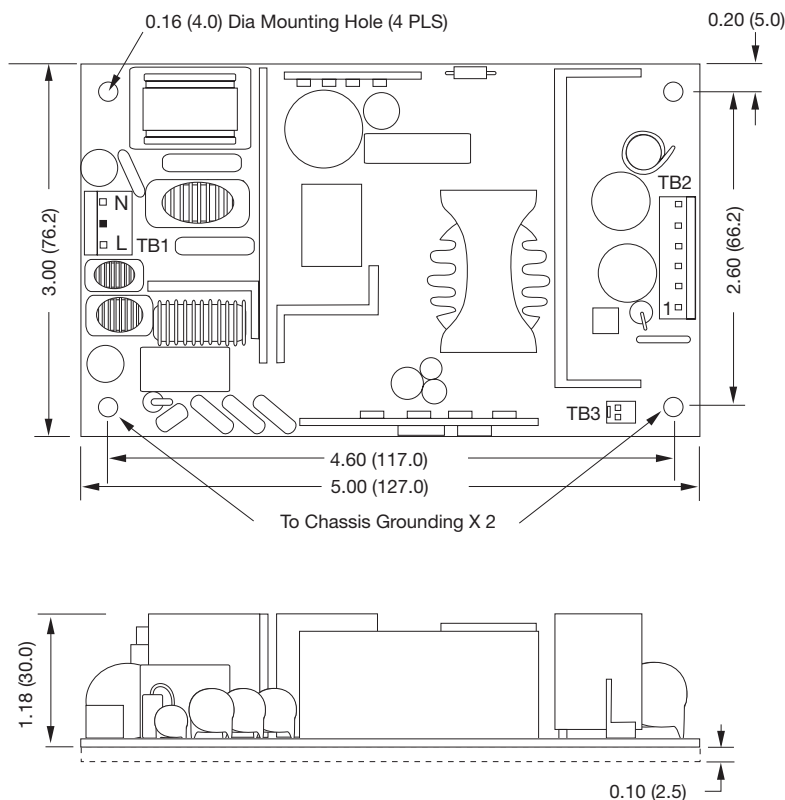

Notes

- Single output model shown, add extra 0.08" (2.0mm) to overall height for triple models.
- AC input connector (TB1): Molex 5277-02A or equivalent.
- DC output connector (TB2): Molex 5273 or equivalent.
- TB3: Molex 5045-02A or equivalent. Single output units - TB3 is remote sense. Triple output units - TB3 is 12 V, 450 mA fan output.

Pin Connections


JPS130/JPS130-M XP

JPS130 PIN CONNECTIONS				
TB2	PS05	PS03, 12, 15, 24, 48	PT31	PT30
1	+V	+V	+5 V	+3.3 V
2	+V	+V	+5 V	+3.3 V
3	+V	+V	+5 V	+3.3 V
4	+V	Return	Return	Return
5	Return	Return	Return	Return
6	Return	Return	Return	Return
7	Return		Return	Return
8	Return		+12 V	+5 V
9			-12 V	+5 V
10				+12 V

JPS130-M PIN CONNECTIONS					
TB2	PS05	PS03, 12, 15, 24, 48	PT31	PT32	PT34
1	Return	Return	-12 V	-15 V	+12 V
2	Return	Return	+12 V	+15 V	+24 V
3	Return	Return	Return	Return	Return
4	Return	+V	Return	Return	Return
5	+V	+V	Return	Return	Return
6	+V	+V	Return	Return	Return
7	+V		+5 V	+5 V	+5 V
8	+V		+5 V	+5 V	+5 V
9			+5 V	+5 V	+5 V


Derating Curves

JPS130

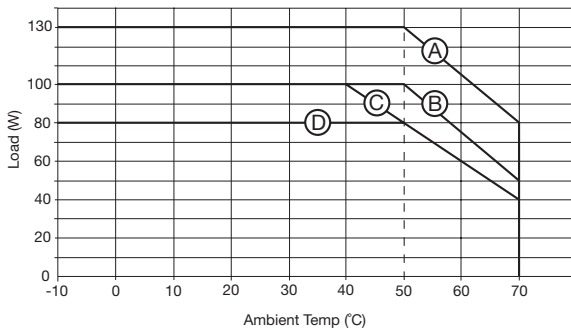

- (A) JPS130 with 18 CFM fan (except JPS130PS03).
- (B) JPS130PS12, PS15, PS24 and PS48 with convection cooling. JPS130PS03 with 18 CFM fan.
- (C) JPS130PS05, PT30, PT31, PT32 and PT34 with convection cooling.
- (D) JPS130PS03 with convection cooling.

JPS130-M

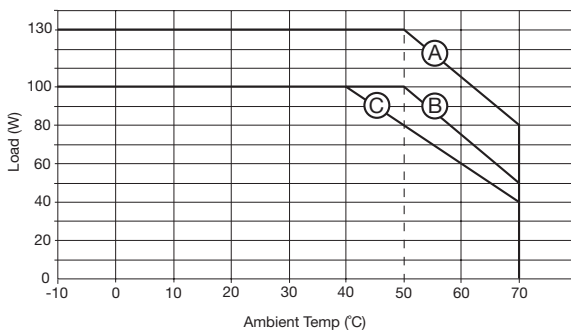

- (A) JPS130-M with 18 CFM fan.
- (B) JPS130PS12-M, PS15-M, PS24-M and PS48-M with convection cooling.
- (C) JPS130PS05-M, PT30-M, PT31-M, PT32-M and PT34-M with convection cooling.