


Lighting Connectors
"Service" Connector



Installation side
1.0 – 2.5 mm² solid
Lighting side
0.5 – 2.5 mm² rig.+flex
400 V/4 kV/2 ①; 24 A
9 – 11 mm / 0.39 in

* VDE KEH N S CCA ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪ ⑫ ⑬ ⑭ ⑮ ⑯ ⑰ ⑱ ⑲ ⑳ ㉑ ㉒ ㉓ ㉔ ㉕ ㉖ ㉗ ㉘ ㉙ ㉚ ㉛ ㉜ ㉝ ㉞ ㉟ ㊱ ㊲ ㊳ ㊴ ㊵ ㊶ ㊷ ㊸ ㊹ ㊺ ㊻ ㊼ ㊽ ㊾ ㊿


Installation side
2 x 1.0 – 2.5 mm² solid
Lighting side
0.5 – 2.5 mm² rig.+flex
400 V/4 kV/2 ①; 24 A
9 – 11 mm / 0.39 in

* VDE KEH N S CCA ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪ ⑫ ⑬ ⑭ ⑮ ⑯ ⑰ ⑱ ⑲ ⑳ ㉑ ㉒ ㉓ ㉔ ㉕ ㉖ ㉗ ㉘ ㉙ ㉚ ㉛ ㉜ ㉝ ㉞ ㉟ ㊱ ㊲ ㊳ ㊴ ㊵ ㊶ ㊷ ㊸ ㊹ ㊺ ㊻ ㊼ ㊽ ㊾ ㊿

0.5 – 2.5 mm² rig. + flex
400 V/4 kV/2 ①
24 A
AWG 20 – 16
300 V, 20 A ②
300 V, ③






9 – 11 mm / 0.39 in

* VDE KEH N S CCA ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪ ⑫ ⑬ ⑭ ⑮ ⑯ ⑰ ⑱ ⑲ ⑳ ㉑ ㉒ ㉓ ㉔ ㉕ ㉖ ㉗ ㉘ ㉙ ㉚ ㉛ ㉜ ㉝ ㉞ ㉟ ㊱ ㊲ ㊳ ㊴ ㊵ ㊶ ㊷ ㊸ ㊹ ㊺ ㊻ ㊼ ㊽ ㊾ ㊿

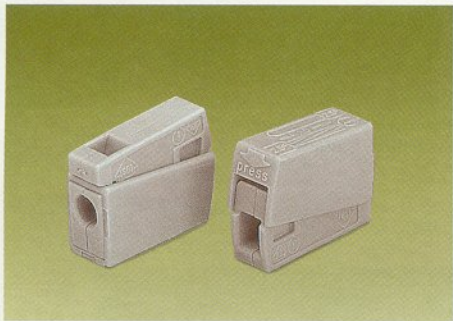

Item-No.	Pack.-unit pcs	Item-No.	Pack.-unit pcs	Item-No.	Pack.-unit pcs
Lighting connectors, standard version, continuous service temperature 105 °C, grey		2-conductor lighting connectors, standard version, continuous service temperature 105 °C, white		"Service" connector grey	
224-101	1000 (10 x 100)	224-112	1000 (10 x 100)	224-201	50
version for increased continuous service temperature of 120 °C, black		version for increased continuous service temperature of 120 °C, black			
224-104	100	224-114	100		

Dimensions (in mm) ① in grounded (earthed) supply systems 400 V = rated voltage 4 kV = rated surge voltage 2 = pollution degree (see also section 10)

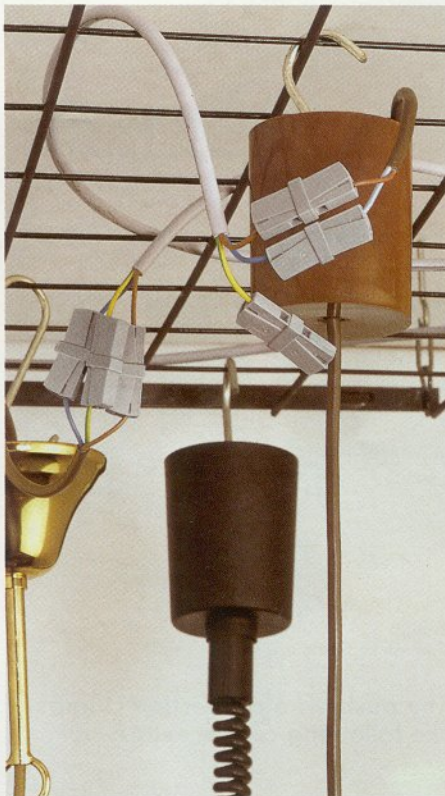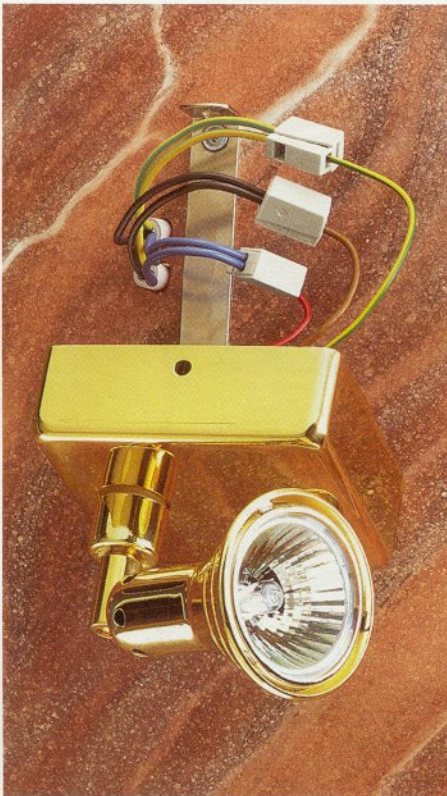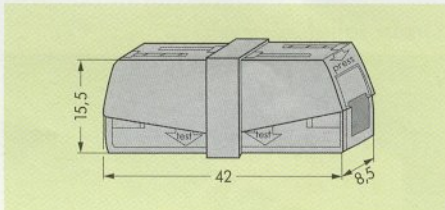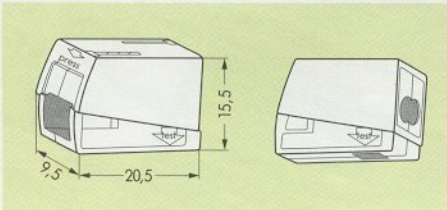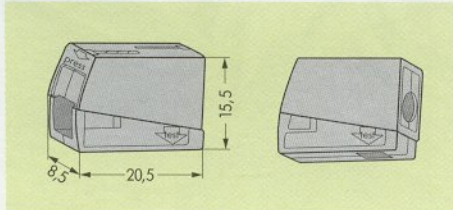

* For further approvals with corresponding ratings see pages 10.3 ff.