

Workplace System Luminaire



CERTO - CER 236


connected load
fitted with

work equipment
mains lead
luminaire body
material
surface
luminaire base
form
weight (net)
fastening
technology
usage
glare-free
class of protection
colour luminaire body
article no.


230 V/ 50 Hz
2 x compact fluorescent lamp TC-L 36 W
neutral white 4000 K
conventional ballast
approx. 2.9 m; shock-proof plug

sectional aluminium
anodized

I
approx. 4,4 kg
screws ; distance variable
switchable
switch
plastic grid
I
aluminium coloured anodized
CER00100A

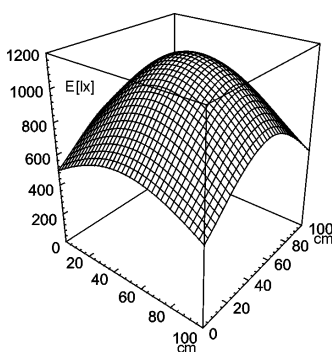

Emin: 497 lx
Em: 837 lx
Emax: 1158 lx

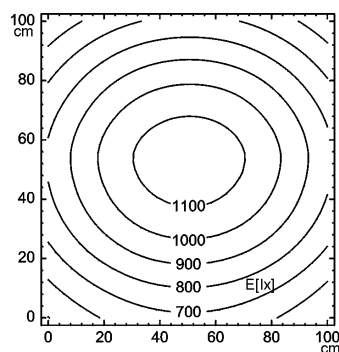

measuring conditions: d=100cm

