



MICRO SWITCH
 A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY
 BIRMGHAM, ILLINOIS
 FED. MFR. CODE 91929


SWITCH - BASIC

SKETCH 15259
 ISSUE 1

ISEI-T
 DRAWING NUMBER
 X 2
 ISSUE X 4

REVISIONS
 A CO-13455
 23 MAR 59
 B CO-18028
 14 MAY 63
 C CO-34213
 J A L
 24 SEPT 74

FO-50378
 DRAWN
 R. E. R. 1 AUG 57
 CHECK JRH 12 AUG 57
 CHECK CNT 2 AUG 57

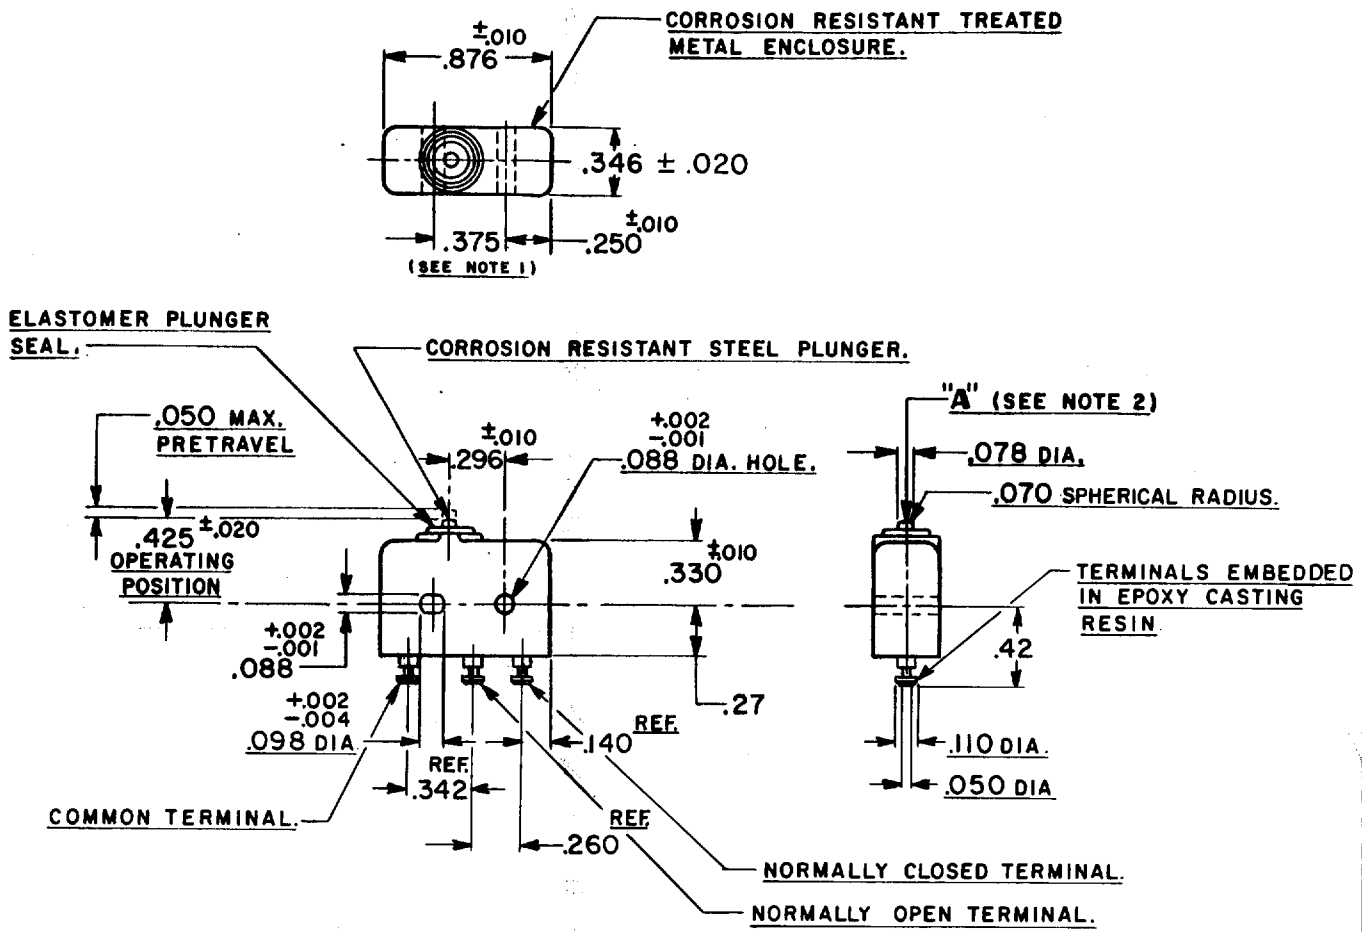

NOTE -
 1-MOUNTING HOLES WILL ACCEPT .087 MAX. DIA. PINS OR SCREWS ON $.375 \pm .002$ CENTERS.
 2-ACTUATION IN LINE WITH ARROW "A" IS RECOMMENDED.

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA	SCALE - FULL
OPERATING FORCE - - - - - 5 - 17 OZ.	CONTACT ARRANGEMENT S. P. D. T.	DO NOT SCALE PRINT
RELEASE FORCE - - - - - 4 OZ. MIN.	250 VAC - - - - - 5 AMP 30 VOLTS DC RATING INDUCTIVE - - - - - SEA LEVEL - 3 AMP 50,000 FT. - 2.5 AMP RESISTIVE - - - - - SEA LEVEL - 5 AMP 50,000 FT. - 5 AMP (A) MAXIMUM INRUSH - - - - - 24 AMP	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
RELEASE TRAVEL - - - - - .004 MIN.		TOLERANCES ARE: ONE PLACE (.0) $\pm .030$ TWO PLACE (.00) $\pm .015$ THREE PLACE (.000) $\pm .005$ ANGLES \pm
DIFFERENTIAL TRAVEL - - - - - .004 MAX		WEIGHT .26 OZ MAX (B)
OVERTRAVEL - - - - - .003 MIN.		