

RER-5-M lens for Luxeon Rebel LEDs





- Lens material optical grade PMMA with high UV and temperature resistance (105°C/220°F)
- High optical efficiency, >85%
- No lens holder. Snap-fitting of the lens to customer's heat sink. Please contact us for detailed mounting information
- Diameter 35.5 mm (MR11)

LENS TYPES

NAME	ORDERING CODE	FWHM Angle
RER-5 Medium Low	C10472_RER-5-M-Low	±12°

MEASUREMENT DATA & PHOTOGRAPHS

RER-5-M

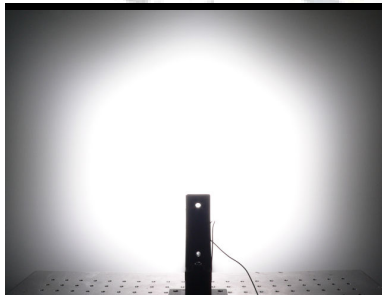


PACKAGING

Lenses are packed in carton boxes of 500 pieces in each box.

© Ledil Oy – PRELIMINARY - Subject to change without prior notice

DRAWING

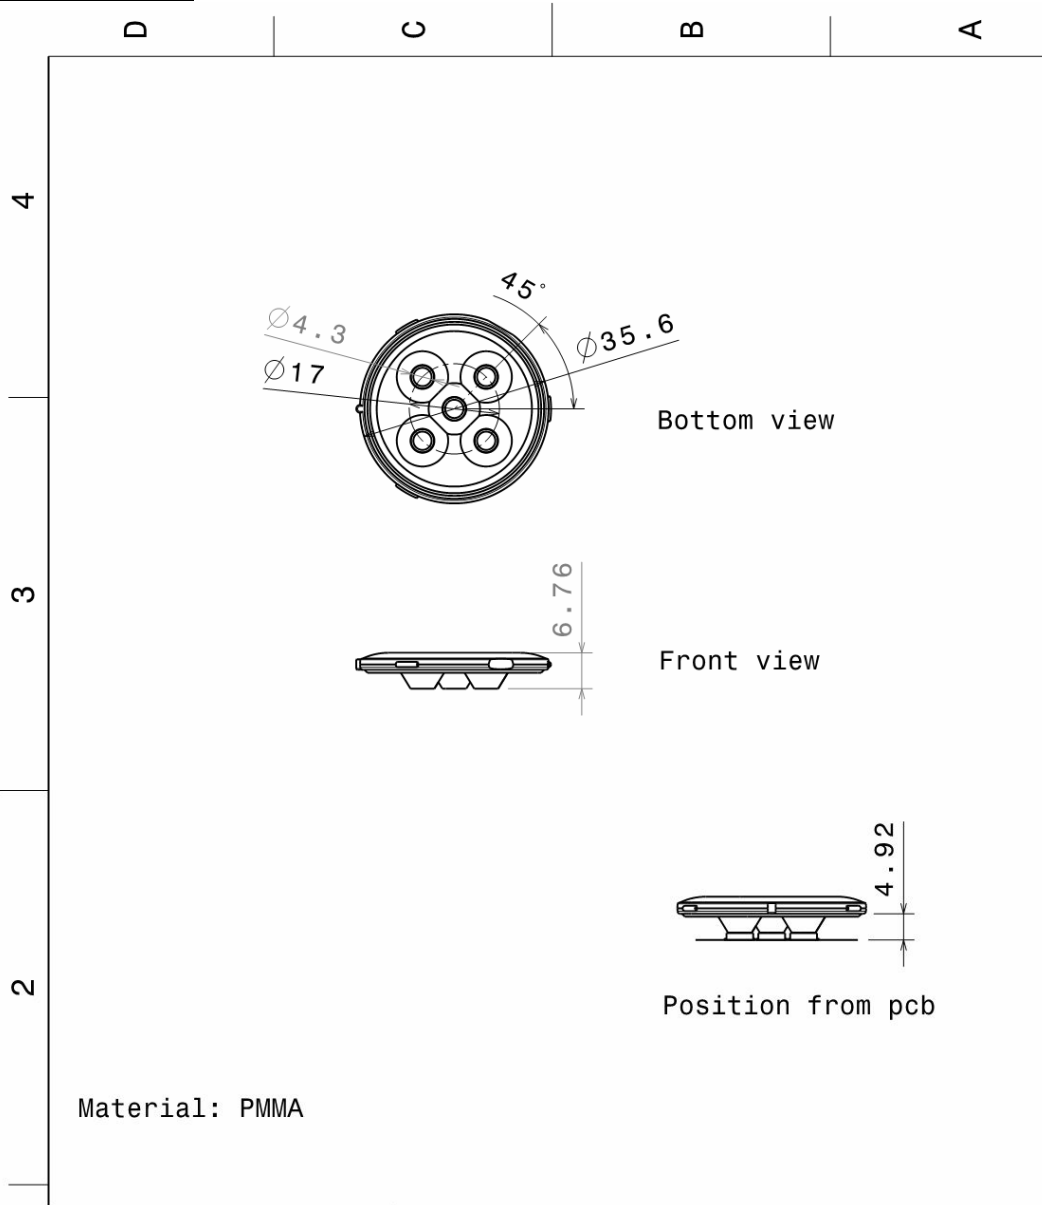

This drawing is our property. It can't be reproduced or communicated without our written agreement.		Ledil Oy Tehdaskatu 13 FIN-24100 SALO Finland	
DRAWING TITLE		Datasheet NIS083-5-M Lens	
DRAWN BY pv	DATE 10.12.2008	SIZE A4	DRAWING NUMBER 10472
CHECKED BY TK	DATE 31.12.2007	SCALE 1:1	REV 0.1
DESIGNED BY HH	DATE 31.12.2007	WEIGHT (g)	SHEET 1/1

© Ledil Oy - PRELIMINARY - Subject to change without prior notice