


**ITO-220AB**

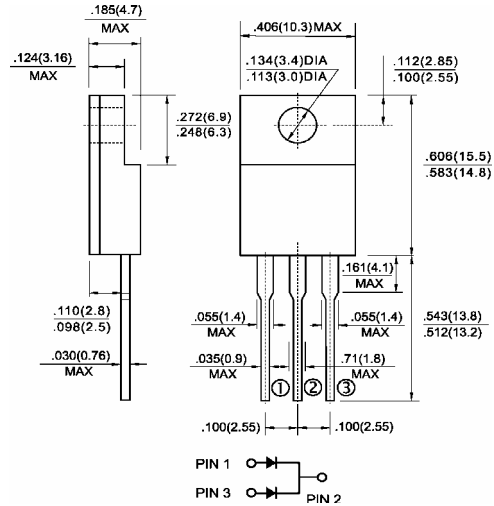

Dimensions in inches and (millimeters)

**Features**

- ✧ Plastic material used carries Underwriters Laboratory Classifications 94V-0
- ✧ Metal silicon junction, majority carrier conduction
- ✧ Low power loss, high efficiency
- ✧ High current capability, low forward voltage drop
- ✧ High surge capability
- ✧ For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications
- ✧ Guardring for overvoltage protection
- ✧ High temperature soldering guaranteed: 260°C/10 seconds, 0.25" (6.35mm) from case

**Mechanical Data**

- ✧ Cases: ITO-220AB molded plastic
- ✧ Terminals: Pure tin plated, lead free. solderable per MIL-STD-750, Method 2026
- ✧ Polarity: As marked
- ✧ Mounting position: Any
- ✧ Mounting torque: 5 in. - lbs. max
- ✧ Weight: 0.08 ounce, 2.24 grams

**Maximum Ratings and Electrical Characteristics**

Rating at 25 °C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

| Type Number   | Symbol          | MBRF 10H100CT                | MBRF 10H150CT                | MBRF 10H200CT | Units                     |
|---|-----------------|------------------------------|------------------------------|---------------|---------------------------|
| Maximum Recurrent Peak Reverse Voltage  | $V_{RRM}$       | 100                          | 150                          | 200           | V                         |
| Maximum RMS Voltage   | $V_{RMS}$       | 70                           | 105                          | 140           | V                         |
| Maximum DC Blocking Voltage   | $V_{DC}$        | 100                          | 150                          | 200           | V                         |
| Maximum Average Forward Rectified Current at $T_c=125^\circ\text{C}$  | $I_{(AV)}$      | 10                           |                              |               | A                         |
| Peak Repetitive Forward Current (Rated $V_R$ , Square Wave, 20KHz) at $T_c=133^\circ\text{C}$   | $I_{FRM}$       | 10                           |                              |               | A                         |
| Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method )   | $I_{FSM}$       | 120                          |                              |               | A                         |
| Peak Repetitive Reverse Surge Current (Note 1)  | $I_{RRM}$       | 1.0                          |                              | 0.5           | A                         |
| Maximum Instantaneous Forward Voltage at (Note 2)<br>$I_F=5\text{A}, T_c=25^\circ\text{C}$<br>$I_F=5\text{A}, T_c=125^\circ\text{C}$<br>$I_F=10\text{A}, T_c=25^\circ\text{C}$<br>$I_F=10\text{A}, T_c=125^\circ\text{C}$ | $V_F$           | 0.85<br>0.75<br>0.95<br>0.85 | 0.88<br>0.75<br>0.97<br>0.85 |               | V                         |
| Maximum Instantaneous Reverse Current at Rated DC Blocking Voltage @ $T_c=25^\circ\text{C}$<br>@ $T_c=125^\circ\text{C}$  | $I_R$           | 5.0<br>1.0                   |                              |               | $\mu\text{A}$<br>mA       |
| Voltage Rate of Change, (Rated $V_R$ )  | $dV/dt$         | 10,000                       |                              |               | V/ $\mu\text{s}$          |
| RMS Isolation Voltage ( $t=1.0$ second, R.H. $\leq 30\%$ , $T_A=25^\circ\text{C}$ ) (Note 4)<br>(Note 5)<br>(Note 6)  | $V_{ISO}$       | 4500<br>3500<br>1500         |                              |               | V                         |
| Typical Thermal Resistance Per Leg (Note3)  | $R_{\theta JC}$ | 3.5                          |                              |               | $^\circ\text{C}/\text{W}$ |
| Operating Junction Temperature Range  | $T_J$           | -65 to +175                  |                              |               | $^\circ\text{C}$          |
| Storage Temperature Range   | $T_{STG}$       | -65 to +175                  |                              |               | $^\circ\text{C}$          |

- Notes: 1. 2.0 us Pulse Width,  $f=1.0$  KHz 2. Pulse Test: 300us Pulse Width, 1% Duty Cycle  
3. Thermal Resistance from Junction to Case Per Leg.  
4. Clip Mounting (on case), where lead does not overlap heatsink with 0.110" offset.  
5. Clip mounting (on case), where leads do overlap heatsink.  
6. Screw mounting with 4-40 screw, where washer diameter is  $\leq 4.9$  mm (0.19")

## RATINGS AND CHARACTERISTIC CURVES (MBRF10H100CT - MBRF10H200CT)

FIG.1- FORWARD CURRENT DERATING CURVE

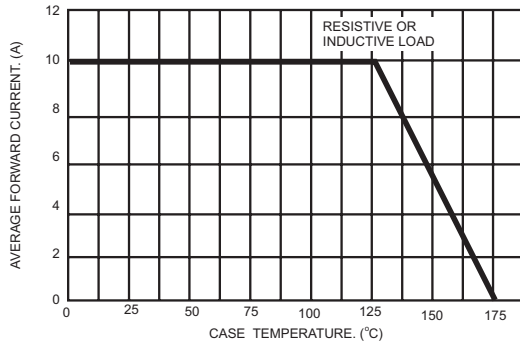


FIG.2- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

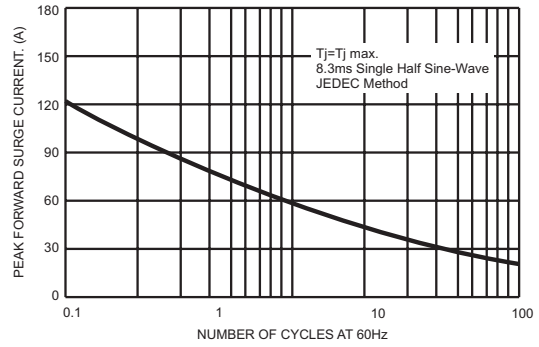


FIG.3- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

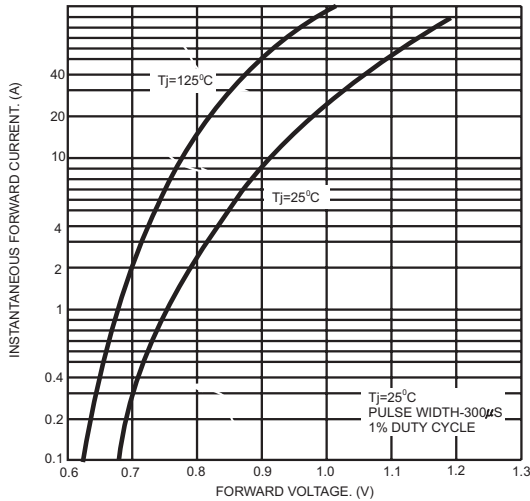


FIG.4- TYPICAL REVERSE CHARACTERISTICS

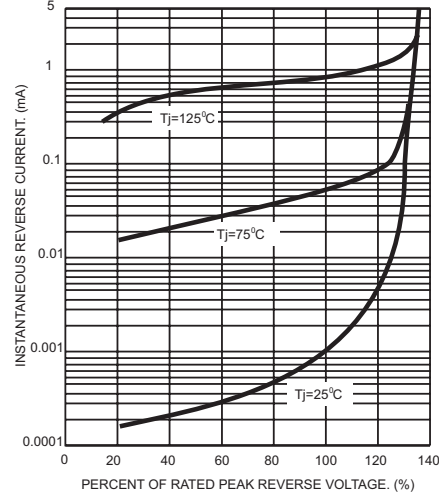


FIG.5- TYPICAL JUNCTION CAPACITANCE

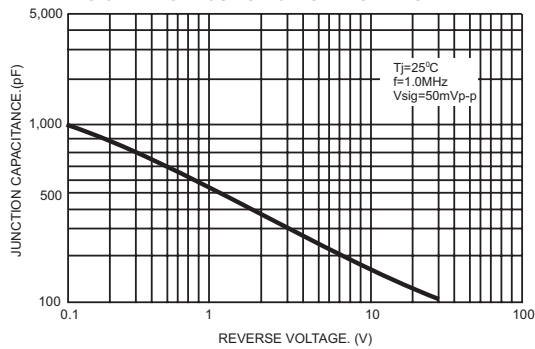


FIG.6- TYPICAL TRANSIENT THERMAL CHARACTERISTICS PER LEG

