
ITS-P-06006C



## **N.FL Series**

## Low Profile, Small Mounting Space Coaxial Connectors

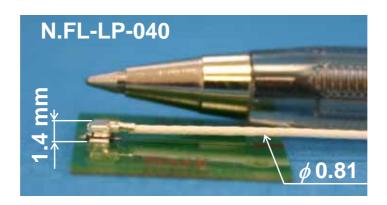

## **♦** Features

- 1. Low Profile: 1.4mm (1.5 mm Max.) mating height
- 2. The World Small Class Coaxial Connector
- 3. High Frequency Performance (V.S.W.R): 1.3 Max. [DC to 6GHz]
- 4. Extra Fine Cable:  $\phi$  0.81 mm outer diameter
- 5. User Friendly: Click feeling when fully mated
- 6. Satisfies RoHS requirements

## ♦ N.FL Specifications

|  | N.FL  | HRS existing U.FL-LP(V) |
|--|---|-------------------------|
| Mating Height<br>(excluding the solder<br>paste thickness) | 1.4 [1.5 Max.]                                      | 1.9<br>[2.0Max.]        |
| High Frequency<br>Performance<br>(V.S.W.R.)                | 1.3 Max [DC to 6 GHz]                               |                         |
| Cable Size   | $\phi$ 0.81 coaxial cable                           |                         |
| Occupied<br>Mounting Surface                               | 7.7 F. S.       |                         |
|  | N.FL is mountable on the PCB layout of U.FL series. |                         |

**♦** Application Example Mobile phone, PDA, Bluetooth, Wireless LAN, and other wireless communication devices.