

Customer Information Sheet

DRAWING No.: M22-60230XX

SHEET 2 OF 2


IF IN DOUBT - ASK

(C)

NOT TO SCALE

THIRD ANGLE PROJECTION

ALL DIMENSIONS IN mm

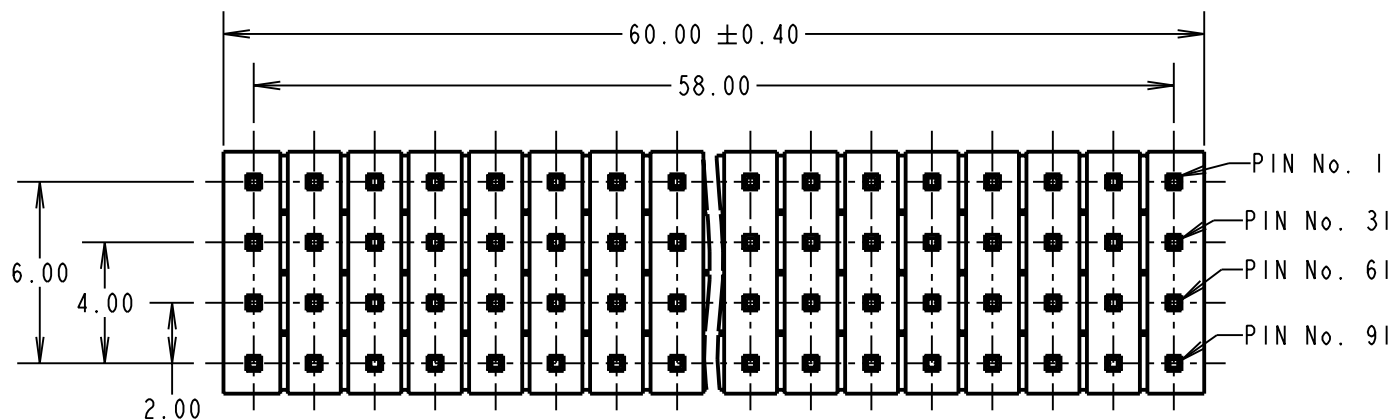

SPECIFICATION:

MATERIALS:

MOULDING = NYLON 6T UL94V-0 BLACK

CONTACTS = BRASS

FINISH (OVER NICKEL):

GOLD ON CONTACT AREA, 100% TIN ON TAILS

ELECTRICAL:

CONTACT RESISTANCE = 20 MILLIOHMS MAX.

INSULATION RESISTANCE = 5000 MEGOHMS MIN.

CURRENT RATING = 1A MAX.

VOLTAGE RATING = 250V AC


VOLTAGE PROOF = 800V AC FOR 1 MINUTE

ENVIRONMENTAL:

TEMPERATURE RANGE = -55° TO +105°C



PACKING:

TUBE



NOTES:

1. ALL TOLERANCES ARE ± 0.20 UNLESS OTHERWISE STATED.

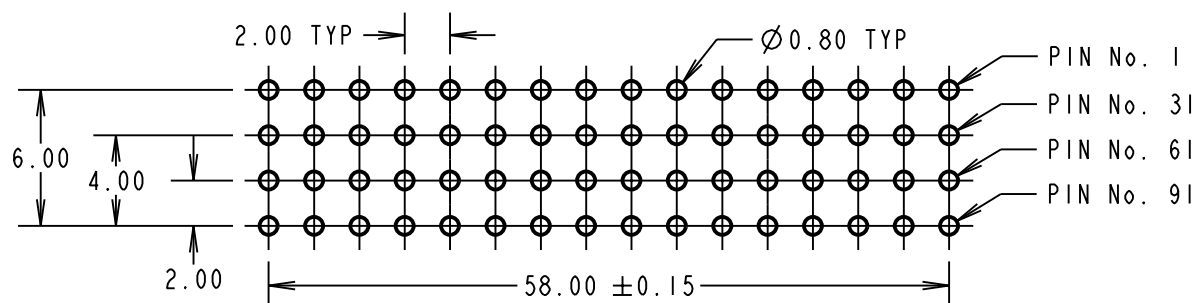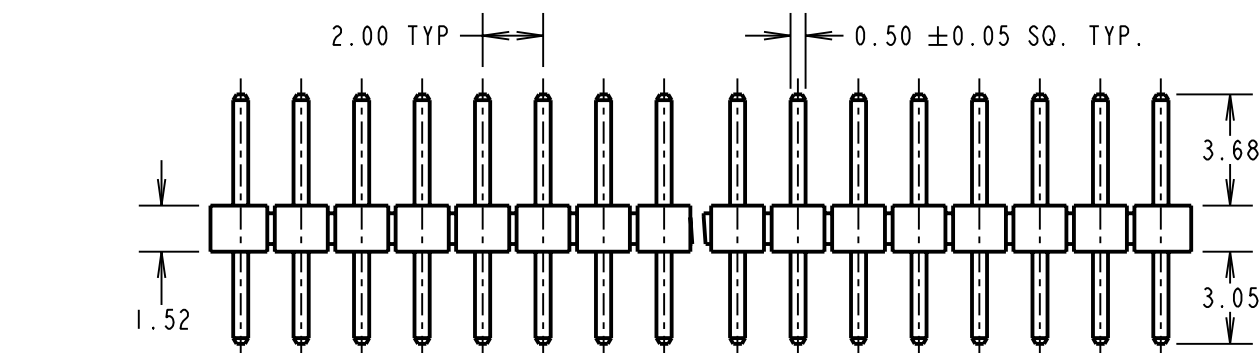

ORDER CODE:

M22-6023042

No. OF WAYS PER ROW
30

FINISH: 42 = SELECTIVE GOLD + 100% TIN

CP	6	14.12.09	10582
NAME	ISS.	DATE	C/NOTE
APPROVED: C.PENROSE			
CHECKED: R.ADDE			
DRAWN: D.BECK			
CUSTOMER REF.:			
ASSEMBLY DRG:			

HARWIN

HARWIN USA
TEL: 603 893 5376
FAX: 603 893 5396
mis@harwin.com

HARWIN Europe (UK)
TEL: 023 9231 4545
FAX: 023 9231 4590
mis@harwin.co.uk

HARWIN Asia
TEL: +65 6 779 4909
FAX: +65 6 779 3868
mis@harwin.com.sg

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

TOLERANCES

X = $\pm 1mm$
X.X = $\pm 0.25mm$
X.XX = $\pm 0.10mm$
X.XXX = $\pm 0.01mm$
ANGLES = $\pm 5^\circ$
UNLESS STATED

MATERIAL:

SEE ABOVE

FINISH: SEE ABOVE

S/AREA: mm²

TITLE:

PCI04 PLUS
POST HEADER

DRAWING NUMBER:

M22-60230XX

SHT
2 OF 2