



# F3PAM

## Technical Specification

<b>Standard Range</b>	0/2A, 0/4A, 0/5A, 0/6A, 0/8A, 0/10A, 0/12A
	0/15A 0/20A, 0/25A, 0/30A, 0/15V, 0/30V
<b>Calibration Accuracy</b>	±8% of f.s.d
<b>Movement</b>	Polarized moving iron
<b>Temperature Range</b>	-20°C to +40°C
<b>Terminations</b>	Flying leads as standard. Other terminations
	available on request
<b>Fixing</b>	Snap into panel (or U clip type F3PM)
<b>Options</b>	Black or white dial

## Dimensions

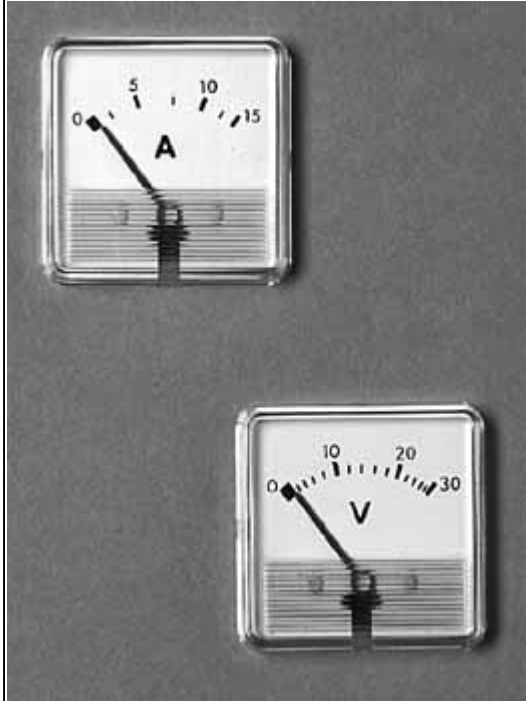

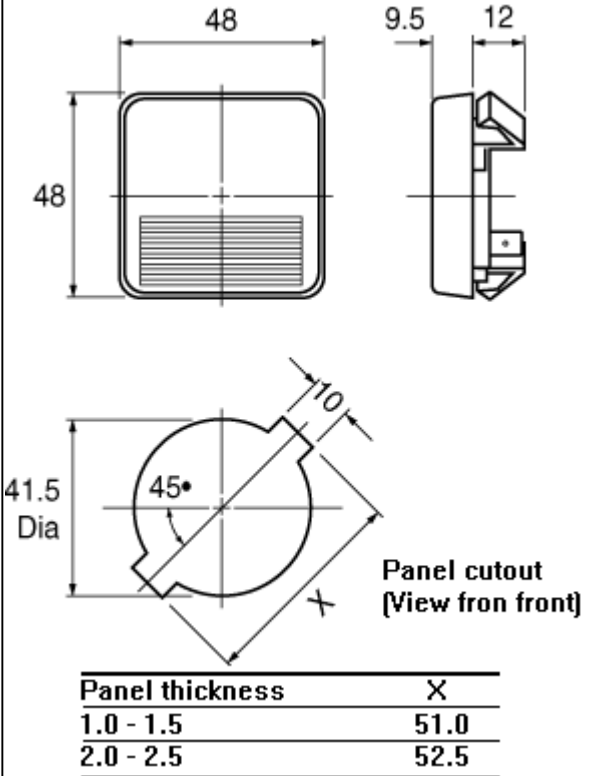

Panel thickness	X
1.0 - 1.5	51.0
2.0 - 2.5	52.5



**Sales Enquiry**



**Home**



**Main Battery Charge Meter Page**

Contact sales: [sales@hobut.co.uk](mailto:sales@hobut.co.uk)