


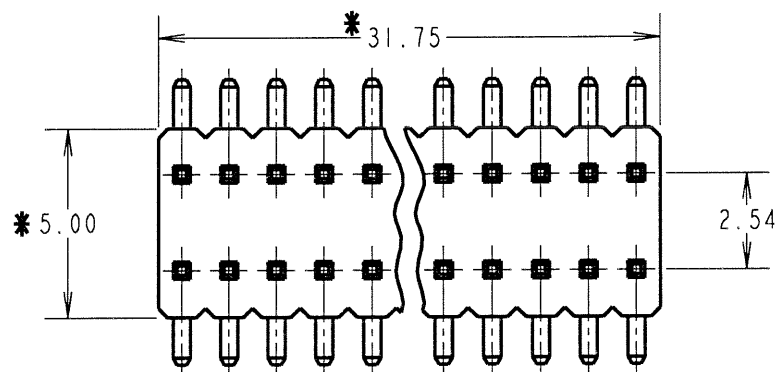

SPECIFICATIONS:

MATERIAL:

MOULDING = NYLON 6T, UL94V-0, BLACK
CONTACT = BRASS

FINISH:

CONTACT = GOLD

ELECTRICAL:

CURRENT RATING = 1A

CONTACT RESISTANCE = 20mΩ MAX

INSULATION RESISTANCE = 5000MΩ MIN

DIELECTRIC STRENGTH = 500V AC FOR 1 MINUTE




ENVIRONMENTAL:

TEMPERATURE RANGE = -40°C TO +105°C

PACKING: BAG

FOR COMPLETE SPECIFICATION SEE

COMPONENT SPECIFICATION C029XX (LATEST ISSUE)

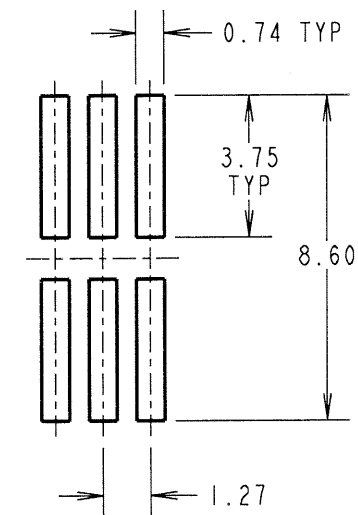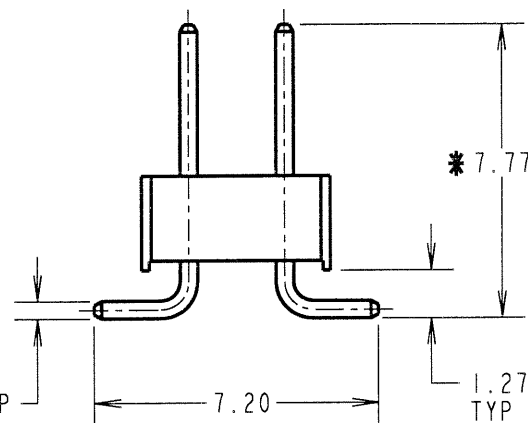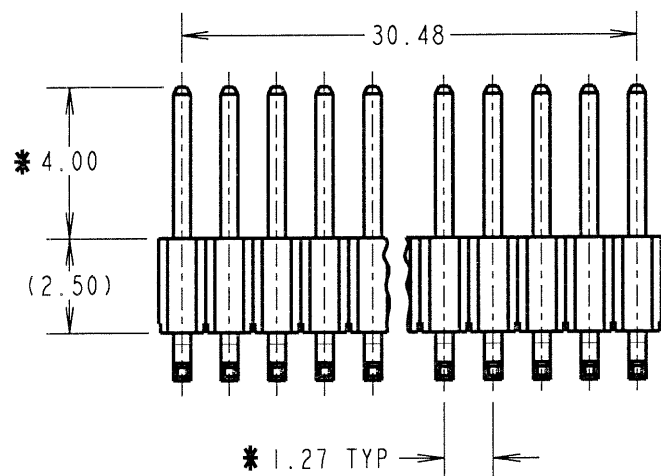

RECOMMENDED
PAD LAYOUT
(±0.05mm)

NOTES:

1. ALL DIMENSIONS AND NOTES MARKED * ARE CRITICAL AND MUST BE CHECKED IN ACCORDANCE WITH QUALITY INSTRUCTION Q1-02.
2. MAXIMUM PERMISSIBLE OUT OF SQUARE OF PIN TO MOULDING TO BE 0.15mm IN ANY DIRECTION.
3. CONTACT LEG VARIATION ON COMPLETE ASSEMBLY NOT TO EXCEED 0.20mm.
4. ALL TOLERANCES ARE ±0.20 UNLESS OTHERWISE STATED.
- * 5. ALL PRODUCT TO HAVE 'LEAD FREE' LABELLING ON ALL PACKAGING.

JMB	1	17.11.05	----
NAME	ISS.	DATE	C/NOTE
APPROVED:			
CHECKED:			
DRAWN:	JM BROOKES		
CUSTOMER REF.:			
ASSEMBLY DRG:			

HARWIN

HARWIN USA
TEL: 603 893 5376
FAX: 603 893 5396
mis@harwin.com

HARWIN Europe (UK)
TEL: 023 9231 4545
FAX: 023 9231 4590
mis@harwin.co.uk

HARWIN Asia
TEL: +65 6 779 4909
FAX: +65 6 779 3868
mis@harwin.com.sg

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

TOLERANCES

X. = ±1mm
X.X = ±0.25mm
X.XX = ±0.10mm
X.XXX = ±0.01mm

ANGLES = ±5°

UNLESS STATED

MATERIAL:

SEE ABOVE

FINISH:

SEE ABOVE

S/AREA:

mm²

TITLE:

1.27x2.54mm PITCH DIL SURFACE
MOUNT PIN HEADER (25 WAY)

DRAWING NUMBER:

M52-040000S2545

SHT

1 OF 1