




927-790 to 927-806

Bussmann

**BS88, IEC269 Industrial HRC Fuse Links**  
**Offset Bolted Tags 550V ac and Motor Rated 415V**


**OSD**

**Time-Current Characteristic Curves**

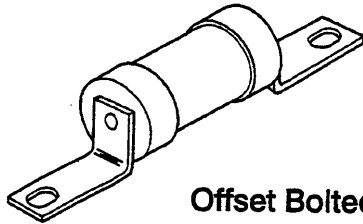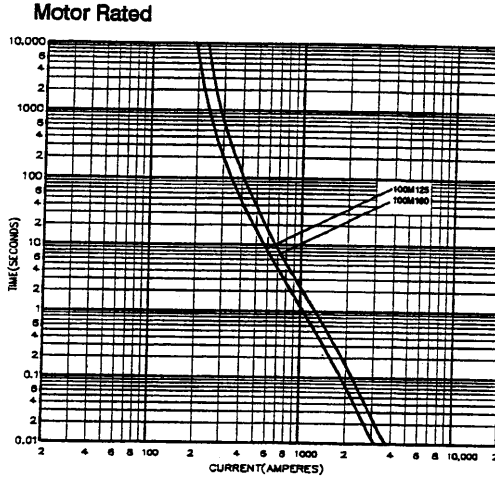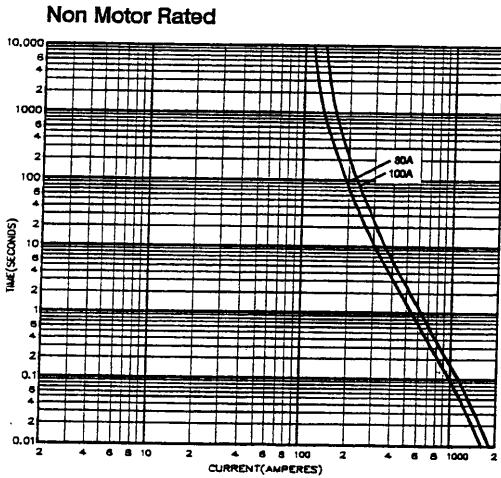

**Offset Bolted Tag**

**Dimensional Data**

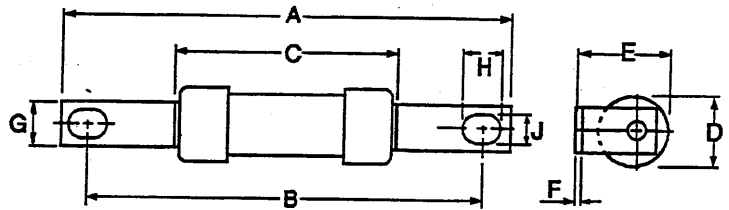

Catalog' Number	I <sup>2</sup> t (Amps <sup>2</sup> Seconds)		Nom. Watts Loss	Rated Voltage	Dimensions (Inches/mm)									
	Amp Ratings	Pre-Arcing			Total at 415V	A	B	C	D	E	F	G	H	J
OSD80	80	13,000	35000	7.2	550 ac	3.74 95.0	2.87 73.0	2.17 54.5	0.84	0.89	0.05	0.5	0.31	0.22
OSD100	100	25,000	76,500	8.5					21.0	22.5				
OSD100M125	100M125	57,000	150,000	6.5	415 ac	95.0	73.0	54.5	1.02	.97	1.22	12.7	8.0	5.5
OSD100M160	100M160	72,500	190,000	5					26.0	25.7				

Packaging - 20 per carton

This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.



**Bussmann Division**  
**Cooper (U.K.) Ltd**  
 Burton-on-the-Wolds  
 Leicestershire, LE12 5TH  
 United Kingdom  
 Tel: (44) (0)1509 88 27 37  
 Fax: (44) (0)1509 88 27 86

Head Office  
 St. Louis, MO, U.S.A. Tel: (314) 527-3877 Fax: (800) 544-2570 International Fax: (314) 527-1445



Bussmann Information Fax (00 1) 314 527 1450