

SPECIFICATIONS

ELECTRICAL

RESISTANCE RANGE (OHMS) -----  
 RESISTANCE TOLERANCE -----  
 LINEARITY, INDEPENDENT -----  
 RESOLUTION -----  
 ELECTRICAL STROKE -----  
 OUTPUT SMOOTHNESS -----  
 POWER RATING -----  
 INSULATION RESISTANCE -----  
 DIELECTRIC STRENGTH -----  
 FRICTION -----

MECHANICAL

MECHANICAL STROKE -----  
 STOP STRENGTH -----  
 LIFE EXPECTANCY -----  
 WEIGHT APPROX. -----  
 MARKINGS -----  
 SPRING RETURN -----  
 FORCE WHEN APPLICABLE -----

ENVIRONMENTAL

SHOCK -----  
 VIBRATION -----  
 OPERATING TEMPERATURE RANGE -----  
 TEMPERATURE COEFFICIENT -----

OPTIONS

RESISTANCE TOLERANCE -----  
 LINEARITY, PRECISION -----  
 SPECIAL MACHINED SHAFT -----



TOLERANCES

XX = +/- .010" FRACT. = +/- 1%  
 XXX = +/- .005" ANGLES = +/- 1'

ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT

PR-10

FORCE

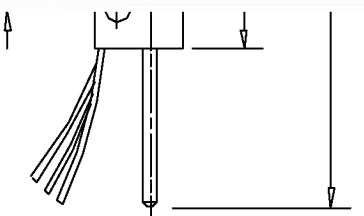

PLAIN

THREADED  
 2-56 UNC-2A

CHAMFERED

SPRING RETURN  
 (INTERNAL)

CARLSBAD  
 MS CALIFORNIA

8-10