


P.C.B. LAYOUT

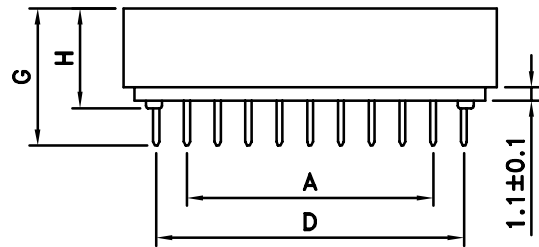

6601-XX(G)-PPS/PBT

PPS=(BROWN)
 GOLD PLATE
 20,28,32,44,52,68,84
 SERIES NO.

MATERIALS:
 CONTACT COPPER ALLOY TIN PLATED.
 HOUSING (A) RYTON(R-4)PPS COMPOUNDS BROWN
 (B) PBT UL94V-0 BLACK
 POLYPHENYLENE SULFIDE,UL94V-0
 ELECTRICAL CHARACTERISTICS:
 CURRENT RATING 1A MIN.
 WIRHSTANDING VOLTAGE .. AC 500V R.M.S.
 INSULATION RESISTANCE .. 1000M OHM UP.
 CONTACT RESISTANCE 30 MILLOHMS MAX
 OPERATING TEMPERATURE .. CONTINUOUS -55°C ~ +110°C
 GOLD PLATE: 1.5~2.0μ"

CONTACTS	A	B	C	D	E	F	G	H	I	J
20	5.08	15.56	17.06	10.16	9.30	9.30	11.30	8.10	15.56	5.08
28	7.62	18.10	20.70	12.70	11.90	11.90	11.30	8.10	18.10	7.62
32	7.62	18.10	22.80	12.70	11.90	14.00	11.30	8.10	20.64	10.16
44	12.70	23.18	27.80	17.78	16.76	16.76	11.30	8.10	23.18	12.70
52	15.24	25.72	31.50	20.32	19.12	19.12	11.30	8.10	25.72	15.24
68	20.32	30.80	39.00	25.40	25.25	25.25	11.30	8.10	30.80	20.32
84	25.40	35.88	46.15	30.48	29.28	29.28	11.30	8.10	35.88	25.40

E			
D			
C			
B			
A	12-08-1998		Jerry Chen
REV	DATE	FILE	BY

DRAWN: Jerry Chen	GENERAL TOLERANCE: .X=±0.2 .XX=±0.15
CHECKED:	
APPROVAL:	UNIT: MM
	SCALE:
	SHEET: 1 / 1
	PROJECTION:

DESCRIPTION: PLCC SOCKET	SIZE A4
PART NO: 6601-XX(G)-PPS/PBT	