


PTFE Insulated Equipment Wire to BS 3G 210

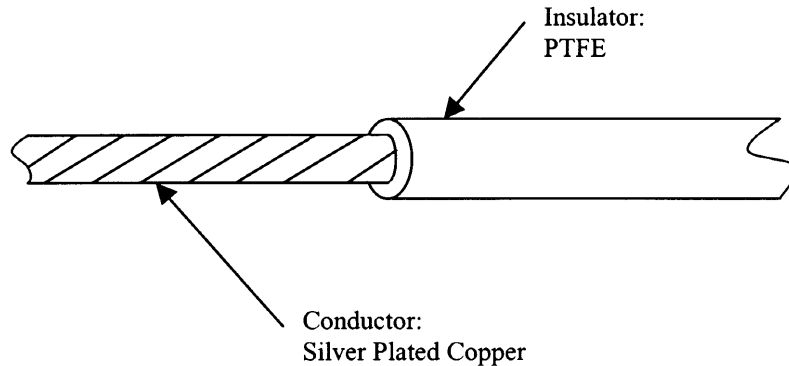

Unscreened Type A

The sizes available are as follows:

Size	No. of Strands	Nominal diameter of strands mm	Nom. diameter of conductor mm	Nom. Insulation R.T. mm	Overall diameter mm		Max Resistance at 20°C /km	Max Wt. Kg/km
					Min.	Max		
30	1	0.250	0.250	0.15	0.45	0.60	377.0	0.96
28	1	0.320	0.320	0.15	0.52	0.67	229.0	1.32
26	1	0.400	0.400	0.15	0.60	0.75	146.0	1.83
32	7	0.080	0.240	0.15	0.44	0.59	558.0	0.84
30	7	0.100	0.300	0.15	0.50	0.65	353.0	1.10
28	7	0.120	0.360	0.15	0.56	0.71	244.0	1.40
26	7	0.150	0.450	0.15	0.65	0.80	159.0	1.96
24	7	0.200	0.600	0.15	0.80	0.95	88.30	3.04
26	19	0.100	0.500	0.15	0.70	0.85	130.0	2.26
24	19	0.120	0.600	0.15	0.80	0.95	89.8	2.99
22	19	0.150	0.750	0.15	0.95	1.10	58.6	4.41
20	19	0.200	1.000	0.15	1.20	1.35	32.5	7.19

Cable Characteristics

Temperature rating : 190°C

Voltage rating : 300 Volts.

This drawing is the exclusive property of Brand-Rex Limited and must not be copied or reproduced in any way whatsoever without the express consent in writing of Brand-Rex Limited. The drawing is to be used only for the purpose for which it is supplied and must be returned on demand. The contents of the drawing must moreover be treated as strictly confidential and must not be disclosed to any third party without the express consent in writing of Brand-Rex Limited.
An Agency Company of BICC plc.

Brand-Rex

Leigh, Lancashire WN7 4HB, England
Telephone (01942) 260387 Fax (01942) 607593

Part No : 31E101***

Design Ref : HPCS 9001

Drawing No : Leigh-0046

Issue No : 1

Date : 11/02/00

Issued By : H PARRY