

JCM Series



- High Power Density
- 2:1 Input Range
- Operating Temperature -40 °C to +100 °C
- Single & Dual Outputs
- 1600 VDC Isolation
- High Efficiency - up to 89%
- 3 Year Warranty

Specification

Input

Input Voltage Range	<ul style="list-style-type: none"> • 12 V (9-18 VDC) • 24 V (18-36 VDC) • 48 V (36-75 VDC)
Input Current	<ul style="list-style-type: none"> • See table
Input Filter	<ul style="list-style-type: none"> • Pi network
Input Reflected Ripple Current	<ul style="list-style-type: none"> • 20 mA pk-pk through 12 μH inductor and 47 μF capacitor, 5 Hz to 20 MHz
Input Surge	<ul style="list-style-type: none"> • 12 V models: 36 VDC for 100 ms • 24 V models: 50 VDC for 100 ms • 48 V models: 100 VDC for 100 ms

Output

Output Voltage	<ul style="list-style-type: none"> • See table
Output Trim	<ul style="list-style-type: none"> • \pm10% max on single output
Minimum Load	<ul style="list-style-type: none"> • No minimum load required
Initial Set Accuracy	<ul style="list-style-type: none"> • \pm1% max
Start Up Delay	<ul style="list-style-type: none"> • 20 ms typical
Line Regulation	<ul style="list-style-type: none"> • \pm0.2% max
Load Regulation	<ul style="list-style-type: none"> • \pm0.5% max single, \pm1.0% max dual
Cross Regulation	<ul style="list-style-type: none"> • \pm5% on dual output models, see note 2
Transient Response	<ul style="list-style-type: none"> • <3% max deviation, recovery to within 1% in 250 μs for a 25% load change
Ripple & Noise	<ul style="list-style-type: none"> • 100 mV pk-pk, 20 MHz bandwidth, see note 3
Overvoltage Protection	<ul style="list-style-type: none"> • 3.3 V models: 3.9 V typical • 5 V models: 6.2 V typical • 12 V models: 15 V typical • 15 V models: 18 V typical • \pm5 V models: \pm6.2 V typical • \pm12 V models: \pm15 V typical • \pm15 V models: \pm18 V typical
Overload Protection	<ul style="list-style-type: none"> • 150% of full load typical
Short Circuit Protection	<ul style="list-style-type: none"> • Trip & restart (hiccup) with auto recovery
Maximum Capacitive Load	<ul style="list-style-type: none"> • See table
Temperature Coefficient	<ul style="list-style-type: none"> • \pm0.02/°C max
Remote On/Off	<ul style="list-style-type: none"> • On >3.0 VDC or open circuit • Off <1.2 VDC or short circuit pins 2 & 3

General

Efficiency	<ul style="list-style-type: none"> • See table
Isolation	<ul style="list-style-type: none"> • 1600 VDC Input to Output • 1600 VDC Input to Case • 1600 VDC Output to Case
Isolation Capacitance	<ul style="list-style-type: none"> • 1200 pF max
Switching Frequency	<ul style="list-style-type: none"> • 375 kHz typical
MTBF	<ul style="list-style-type: none"> • >560 Khrs to MIL-STD-217F at 25 °C, GB

Environmental


Operating Temperature	<ul style="list-style-type: none"> • -40 °C to +105 °C, derate from 100% load at +65 °C to no load at +105 °C
Case Temperature	<ul style="list-style-type: none"> • +105 °C max
Storage Temperature	<ul style="list-style-type: none"> • -40 °C to +125 °C
Humidity	<ul style="list-style-type: none"> • Up to 90%, non-condensing
Cooling	<ul style="list-style-type: none"> • Natural convection

Input Voltage	Output Voltage	Output Current	Input Current ⁽¹⁾		Maximum Capacitive Load	Efficiency	Model Number
			No Load	Full Load			
9-18 V	3.3 V	4.000 A	20 mA	1310 mA	1000 µF	85%	JCM1512S3V3
	5.0 V	3.000 A	20 mA	1471 mA	1000 µF	86%	JCM1512S05
	12.0 V	1.300 A	20 mA	1494 mA	330 µF	88%	JCM1512S12
	15.0 V	1.000 A	20 mA	1420 mA	220 µF	89%	JCM1512S15
	±5.0 V	±1.500 A	20 mA	1488 mA	±470 µF	85%	JCM1512D05
	±12.0 V	±0.625 A	20 mA	1420 mA	±220 µF	89%	JCM1512D12
18-36 V	3.3 V	4.000 A	15 mA	647 mA	1000 µF	86%	JCM1524S3V3
	5.0 V	3.000 A	15 mA	727 mA	1000 µF	87%	JCM1524S05
	12.0 V	1.300 A	15 mA	747 mA	330 µF	88%	JCM1524S12
	15.0 V	1.000 A	15 mA	710 mA	220 µF	89%	JCM1524S15
	±5.0 V	±1.500 A	15 mA	744 mA	±470 µF	85%	JCM1524D05
	±12.0 V	±0.625 A	15 mA	718 mA	±220 µF	88%	JCM1524D12
36-75 V	3.3 V	4.000 A	10 mA	327 mA	1000 µF	85%	JCM1548S3V3
	5.0 V	3.000 A	10 mA	368 mA	1000 µF	86%	JCM1548S05
	12.0 V	1.300 A	10 mA	374 mA	330 µF	88%	JCM1548S12
	15.0 V	1.000 A	10 mA	359 mA	220 µF	88%	JCM1548S15
	±5.0 V	±1.500 A	10 mA	377 mA	±470 µF	84%	JCM1548D05
	±12.0 V	±0.625 A	10 mA	363 mA	±220 µF	87%	JCM1548D12
	±15.0 V	±0.500 A	10 mA	359 mA	±100 µF	88%	JCM1548D15

Notes

1. Input current measured at nominal 12 V, 24 V and 48 V input.
2. When one output is set to 100% load, and the other varies between 25% and 100% load.
3. Measured with 1 µF ceramic capacitor and 10 µF tantalum capacitor across output rails.

Mechanical Details

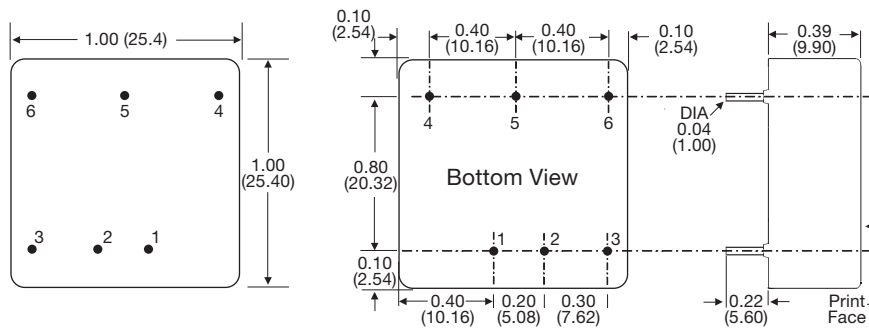


Pin Connections		
Pin	Single	Dual
1	+Vin	+Vin
2	-Vin	-Vin
3	Remote On/Off	Remote On/Off
4	+Vout	+Vout
5	Trim	Com
6	-Vout	-Vout

Notes


1. Pin diameter: 0.004 ±0.002 (1.0 ±0.05)
 2. Pin pitch tolerance: ±0.014 (±0.35)
 3. Case tolerance: ±0.02 (±0.5)
- All dimensions are in inches (mm)
Weight: 0.04 lbs (20 g) approx.

Application Notes

Derating Curve

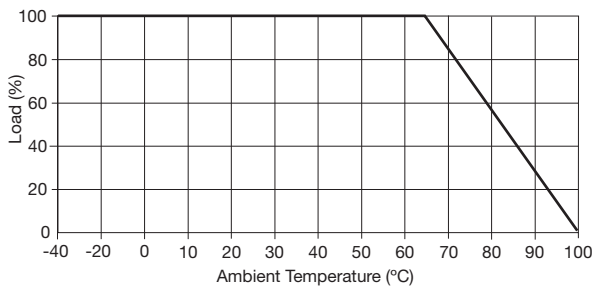

Output Trim

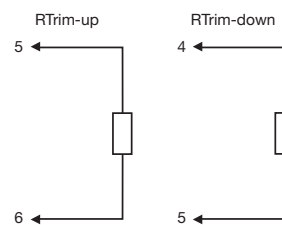

Trim Resistor Values		
Model Number	Trim up 10%	Trim down 10%
JCM15XXS3V3	10 kΩ	15 kΩ
JCM15XXS05	10 kΩ	5 kΩ
JCM15XXS12	22 kΩ	5 kΩ
JCM15XXS15	20 kΩ	6 kΩ

Approximate values.

Output can be externally trimmed by using the method as per above. (Single output models only). For variable trimming, use 100 kΩ potentiometer

Remote On/Off

Output On >3.0 VDC or open circuit
Output Off <1.2 VDC or short circuit pins 2 & 3

Input Filter

