
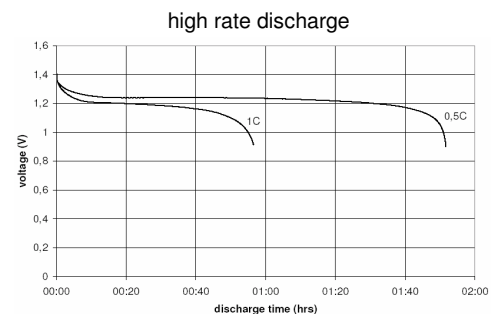
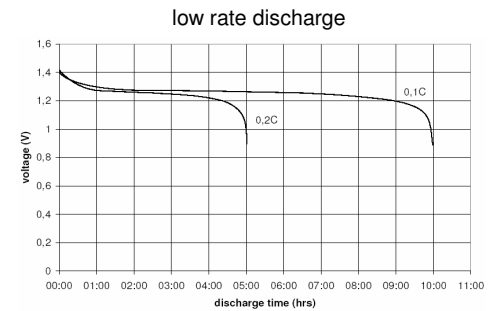
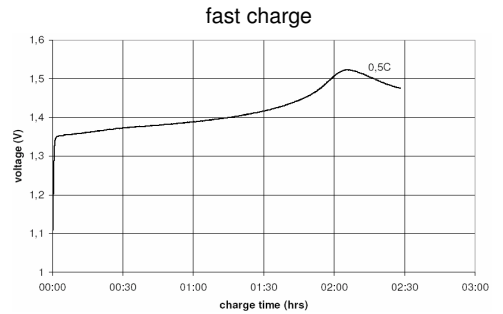


		Conditions	
cell type:		NiMH	
cell size:		AA	
nominal voltage:	1.2	V	
max. charge voltage:	1.5	V at standard charge (0.1C / 20°C)	
capacity			
nominal:	8500	mAh	discharge at 0.2C
minimum:	8000	mAh	discharge at 0.2C
	7500	mAh	discharge at 1C
			1.0V end discharge voltage
			ta: 20°C
max. continuous discharge current:	8000	mA	ta: 0...45°C
charge			
standard charge:	800	mA	14hrs
quick charge:	2300	mA	4hrs
fast charge:	4000	mA	2.2hrs
recommended charge termination control parameters:	0...5	mV	- delta V
	0.8...1	°C	temperature rise per minute
	45...50	°C	TCO (temperature cut off)
trickle charge current:	80...400	mA	(recommended)
continuous overcharge: (less than 1 year)	≤ 800	mA	no conspicuous deformation no leakage
internal resistance: (impedance)	≤ 18	mOhms at 1KHz	battery fully charged
life expectancy:	≥ 500	cycles	accord. IEC standard
self discharge			
charge retention:	≥ 85	%	after 6 months storage
(at ≤ 20°C ambient)	≥ 80	%	after 12 months storage
ambient temperature range:	0...45	°C	standard charge
	10...40	°C	fast charge
	- 20...60	°C	discharge
	- 20...35	°C	storage


Diagrams

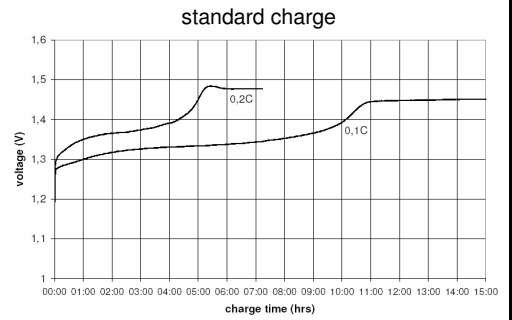

QCT1: 20/7800/25
QCT2: 30/7300/30

mechanical specifications

cell dimensions (incl. label)			
diameter d1:		33.0	- 1.0 mm
diameter d2:	max.	9.5	mm
height h1:		61.5	- 2.0 mm
height h2:	min.	1.5	mm
weight:		155	± 8 g



	ANSMANN Specifications for model:	D - 8500mAh NiMH MaxE Low Self Discharge Type
	data sheet no. / part no.	5035361
	version no.	0
	author / date	Gramlich / 19.09.2008