


Single pole, multiclamp terminal blocks

Screw clamp

DIN 1 - 3

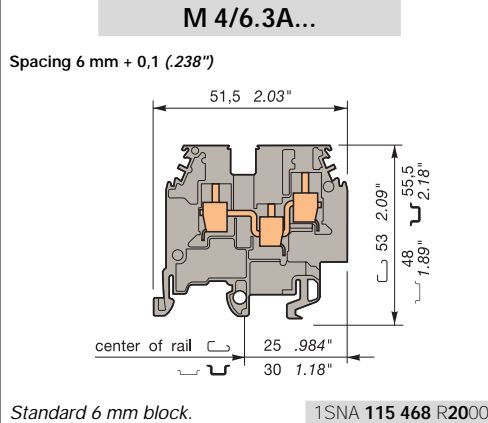


Standard 6 mm block. 1SNA 115 468 R2000

Colour Type Part numbers

Standard blocks

Grey	□	M 4/6.3A	1SNA 115 468 R2000
Blue	□	M 4/6.3A.N	1SNA 125 468 R2200
Beige V0	□	M 4/6.3A.V0	1SNA 195 468 R2100
M 4/6.3A with partition			
Grey	□	M 4/6.3A.1	1SNA 115 483 R0000



Accessories

Type Part numbers

1	End section	grey blue yellow beige	FEM3A FEM3A FEM3A FEM3A V0	th. 3,0 mm th. 3,0 mm th. 3,0 mm th. 3,0 mm	1SNA 116 576 R1500 1SNA 126 576 R1700 1SNA 103 862 R2000 1SNA 196 576 R1600	
2	Circuit separator	grey blue yellow beige	SCM6 SCM6 SCM6 SCM6 V0		1SNA 113 003 R1000 1SNA 123 003 R1200 1SNA 103 020 R2300 1SNA 193 003 R1100	
3	Test socket		AL2 AL3	(1) (1)	DIA. 2,0 mm DIA. 3,0 mm	1SNA 163 043 R2100 1SNA 163 261 R0000
4	Test device		DCJ		yellow	1SNA 173 059 R0300
5	Test plug		FC2		DIA. 2,0 mm	1SNA 007 865 R2600
6	Assembled jumper bar (without IP 20 protection)	32 A 32 A 32 A 32 A 32 A	BJM6 BJM6 BJM6 BJM6 BJM6	(1)(2) (1)(2) (1)(2) (1)(2) (1)(2)	2 poles 3 poles 4 poles 5 poles 10 poles	1SNA 168 516 R2500 1SNA 168 517 R2600 1SNA 168 518 R0700 1SNA 168 519 R0000 1SNA 168 973 R0700
7	Assembled jumper bar (with IP 20 protection)	32 A 32 A 32 A 32 A	BJMI6 BJMI6 BJMI6 BJMI6	(1)(2) (1)(2) (1)(2) (1)(2)	2 poles 3 poles 4 poles 5 poles	1SNA 176 663 R0000 1SNA 176 664 R0100 1SNA 176 665 R0200 1SNA 176 666 R0300
8	Jumper bar not assembled Post + screw + washer Post + screw + washer IP20	32 A	BJS6	(1)(2)	20 poles	1SNA 174 784 R2000
9	Connector plate		EV6 EV6 I EL6			1SNA 168 604 R1600 1SNA 206 394 R0200 1SNA 173 627 R2100
11	Jumper		BJB			1SNA 199 466 R2300
12	Alternated jumper bar	35 A	BJA6	(1)(2)		1SNA 116 541 R1200
13	Universal jumper bar	50 A 70 A 50 A	BJDP1 BJDP3 BJDP4	(1)(2) spacing 6 <-> spacing 16 (1)(2) spacing 6 <-> spacing 12 (1)(2) spacing 6 <-> spacing 8 or 10		1SNA 179 623 R0300 1SNA 179 625 R0500 1SNA 174 781 R2500
14	Pivoting jumper bar	35 A	BJP6	(1)(2)		1SNA 174 413 R1400
15	Comb-type jumper bar	35 A 35 A 35 A 35 A	PC6 PC6 PC6 PC6		2 poles 3 poles 4 poles 10 poles	1SNA 113 546 R1400 1SNA 116 536 R0500 1SNA 116 537 R0600 1SNA 113 548 R2600
16	Insulating tip IDC jumper		EIP AD2,5			1SNA 113 550 R2400 1SNA 114 205 R2000

refer to the section "Special Applications" for part numbers and characteristics.

End stop	th. 9 mm	BADL	V0	1SNA 399 903 R0200
End stop	th. 10 mm	BAM2	V2	1SNA 206 351 R1600
End stop	th. 10 mm	BAM2 V0	V0	1SNA 296 351 R0000
Rail	35 x 7,5 x 1	PR3.Z2		1SNA 174 300 R1700
Rail	35 x 15 x 2,3	PR4		1SNA 168 500 R1200
Rail	35 x 15 x 1,5	PR5		1SNA 168 700 R2200
Rail	32 x 15 x 1,5	PR1.Z2		1SNA 163 050 R0400

Other end stops, rails and accessories : see section on accessories.

Characteristics

Wire size		IEC NFC DIN	UL	CSA
Screw clamp	Solid wire	0,2-4 mm ²	22-10 AWG	12 AWG maxi.
	Stranded wire	0,22-4 mm ²	22-10 AWG	12 AWG maxi.

Voltage			
Rated	800 V	600 V	600 V
Pulse	8 kV		
Pollution degree	3		

Current			
Rated	32 A	20 A	25 A

Wire size			
Rated / Gauge	4 mm ² / A4	10 AWG	12 AWG
Wire strip length	Recomm. Screwdriver	Recomm. torque	Protection
9,5 mm	4 mm	0,5-0,8 Nm	IP 20
.37"	.157"	4,4-7,1 lb.in	NEMA 1

Notes

The use of some accessories may decrease the block's voltage rating. For more information, consult us.



R See section on marking methods
 RC65 - RC610 RCT610
 Nota : (1) A circuit separator SC may be required with the use of these accessories.
 (2) Use of these accessories requires the user to cut out the partition of the terminal block M 4/6.3A.1.