REVISIONS		
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE

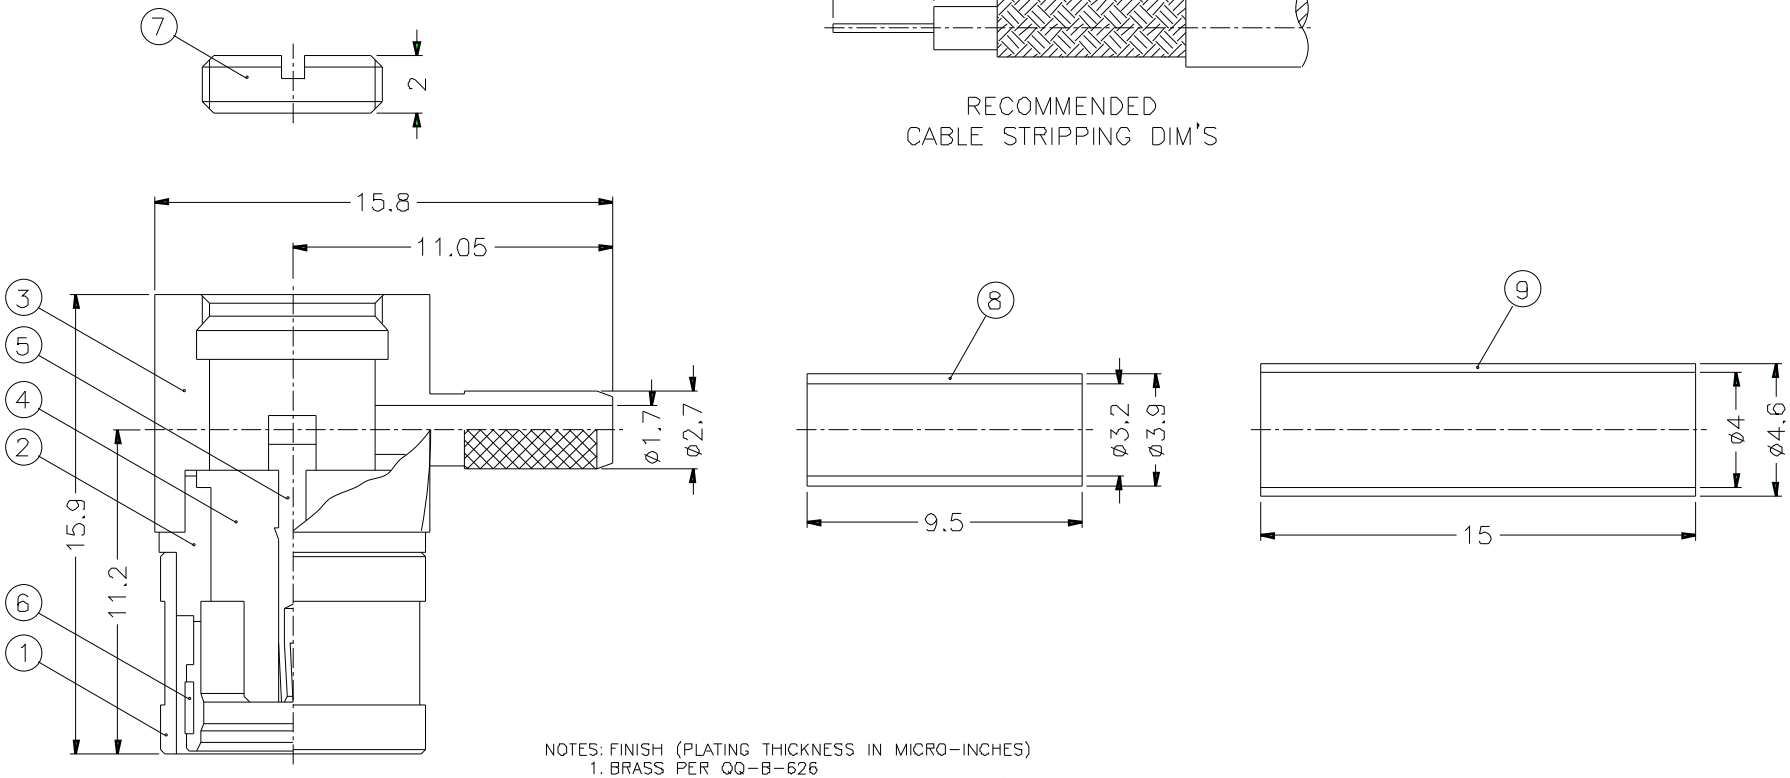

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS PER QQ-B-626
2. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
3 BERYLLIUM COPPER PER QQ-C-530
4. GOLD PL. 30 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
5 TEFLON MIL-P-19468
6. JIS H 3250, C 2700

1. CRIMPED FERRULE
HEX CRIMP SIZE .128"
2. CONTACT PIN TO SOLDER

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.
9	HEAT SHRINK TUBING		BLACK	1	HT-46/4X15
8	FERRULE	NOTE 6	NOTE 2	1	FR-39/32X95
7	NUT	NOTE 1	NOTE 2	1	SMB6112A6-8
6	RETAINER RING	NOTE 3	NATURAL	1	SMB5003-8-75
5	CONTACT PIN	NOTE 3	NOTE 4	1	SMB5090-5-8
4	INSULATOR	NOTE 5	NATURAL	1	SMB6112A6-4T-75
3	BARREL	NOTE 1	NOTE 2	1	SMB6112A6-3-27/17
2	BODY	NOTE 1	NOTE 2	1	SMB6112A6-2
1	SHELL	NOTE 1	NOTE 2	1	SMB5003-1-75

DIMENSIONS ARE IN MILLIMETERS

UNLESS OTHERWISE SPECIFIED TOLERANCES
0.5-6 = ±0.2
6-30 = ±0.4
30-120 = ±0.6
120-315 = ±1
315-1000 = ±1.6
1000-2000 = ±2.4

SCALE 4/1 | ISSUE A

PART NO. SMZ6112A6-3GT30G-6-75

APPROVED | DATE 10-11-01'

CHECKED | DATE 10-11-01'

DRAWN | DATE 10-11-01'

FILE NO

Amphenol

TITLE SMZ R/A CRIMP PLUG (FOR RG-179/U, 187A/U)

DRAWING NO. KJ-SMZ6112A6-3GT30G-179U-75

ITEM NO.