


FEATURES

- Tolerance 1%-5% standard
- Twelve wattage ratings
- Seven package sizes
- Two mounting designs to accommodate your soldering process
- Four power resistor technologies to optimize your operating performance:
 1. Carbon and Ceramic composition for surge and low inductance
 2. Metal film for high ohmic value and low T.C.
 3. Wire element for inrush current combined with low ohmic values. Resistance values as low as 0.005Ω
 4. Power film for high ohmic value and high wattage
- Flexible J-bend terminations
- Working Temperature Range: -55°C to +150°C


DERATING



Surface Mount Power

RC Series: carbon composition (1/4 & 1/2 watt)
 RC Series: ceramic composition (above 1/2 watt)

RF Series: metal film
 RW Series: wirewound
 RP Series: power film

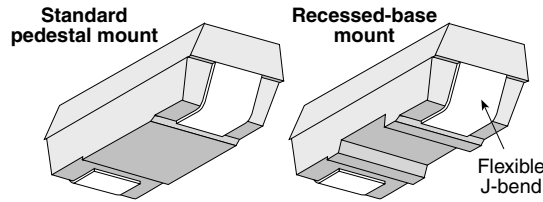

| Series* | Wattage | Ohms | Dimensions (in. / mm) | | | |
|---------|---------|------------|-----------------------|--------------|--------------|---------|
| | | | Length | Height | Width | Voltage |
| RC0S2CA | 0.25 | 2.2–5.6M | 0.394 / 10.01 | 0.159 / 4.04 | 0.159 / 4.04 | 250 |
| RC0R5DB | 0.50 | 2.2–20M | 0.625 / 15.88 | 0.226 / 5.74 | 0.273 / 6.93 | 350 |
| RW0S6BB | 0.6 | 0.005–1K | 0.202 / 5.14 | 0.135 / 3.42 | 0.1 / 2.54 | 50 |
| RF0S8BA | 0.80 | 1.0–10M | 0.246 / 6.25 | 0.136 / 3.45 | 0.136 / 3.45 | 200 |
| RW1S0BA | 1.00 | 0.005–1K | 0.246 / 6.25 | 0.136 / 3.45 | 0.136 / 3.45 | 50 |
| RF1S0CA | 1.00 | 1.0–10M | 0.394 / 10.01 | 0.159 / 4.04 | 0.159 / 4.04 | 350 |
| RC1R0EA | 1.00 | 3.3–100K | 0.811 / 20.60 | 0.273 / 6.93 | 0.273 / 6.93 | 500 |
| RP1S3CA | 1.25 | 1.0–1M | 0.394 / 10.01 | 0.159 / 4.04 | 0.159 / 4.04 | 350 |
| RW1S5CA | 1.50 | 0.005–1.5K | 0.394 / 10.01 | 0.159 / 4.04 | 0.159 / 4.04 | 75 |
| RP1S5CB | 1.50 | 1.0–1M | 0.407 / 10.34 | 0.222 / 5.64 | 0.226 / 5.74 | 350 |
| RP1R5CB | 1.50 | 1.0–1M | 0.407 / 10.34 | 0.222 / 5.64 | 0.226 / 5.74 | 350 |
| RW2S0CB | 2.00 | 0.005–5K | 0.407 / 10.34 | 0.222 / 5.64 | 0.226 / 5.74 | 100 |
| RW2R0CB | 2.00 | 0.005–5K | 0.407 / 10.34 | 0.222 / 5.64 | 0.226 / 5.74 | 100 |
| RP2S0DA | 2.00 | 1.0–1M | 0.455 / 11.56 | 0.226 / 5.74 | 0.24 / 6.10 | 500 |
| RP2R0DA | 2.00 | 1.0–1M | 0.455 / 11.56 | 0.226 / 5.74 | 0.24 / 6.10 | 500 |
| RW2S0DA | 2.00 | 0.005–5K | 0.455 / 11.56 | 0.226 / 5.74 | 0.24 / 6.10 | 100 |
| RW2R0DA | 2.00 | 0.005–5K | 0.455 / 11.56 | 0.226 / 5.74 | 0.24 / 6.10 | 100 |
| RP2R5DB | 2.50 | 1.0–1M | 0.655 / 16.64 | 0.226 / 5.74 | 0.273 / 6.93 | 500 |
| RW3R0DB | 3.00 | 0.005–13K | 0.625 / 15.88 | 0.226 / 5.74 | 0.273 / 6.93 | 200 |
| RP3R0EA | 3.00 | 1.0–1M | 0.811 / 20.60 | 0.273 / 6.93 | 0.273 / 6.93 | 750 |
| RW3R5EA | 3.50 | 0.005–25K | 0.811 / 20.60 | 0.273 / 6.93 | 0.273 / 6.93 | 350 |

Military grade versions available; contact Ohmite.
 *Last two digits designate package size

PERFORMANCE SPECIFICATIONS


| Part Number | Power (watts)* | Maximum voltage | Resistance range | | | Temp. Coefficient | | | Dielectric Withstanding | Tape Size 13" reels | Quantity per reel |
|-------------|----------------|-----------------|------------------|------------------------|----------|-------------------|--------|-------|-------------------------|---------------------|-------------------|
| | | | 1% tol. | 5% tol. | 10% tol. | 0.1Ω–1Ω | 1Ω–10Ω | 10Ω+ | | | |
| RC0S2CA | 0.25 | 250 | — | 2.2Ω–1K | 1K–5.6M | — | ±400 | ±400 | 1000V | 16mm | 1500 |
| RC0R5DB | 0.50 | 350 | — | 2.2Ω–1K | 1K–20M | — | ±400 | ±400 | 1000V | 24mm | 1000 |
| RW0S6BB | 0.6 | 50 | 0.005Ω–1K | 0.005Ω–1K | — | ±90 | ±50 | ±20 | 1000V | 12mm | 2500 |
| RF0S8BA | 0.8 | 200 | 1Ω–5M | — | — | — | ±100 | ±100 | 1000V | 12mm | 2000 |
| RW1S0BA | 1.0 | 50 | 0.005Ω–1K | 0.005Ω–1K | — | ±90 | ±50 | ±20 | 1000V | 12mm | 2000 |
| RF1S0CA | 1.0 | 350 | 10Ω–1M | 1Ω–10M | — | — | ±200 | ±100 | 1000V | 16mm | 1500 |
| RC1R0EA | 1.0 | 500 | — | 3.3–100K(10% tol only) | — | — | — | -1300 | 1000V | 32mm | 750 |
| RP1S3CA | 1.25 | 350 | — | 1Ω–1M | — | — | ±250 | ±250 | 1000V | 16mm | 1500 |
| RP1S5CA | 1.5 | 75 | 0.005Ω–1.5K | 0.005Ω–1.5K | — | ±90 | ±250 | ±250 | 1000V | 16mm | 1500 |
| RP1S5CB | 1.5 | 350 | — | 1Ω–1M | — | — | ±250 | ±250 | 1000V | 16mm | 1000 |
| RP1R5CB | 1.5 | 350 | — | 1Ω–1M | — | — | ±250 | ±250 | 1000V | 16mm | 1000 |
| RW2S0CB | 2.0 | 100 | 0.005Ω–5K | 0.005Ω–5K | — | ±90 | ±50 | ±20 | 1000V | 16mm | 1000 |
| RW2R0CB | 2.0 | 100 | 0.005Ω–5K | 0.005Ω–5K | — | ±90 | ±50 | ±20 | 1000V | 16mm | 1000 |
| RP2S0DA | 2.0 | 500 | — | 1Ω–1M | — | — | ±250 | ±250 | 1000V | 24mm | 1000 |
| RP2R0DA | 2.0 | 500 | — | 1Ω–1M | — | — | ±250 | ±250 | 1000V | 24mm | 1000 |
| RW2S0DA | 2.0 | 100 | 0.005Ω–5K | 0.005Ω–5K | — | ±90 | ±50 | ±20 | 1000V | 24mm | 1000 |
| RW2R0DA | 2.0 | 100 | 0.005Ω–5K | 0.005Ω–5K | — | ±90 | ±50 | ±20 | 1000V | 24mm | 1000 |
| RP2R5DB | 2.5 | 500 | — | 1Ω–1M | — | — | ±250 | ±250 | 1000V | 24mm | 1000 |
| RW3R0DB | 3.0 | 200 | 0.005Ω–13K | 0.005Ω–13K | — | ±90 | ±50 | ±20 | 1000V | 24mm | 1000 |
| RP3R0EA | 3.0 | 750 | — | 1Ω–1M | — | — | ±250 | ±250 | 1000V | 32mm | 750 |
| RW3R5EA | 3.5 | 350 | 0.005Ω–25K | 0.005Ω–25K | — | ±90 | ±50 | ±20 | 1000V | 32mm | 750 |
| RM0R7EA | 0.75 | 2500 | 1KΩ–1000M | 1KΩ–1000M | — | — | — | ±50 | 1000V | 32mm | 750 |

*25°C ambient

(continued)

Surface Mount Power

(continued)

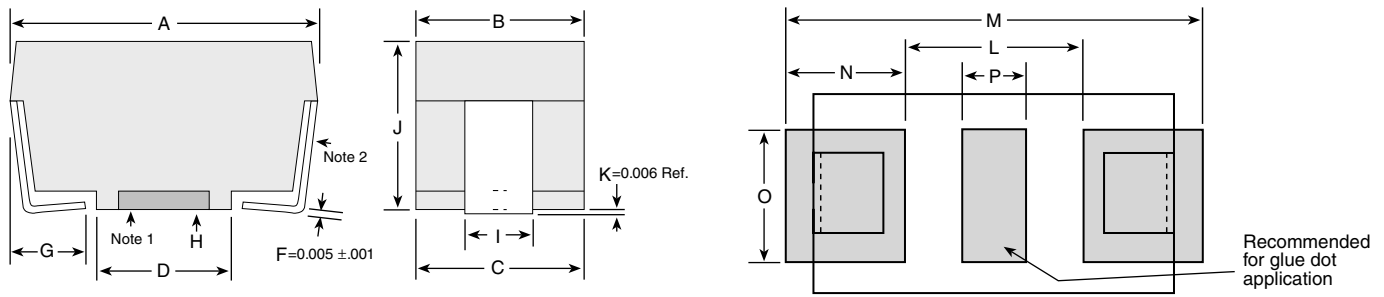


| Packages | Package Outline Dimensions | | | | | | PC Board Land Pattern | | | | | |
|-----------------|----------------------------|------------|-----------|-------------|------------|------------|-----------------------|--------|-------|-------|-------|-------|
| | A | B | C | D | G | I | J | L | M | N | O | P |
| BA (in.) | .246±.020 | .136±.005 | .133 REF | .110±.010 | .047 Nom. | .054±.012 | .136±.005 | .150 | .346 | .098 | .126 | .050 |
| (mm) | 6.248±.508 | 3.454±.127 | 3.378 REF | 2.794±.254 | 1.194 Nom. | 1.372±.305 | 3.454±.127 | 3.81 | 8.79 | 2.49 | 3.20 | 1.27 |
| CA (in.) | .394±.020 | .159±.005 | .156 REF | .220±.010 | .062 Nom. | .078±.012 | .159±.005 | .256 | .524 | .134 | .126 | .060 |
| (mm) | 10.008±.508 | 4.039±.127 | 3.962 REF | 5.588±.254 | 1.575 Nom. | 1.981±.305 | 4.038±.127 | 6.50 | 13.31 | 3.40 | 3.20 | 1.52 |
| CB (in.) | .407±.020 | .226±.005 | .222 REF | .260±.010 | .062 Nom. | .084±.012 | .222±.005 | .276 | .537 | .131 | .126 | .093 |
| (mm) | 10.338±.508 | 5.74±.127 | 5.639 REF | 6.604±.254 | 1.575 Nom. | 2.134±.305 | 5.639±.127 | 7.01 | 13.64 | 3.33 | 3.20 | 2.36 |
| DA (in.) | .455±.020 | .240±.005 | .236 REF | .260±.010 | .062 Nom. | .143±.012 | .226±.005 | .317 | .585 | .134 | .155 | .093 |
| (mm) | 11.557±.508 | 6.096±.127 | 5.994 REF | 6.604±.254 | 1.575 Nom. | 3.632±.305 | 5.740±.127 | 8.05 | 14.86 | 3.40 | 3.94 | 2.36 |
| DB (in.) | .625±.020 | .273±.005 | .268 REF | .417±.010 | .062 Nom. | .143±.012 | .226±.005 | .474 | .742 | .134 | .155 | .093 |
| (mm) | 15.875±.508 | 6.934±.127 | 6.807 REF | 10.592±.254 | 1.575 Nom. | 3.632±.305 | 5.740±.127 | 12.040 | 18.85 | 3.40 | 3.94 | 2.36 |
| EA (in.) | .811±.020 | .273±.005 | .268 REF | .572±.010 | .093 Nom. | .143±.012 | .273±.005 | .611 | 1.000 | .195 | .155 | .093 |
| (mm) | 20.599±.508 | 6.934±.127 | 6.807 REF | 14.529±.254 | 2.362 Nom. | 3.632±.305 | 6.934±.127 | 15.52 | 25.4 | 4.95 | 3.94 | 2.36 |
| BB (in.) | .202±.010 | .10±.010 | .095 REF | .079±.010 | .050 Nom. | .065±.012 | .135±.005 | 0.078 | 0.328 | 0.125 | 0.126 | 0.026 |
| (mm) | 5.140±.508 | 2.54±.127 | 2.41 REF | 2.00±.254 | 1.280 Nom. | 1.640±.305 | 3.420±.127 | 1.98 | 8.33 | 3.18 | 3.20 | 0.66 |

Note 1: Packages BA and CA are only available with a pedestal base. Packages CB and DA are available in either pedestal or recessed base. Packages DB and EA are only available in a recessed base.

Note 2: Test point is .020 above PCB.

Note 3: Tape and reel dimensions per EIA 481 A except "EA" size which is 12 mm component pitch versus 16mm pitch.

Land pattern dimensions are for reference only

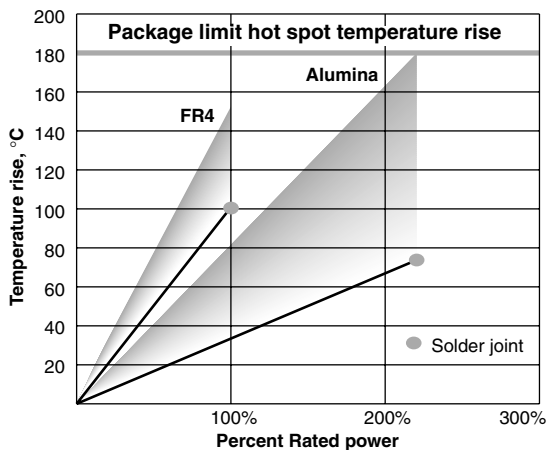


The temperature rise graph data was obtained by a selection of test substrate size and trace width for each resistor size to limit operating temperatures to safe values.

The operating temperature safe rises are either 100°C substrate temperature rise or 180°C package hot spot temperature rise at 25°C ambient.


FR4: 0.062 in. thick; 0.062 in. traces

Alumina: 0.040 in. thick; 0.010 in. traces

Molding material rated at 205°C continuous.

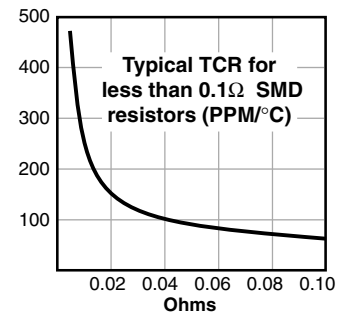

REEL DIMENSIONS

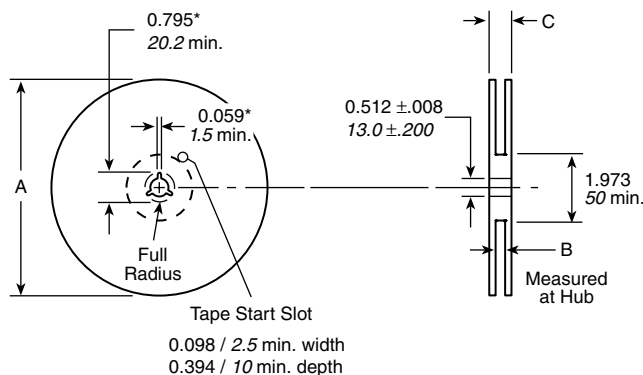

| Size | A nom. | B | C max. | Quantity |
|------|--------|----------------------|--------|--------------------|
| 12mm | 13" | 0.488" +0.078, -0.00 | 0.724" | 2000 pcs. BA or |
| | | 12.4mm +2.0, -0.0 | 18.4mm | 2500 pcs. BB |
| 16mm | 13" | 0.646" +0.078, -0.00 | 0.882" | 1500 pcs. CA or |
| | | 16.4mm +2.0, -0.0 | 22.4mm | 1000 pcs. CB |
| 24mm | 13" | 0.961" +0.078, -0.00 | 1.196" | 1000 pcs. DA or DB |
| | | 24.4mm +2.0, -0.0 | 30.4mm | |
| 32mm | 13" | 1.276" +0.078, -0.00 | 1.52" | 750 pcs. EA |
| | | 32.4mm +2.0, -0.0 | 38.4mm | |

All reels are compatible with major pick-and-place machines and made in accordance with EIA 481 A (except EA size, which is 12mm component pitch versus 16mm pitch).

(continued)

Surface Mount Power

(continued)

PERFORMANCE DATA

| Construction | Temp. cycle (-55°C to 125°C, 1000 cycles) | Load Life (1000 hours at 25°C) | Immersion (260°C for 10 sec.) | Momentary Overload |
|--------------------------------------|---|--------------------------------------|-------------------------------------|-----------------------------|
| RC Carbon/Ceramic Composition | ±4.0%+.05Ω | ±10.0%+.05Ω | ±3.0%+.05Ω | 6.3x rated power for 5 sec. |
| RF Metal Film | ±0.5%+.05Ω | ±0.5%+.05Ω | ±0.1%+.05Ω | 2x rated power for 0.1 sec. |
| RW Wirewound | ±0.5%+.05Ω | ±3.0%+.05Ω | ±0.1%+.05Ω | 5x rated power for 5 sec. |
| RP Power Film | ±3.0%+.05Ω | ±5.0%+.05Ω | ±0.5%+.05Ω | 2x rated power for 0.1 sec. |
| RN Wirewound, Non-inductive | ±0.5%+.05Ω | ±3.0%+.05Ω | ±0.1%+.05Ω | 5x rated power for 5 sec. |

ALL models: **Leaching** (260°C Solder immersion, 60 sec.)..... No visible leaching
Thermal Shock (Units at -55°C, then rated power applied).. No mechanical damage
Flammability UL Material rating, UL94V0

STANDARD PART NUMBERS FOR SURFACE MOUNT POWER RESISTORS

| | | Wirewound | | | | | | | | | |
|----------------------------|---|-----------|-----|-----|-----|-----|-----|-----|-----|-----|--|
| Package style | BA | CA | CB | CB | DA | DA | DB | EA | BB | EA | |
| Base: standard or recessed | S | S | S | R | S | R | R | R | S | R | |
| Wattage | 1.0 | 1.5 | 2.0 | 2.0 | 2.0 | 2.0 | 3.0 | 3.5 | 0.6 | 1.0 | |
| Ohmic value | Part No. | | | | | | | | | | |
| | Prefix | | | | | | | | | | |
| | Suffix | | | | | | | | | | |
| | Tolerance suffix: F = 1% J = 5% K = 10% | | | | | | | | | | |
| 0.005 | R005 | J | J | | F/J | | | | | | |
| 0.010 | R010 | F/J | J | J | F | J | J | J | F | | |
| 0.015 | R015 | F/J | J | | | | | | F | | |
| 0.020 | R020 | J | J | | F | J | | J | F | | |
| 0.025 | R025 | J | | | | | | | | | |
| 0.027 | R027 | J | | | | | | | | | |
| 0.030 | R030 | F | J | J | | | | J | F | | |
| 0.033 | R033 | J | | | | | | | | | |
| 0.036 | R036 | J | | | | | | | | | |
| 0.050 | R050 | F/J | J | | J | F | J | J | F | | |
| 0.056 | R056 | J | | | | | | | | | |
| 0.075 | R075 | J | | | | | | | F | | |
| 0.080 | R080 | J | | | | | | J | | | |
| 0.100 | R100 | F/J | J | J | F | J | J | J | F | | |
| 0.150 | R150 | J | J | J | J | | | | | | |
| 0.200 | R200 | J | J | | | | | J | | | |
| 0.220 | R220 | J | J | | | | | | | | |
| 0.240 | R240 | J | J | | | | | | F | | |
| 0.300 | R300 | J | | J | | | | | | | |
| 0.330 | R330 | J | | J | | | | | | | |
| 0.400 | R040 | J | | | | | | | | | |
| 0.400 | R400 | J | | J | | | | | | | |
| 0.470 | R470 | J | J | | | J | | | F | | |
| 0.500 | R500 | J | J | | J | | | J | | | |
| 0.750 | R750 | J | | | | | | | F | | |
| 1.00 | 1R00 | F/J | J | J | | J | J | | F | | |
| 2.00 | 2R00 | J | | | | | | | F | | |

| | | Wirewound | | | | | | | | | |
|----------------------------|---|-----------|-----|-----|-----|-----|-----|-----|-----|-----|---|
| Package style | BA | CA | CB | CB | DA | DA | DB | EA | BB | EA | |
| Base: standard or recessed | S | S | S | R | S | R | R | R | S | R | |
| Wattage | 1.0 | 1.5 | 2.0 | 2.0 | 2.0 | 2.0 | 3.0 | 3.5 | 0.6 | 1.0 | |
| Ohmic value | Part No. | | | | | | | | | | |
| | Prefix | | | | | | | | | | |
| | Suffix | | | | | | | | | | |
| | Tolerance suffix: F = 1% J = 5% K = 10% | | | | | | | | | | |
| 3.30 | 3R30 | | | | | | | | | | K |
| 4.70 | 4R70 | | | | | | | | | | K |
| 5.00 | 5R00 | | | | | | | | F | | |
| 5.60 | 5R60 | J | | | | | | | | | |
| 6.80 | 6R80 | | | | | | | | | | K |
| 7.50 | 7R50 | | | | | | | J | F | | |
| 10.00 | 10R0 | J | J | | | J | | | F | F | K |
| 15.00 | 15R0 | J | J | | | | | | F | F | K |
| 20.00 | 20R0 | | J | | | | | | | | |
| 22.00 | 22R0 | | | | | | | | F | F | K |
| 24.90 | 24R9 | | | | | | | | F | F | K |
| 33.00 | 33R0 | | | | | | | | F | F | K |
| 36.00 | 36R0 | | | | | | | | F | F | K |
| 47.00 | 47R0 | J | | | | | | J | F | F | K |
| 50.00 | 50R0 | | | | | | | J | | | |
| 51.00 | 51R0 | J | | | | | | | | | |
| 68.00 | 68R0 | | | | | | | | | | K |
| 82.00 | 82R0 | | | J | | | | | | | |
| 100.00 | 100R | | J | | | | | | F | F | K |
| 120.00 | 120R | | J | | | | | | | | |
| 180.00 | 180R | J | | | | | | | | | |
| 300.00 | 300R | J | | | | | | | | | |
| 470.00 | 470R | | | | J | | | | | | |
| 1K | 1K00 | | | | | | J | | | | K |
| 4.7K | 4K70 | | | J | | | | | | | |
| 5K | 5K00 | | | | | | | J | | | |

ORDERING INFORMATION

Component type
R = resistor

Type of Base
S = standard
R = recessed

Package
B = 12mm
C = 16mm
D = 24mm
E = 32mm

Package Modifier
A, B sequential

Tolerance
F = 1%
G = 2%
H = 3%
J = 5%
K = 10%

T = Tape and Reel (optional)

Example Part Number: RW3R5EA1K00FET

Component Modifier
C = carbon/ceramic composition
F = film
P = power film
W = wire
N = wirewound, non-inductive

Wattage
Examples:
1S3 = 1.25W
2S0 or 2R0 = 2.0W
3R5 = 3.5W

Resistance Value
R = Decimal
K = 1,000
M = 1,000,000

E = RoHS compliant
Available Jan. 2006

Examples:
R249 = 0.249 ohms
24R9 = 24.9 ohms
2K49 = 2,490 ohms

(For example, the part number shown is a wirewound resistor, 3.5 watt, recessed base, 32mm tape size, first case size [A], 1000 ohms 1% tolerance.)