

"High Frequency Ceramic Solutions"

5.5 GHz Balun

Detail Specification: 03/18/03

P/N 5400BL15B100


Page 1 of 2

Part Number	Frequency (MHz)	Impedance Unbal. / Bal.	Insertion Loss	Return Loss	Phase Difference	Amplitude Difference
5400BL15B100_	4900 - 5900	50/100 Ω	1.0 dB max.	9.5 dB min.	180° \pm 10°	2.0 dB max.

Input Power	Impedance	Operating Temperature Range	Reel Qty
3 Watts max	50 / 100 Ω	-40 to +85°C	4,000


Mechanical Dimensions

	L	W	T	a	b	c	g	p
Inches	0.079 \pm .004	0.049 \pm .004	0.034 \pm .004	0.012 \pm .004	0.008 \pm .004	0.012 + .004/-0.008	0.014 \pm .004	0.026 \pm .002
mm	2.0 \pm 0.1	1.25 \pm 0.1	0.85 \pm 0.1	0.30 \pm 0.1	0.20 \pm 0.1	0.30+0.1/-0.2	0.35 \pm 0.1	0.65 \pm 0.05

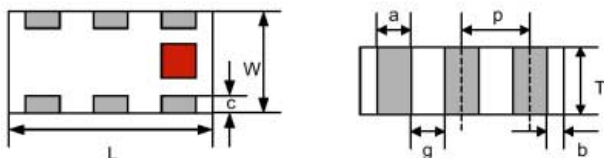


Terminal Configuration

1 Unbalanced Port	4 Balanced Port
2 GND or DC Feed	5 GND
3 Balanced Port	6 NC



Mounting Considerations


Mount devices with colored mark facing up.

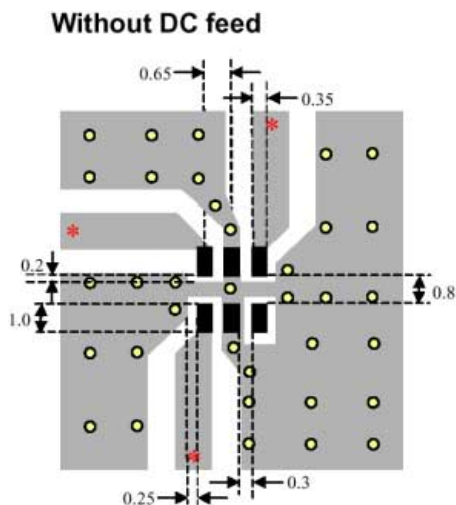

* Line width should be designed to provide 50 Ω impedance matching characteristics.

- Solder Resist
- Land
- Through-hole (ϕ 0.3)

Units: mm

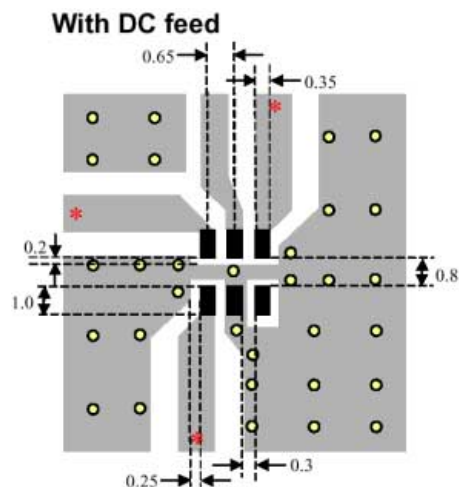

*Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.*

“High Frequency Ceramic Solutions”


5.5 GHz Balun

Detail Specification: 03/18/03

P/N 5400BL15B100

Page 2 of 2

Insertion Loss

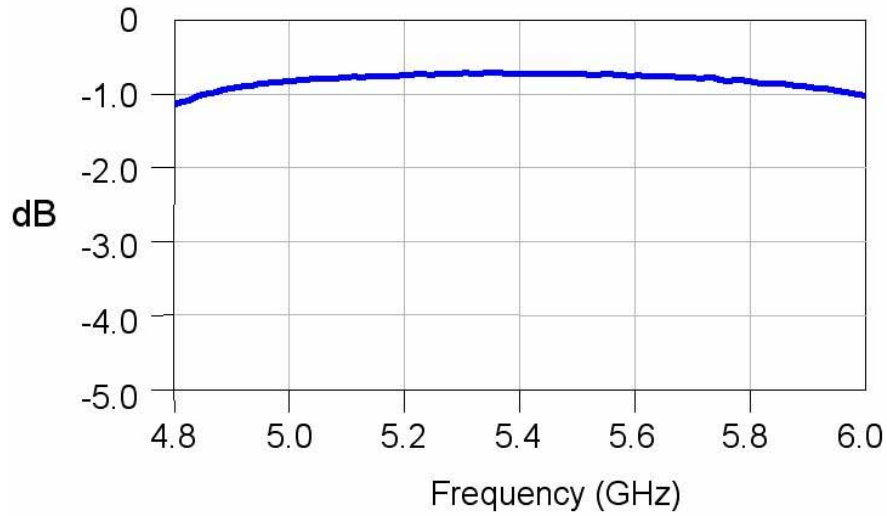

Return Loss

