


5

4

3


2

1

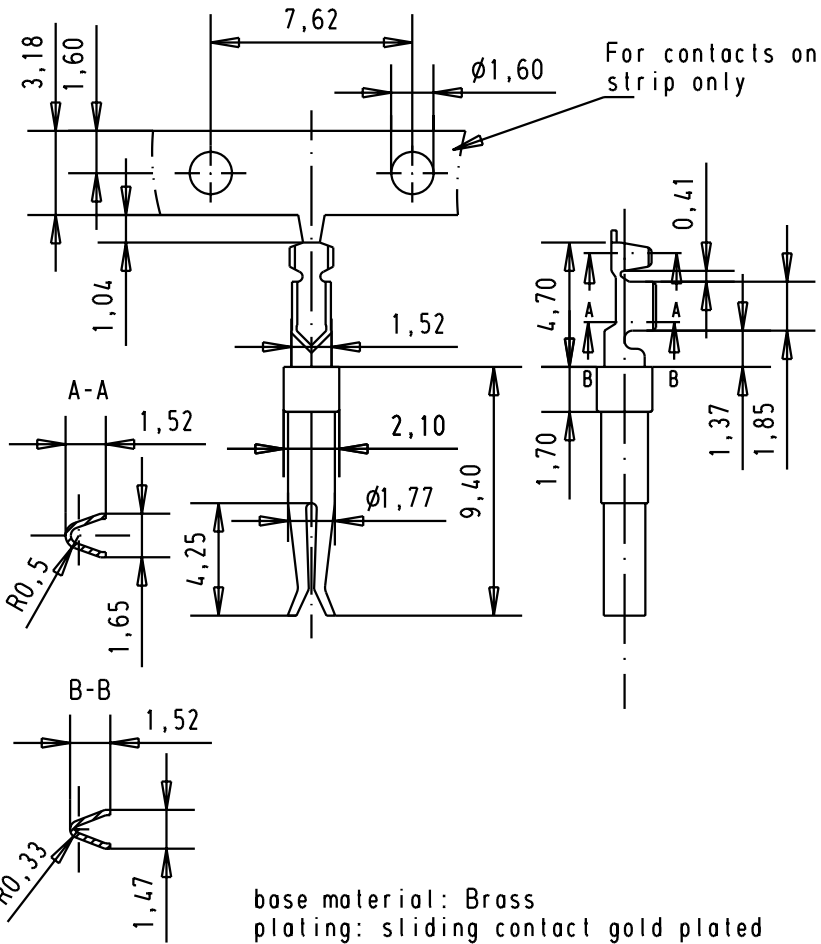

base material: Brass  
 plating: sliding contact gold plated  
 over nickel  
 crimp area SnPb over nickel

| STAMPED MALE CRIMP CONTACTS |                |               |               |               |
|-----------------------------|----------------|---------------|---------------|---------------|
| Number of contacts/reel     | Wire gauge AWG | PL S4         | PL 3          | PL 2          |
| 500                         | AWG 24-28      | 0967 000 7265 | 0967 000 7267 | 0967 000 7268 |

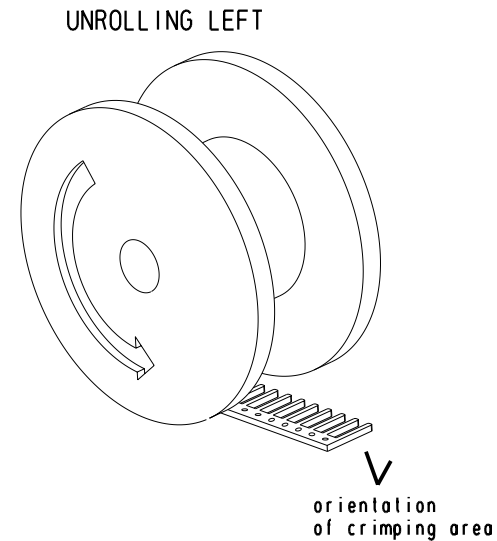



D

C

B

A

|       |           |      |                               |           |      |   |   |                            |
|-------|-----------|------|-------------------------------|-----------|------|---|---|----------------------------|
|       |           |      |                               | Dat.      | Name | <br>All Dim. in mm<br>Orig. Size DIN A 4 | D-Sub, Stamped Female<br>crimp Contacts AWG 24-28<br>500/reel, unrolling left | Maßstab/<br>Scale<br>3.5:1 |
|       |           |      | Detail.                       | 24-MAR-03 | PP   |   |   |                            |
|       |           |      | Insp.                         |           |      |   |   |                            |
|       |           |      | Stand.                        |           |      |   |   |                            |
| 31476 | 24-MAR-03 | PP   | HARTING EURL<br>F-95972 Paris |           |      |    | TB 0967 000 726X  | Blatt/ Page<br>1/          |
| Mod.  | Dat.      | Name |                               |           |      |   |   |                            |