

309 7985



PRODUCT DATA SHEET

LOW COST MICROPROFILE SMD LINE MATCHING TRANSFORMER

P3188

Features

- * Low Cost
- * Surface Mount
- * 7mm seated height
- * Reinforced Isolation
- * Vacuum encapsulated
- * EN41003 and EN60950 certified
- * CSA NRTL/C certified
- * BABT Certificate of Recognition
- * Matches directly to 600Ω lines

Applications

- * Telecommunications
- * V.22bis modems
- * Voice
- * Instrumentation

DESCRIPTION

P3188 is a microprofile transformer for applications where high performance and safety isolation to the most exacting international standards are required in an extremely small case size.

Designed specifically as a surface mount device, the P3188 features a 7mm seated height and is vacuum encapsulated and tested to 6500VDC.

P3188 offers fully reinforced isolation, is ideal for voice telecommunications and low speed data communications whilst capable of being matched to both 600Ω and complex impedance telephone lines.

600Ω telephone lines are matched directly by P3188 without external compensation components.

In instrumentation applications, the P3188 can provide wideband frequency response from 50Hz to 50kHz.

P3188 is certified to EN60950, EN 41003 and CSA C22.2 no. 950-95/UL1950 and is supported by a BABT Certificate of Recognition.



ETAL**P3188****SPECIFICATIONS****Electrical**

At T = 25°C and as circuit Fig. 2 unless otherwise stated.

Parameter	Conditions	Min	Typ	Max	Units
Insertion Loss	f = 2kHz	-	-	3.5	dB
Frequency response	200Hz - 4kHz	-	-	±0.2	dB
Return Loss	200Hz - 4kHz	18	-	-	dB
Distortion ⁽¹⁾	f = 450Hz 0dBm in line, 3rd Harmonic	-	-	-50	dBm
Balance	DC - 5kHz Method TG25	80	-	-	dB
Saturation	Excitation 50Hz 250Vrms. Output voltage across line	-	-	10 65	Vrms Vpeak
Voltage isolation ⁽²⁾	50Hz DC	3.88 5.5	-	-	kVrms kV
Operating range: Functional Storage ⁽⁵⁾	Ambient temperature	-10 -40	-	+70 +125	°C °C

Lumped equivalent circuit parameters as Fig. 1


DC resistance, R_{DC} ⁽³⁾	Sum of windings	168	-	206	Ω
Leakage inductance ΔL		2.9	-	3.5	mH
Shunt inductance L_p ⁽⁴⁾	-43dBm 200Hz	1.1	-	3.2	H
Shunt loss R_p ⁽⁴⁾	-43dBm 200Hz	3.5	-	10	k Ω

Notes

- Third harmonic typically exceeds other harmonics by 20dB.
- Components are 100% tested at 6.5 kVDC.
- Caution: do not pass DC through windings. Telephone line current, etc. must be diverted using choke or semiconductor line hold circuit.
- At signal levels greater than -20dBm, L_p will increase and R_p will decrease slightly but the effect is usually favourable to the return loss characteristic.
- Excludes shipping materials. Components are dry-packed and sealed as shipped. Refer to ETAL for appropriate storage conditions for sealed consignments.

Equivalent Circuit

Fig. 1

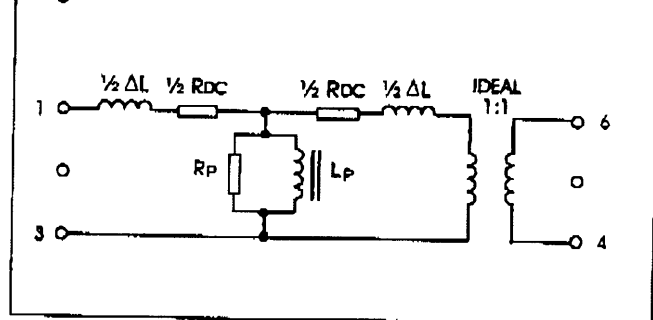





P3188

MATCHING RECOMMENDATIONS



600Ω MATCH

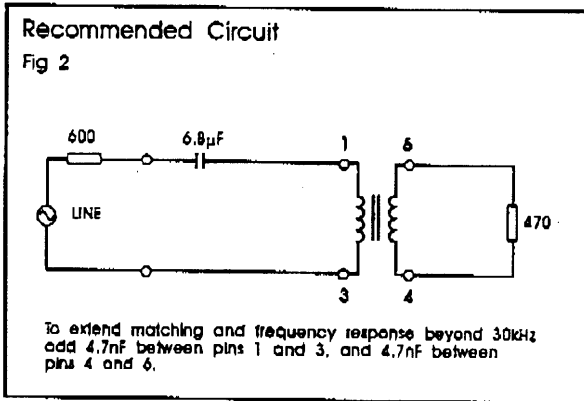

EUROPEAN CTR21 COMPLEX MATCH

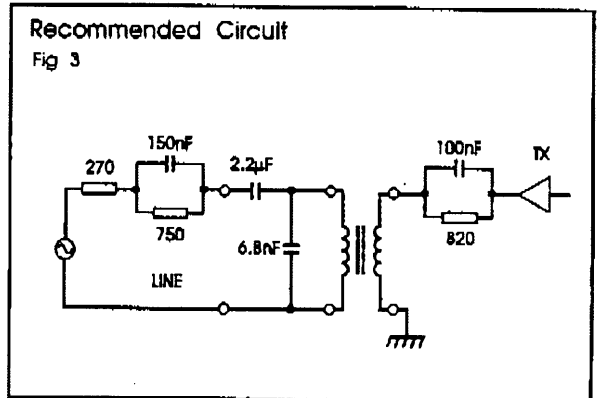

CONSTRUCTION

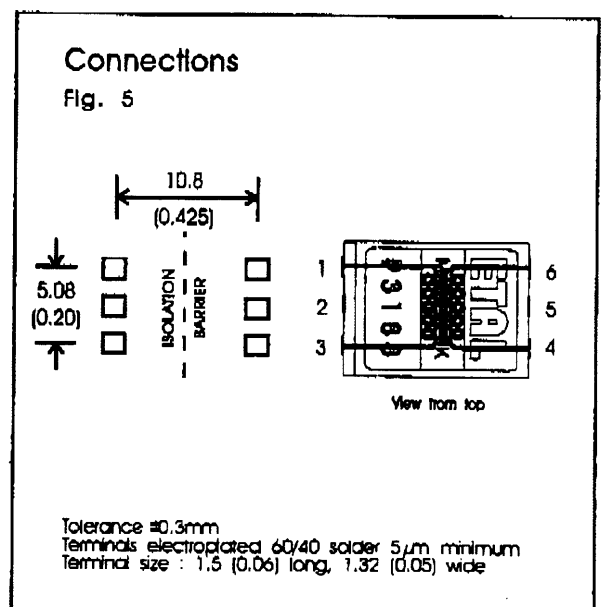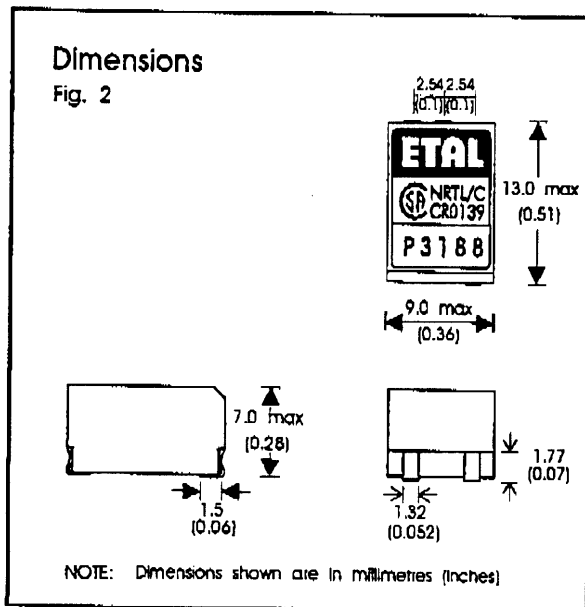

ETAL**P3188****SAFETY**

Manufactured from materials conforming to flammability requirements of UL94V-0 and EN 60950:1992 (BS 7002:1992) sub-clause 1.2.13.2 (V-0).

Distance through reinforced insulation 0.4mm minimum.

Creepage and clearances in circuit are 7mm minimum where PCB pads do not exceed 3mm \varnothing .

Constructed and fully encapsulated in accordance EN 60950:1992 (BS 7002:1992) and BS EN 41003:1997 (reinforced), 250Vrms maximum working voltage.

CERTIFICATION

Certified by BSI (certificate 7536) to BS EN 41003:1997 sub-clauses 4.2.4 and 4.5.3; EN 60590:1992 (BS 7002:1992) and IEC950:1991 sub-clauses 2.2.2, 2.9.1, 2.9.7, 4.4.3 (Class V-0) and 5.3 for a maximum working voltage of 250V and a nominal mains supply voltage of 250V.

Approved and certified by BAPT.

BAPT Certificate of Recognition CR/0139.

CAN/CSA C22.2 no. 950-95/UL1950 certified by CSA. CSA Certificate of Compliance - Certification Number LR110998.

Additionally, ETAL certifies all transformers as providing voltage isolation of 3.88kVrms, 5.5kV DC minimum. All shipments are supported by a certificate of conformity to current applicable safety standards.

ABSOLUTE MAXIMUM RATINGS

(Ratings of components independent of circuit).

Short term isolation voltage (2s)	4.6kVrms, 6.5kVDC	
DC current	100 μ A	
Storage temperature	-40 $^{\circ}$ C to +125 $^{\circ}$ C	
Soldering temperature (10s) profile peak - either	240 $^{\circ}$ C	60s
or	250 $^{\circ}$ C	30s
or	260 $^{\circ}$ C	10s

COPYRIGHT

ETAL and P3188 are Trade Marks of Electronic Techniques (Anglia) Limited.

The Trade Mark ETAL is registered at the UK Trade Marks Registry.

Electronic Techniques (Anglia) Limited is the owner of the design right under the Copyright Designs and Patents Act 1988 and no rights or licences are hereby granted or implied to any third party.

© 1998 Electronic Techniques (Anglia) Limited.
Reproduction prohibited.

ETAL

PM 25326

Electronic Techniques (Anglia) Limited, 10 Betts Avenue, Martlesham Heath, Ipswich, IP5 3RH, England
 Telephone: +44 (0) 1473 611422 Fax: +44 (0) 1473 61191
 Website: www.etal.ltd.uk Email: info@etal.ltd.uk