

GAN-DBFE7X-AG0200C1-XC607-AD

Industrial Connectors:OpenConnector GDM:GAN

Delivery informations

Availability	available
Document created at	18.06.2008


Product description

Description	Cable socket with integrally molded lead (2 m), function indicator (LED), gasket (captive) and central screw M3 (stainless steel, Phillips cross-head)
Type	GAN-DBFE7X-AG0200C1-XC607-AD
Order No.	934 562-019
Other standard types	cable length 5 m: order no. 934 562-020
Number of contacts	2 + PE / connected)
Cable material	PVC
Cable color	grey
Cable length	2 m
Cable diameter	5.5 mm
Conductor size	0.75 mm
Cable specification	LiYY 3G x 0.75 mm ²
Cable type	fire resist. IEC 60332-1, DIN VDE 0472 Part 804 type B
Standard	DIN EN 175 301-803-A
Housing Color	transparent blue
Construction type	A

Description of Wiring

LED color	LED yellow (bipolar)
Voltage rectifier	-
Suppressor	-
Other characteristics	-

Drawing

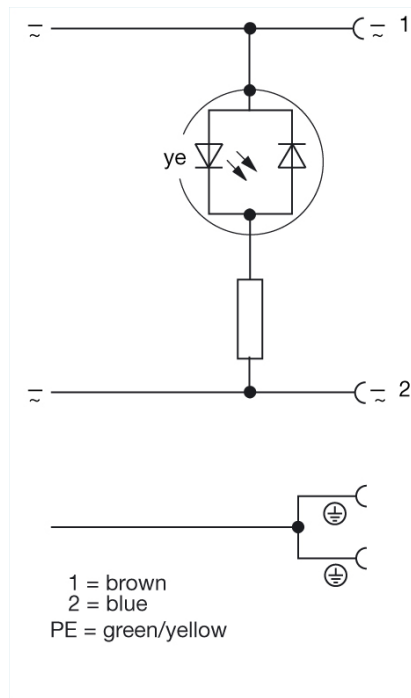

Technical data	
Contact dimensions	6.3 mm x 0.8 mm, 4.8 mm x 0.8 mm
Wire stranding	24 x 0.2
Rated voltage	AC/DC 24 V
Rated current	10 A
Contact resistance	<= 10 mOhm
Mounting	central nut M3
Material	
Contact surface material	Cu/Sn
Contact bearer material	PA 66
Housing material	PUR
Environmental conditions	
Protection class (IEC 60529)	IP 65, IP 67
Pollution severity	3
Temperature range	-25 °C to +80 °C, notice derating
Inflammability class	
Housing	94 HB
Cable	fire resist. IEC 60332-1
Contact bearer	94 V0
Approvals	
UL	-
VDE	VDE
Packing unit	
Packaging unit	50 pieces