
ASSERTA 230 VOLT high output sounder / beacon

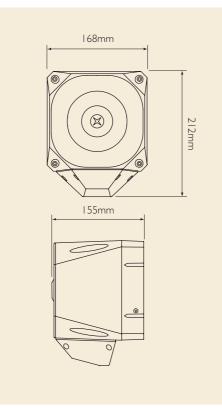

Specification

| Voltage | 230Vac |
|-------------------|------------------------------------|
| Current | 110dB(A) = 50mA $120dB(A) = 105mA$ |
| Output @ I m | 0dB(A) 20dB(A) |
| Tones | 42 |
| Alarm Stages | 3 |
| Flash Rate | Hz |
| Flash Power | 2.0j |
| Temperature | - 20°C to + 70°C |
| Construction Body | PC / ABS |
| Construction Lens | Polycarbonate |
| IP Rating | IP66 |
| Weight | 2.5Kg |
| Body Colour | Red or Grey |
| Lens Colour | Red, Amber or Clear |

The Asserta Industrial warning sounder / beacon is designed to cope with harsh environments requiring protection to IP66. Design features are incorporated to ensure safer and easier installation, while providing flexibility with fewer product variants.

- 230Vac OPERATION
- I I 0dB(A) OR I 20dB(A) OUTPUT VERSION AVAILABLE
- IP66 PROTECTION
- FULLY INTEGRATED ASYMMETRIC BEACON USES LIGHT MORE EFFICIENTLY
- SIMPLE FIRST & SECOND FIX INSTALLATION
- 42 ALARM TONES
- 3 STAGE ALARM
- SOUNDER TIME OUT USER ADJUSTABLE
- OPTIONAL SWIVEL MOUNT BRACKET