
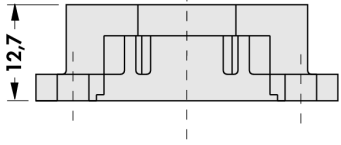
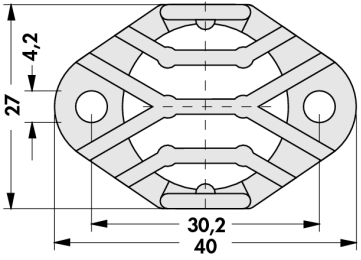

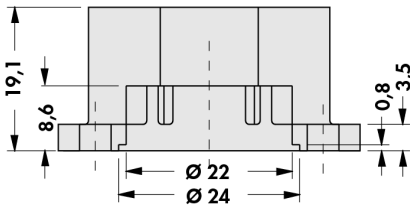
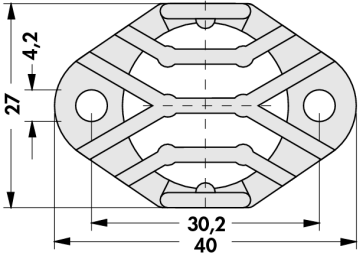

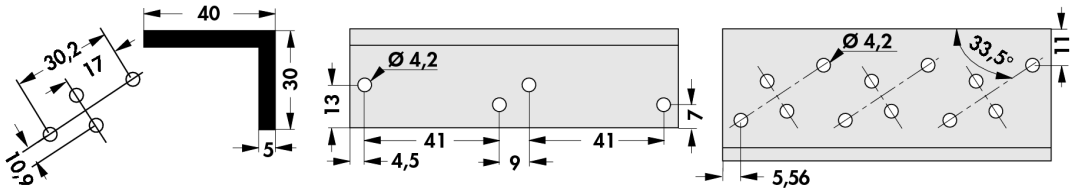


Die-cast heatsinks

setup heatsinks and angle for TO 3

|   |   |   |
|---|---|---|
|  |  |  |
| <p>art. no.</p>   | <p>↔ [mm]</p>   | <p>R<sub>th</sub> [K/W]</p>   |
| <p>AKK 127</p>  | <p>27</p>   | <p>14</p>   |
|  |  |  |
| <p>art. no.</p>   | <p>↔ [mm]</p>   | <p>R<sub>th</sub> [K/W]</p>   |
| <p>AKK 191</p>  | <p>27</p>   | <p>12</p>   |

material: die-casting aluminium  
 surface treatment: black lacquered

|  |  |               |                             |
|--|--|---------------|-----------------------------|
|   |  |               |                             |
| <p>art. no.</p>  | <p>⊗</p>   | <p>↔ [mm]</p> | <p>R<sub>th</sub> [K/W]</p> |
| <p>WP 4030 100 ...</p>   | <p>-</p>   | <p>100</p>    | <p>3.7</p>                  |
| <p>WP 4030 100 3 ...</p>   | <p>TO 3</p>  | <p>100</p>    | <p>3.7</p>                  |
| <p>please indicate: ... surface treatment<br/>                 AL=raw degreased aluminium<br/>                 SA=black anodised</p> |  |               |                             |