

DATA SHEET

051/053 PEC-PW
Aluminum electrolytic capacitors
Power Economic Printed Wiring

Product specification

2000 Jan 18

Supersedes data of January 1998

File under BCcomponents, BC01

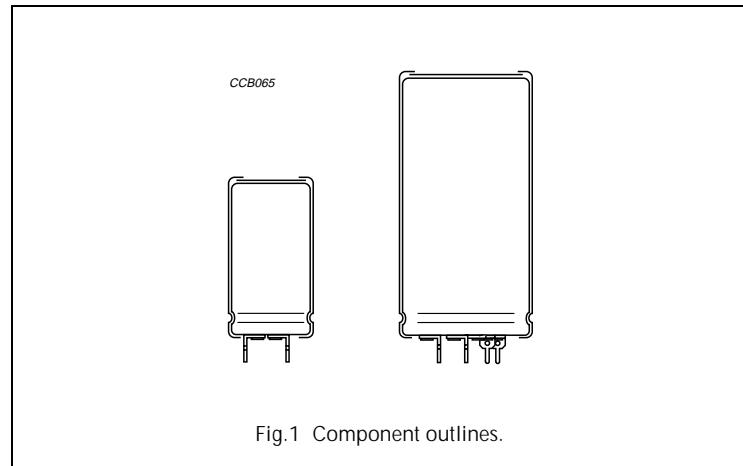
Aluminum electrolytic capacitors

Power Economic Printed Wiring

O51/O53 PEC-PW


FEATURES

- Polarized aluminum electrolytic capacitors, non-solid electrolyte
- Large types with reduced dimensions, cylindrical aluminum case, insulated with a blue sleeve
- Provided with keyed polarity
- Pressure relief on the top of the aluminium case
- Charge and discharge proof
- Long useful life:
12000 hours at 85 °C
- High ripple current capability
- High resistance to shock and vibration.



APPLICATIONS

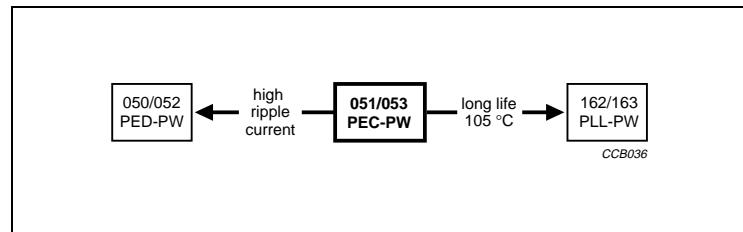- General purpose, industrial and audio/video systems
- Smoothing and filtering
- Standard and switched mode power supplies
- Energy storage in pulse systems.



QUICK REFERENCE DATA

DESCRIPTION	VALUE	
	051	053
Case size ($\varnothing D_{\text{nom}} \times L_{\text{nom}}$ in mm)	25 x 30 to 40 x 100	
Rated capacitance range (E6 series), C_R	680 to 150000 μF	68 to 2200 μF
Tolerance on C_R	$\pm 20\%$	
Rated voltage range, U_R	10 to 100 V	200 to 400 V
Category temperature range	−40 to +85 °C	
Endurance test at 85 °C	5000 hours	
Useful life at 85 °C	12000 hours	
Useful life at 40 °C, $1.4 \times I_R$ applied	200000 hours	
Shelf life at 0 V, 85 °C	500 hours	
Based on sectional specification	IEC 60384-4/EN130300	
Climatic category IEC 60068	40/085/56	

Aluminum electrolytic capacitors

Power Economic Printed Wiring

051/053 PEC-PW

Selection chart for C_R , U_R and relevant nominal case sizes ($\text{ØD} \times \text{L}$ in mm)Preferred types in **bold**


C_R (μF)	U_R (V)								
	10	16	25	40	63	100	200	385	400
68	—	—	—	—	—	—	—	25×30	25×30
100	—	—	—	—	—	—	—	25×40	25×40
150	—	—	—	—	—	—	25×30	30×40	30×40
220	—	—	—	—	—	—	25×40	35×40	35×40
330	—	—	—	—	—	—	30×40	35×50	35×50
	—	—	—	—	—	—	—	40×40	40×40
470	—	—	—	—	—	—	35×40	40×50	40×50
680	—	—	—	—	—	25×30	35×50	40×70	40×70
	—	—	—	—	—	—	40×40	—	—
1000	—	—	—	—	—	25×40	40×50	40×100	40×100
1500	—	—	—	—	—	30×40	40×70	—	—
2200	—	—	—	—	25×30	35×40	40×100	—	—
3300	—	—	—	25×30	25×40	35×50	—	—	—
	—	—	—	—	—	40×40	—	—	—
4700	—	—	25×30	25×40	30×40	40×50	—	—	—
6800	—	25×30	25×40	30×40	35×40	40×70	—	—	—
10000	25×30	25×40	30×40	35×40	35×50	40×100	—	—	—
	—	—	—	—	40×40	—	—	—	—
15000	25×40	30×40	35×40	35×50	40×70	—	—	—	—
	—	—	—	40×40	—	—	—	—	—
22000	30×40	35×40	35×50	40×50	40×100	—	—	—	—
	—	—	40×40	—	—	—	—	—	—
33000	35×40	35×50	40×50	40×70	—	—	—	—	—
	—	40×40	—	—	—	—	—	—	—
47000	35×50	40×50	40×70	40×100	—	—	—	—	—
	40×40	—	—	—	—	—	—	—	—
68000	40×50	40×70	40×100	—	—	—	—	—	—
100000	40×70	40×100	—	—	—	—	—	—	—
150000	40×100	—	—	—	—	—	—	—	—

Aluminum electrolytic capacitors

Power Economic Printed Wiring


051/053 PEC-PW

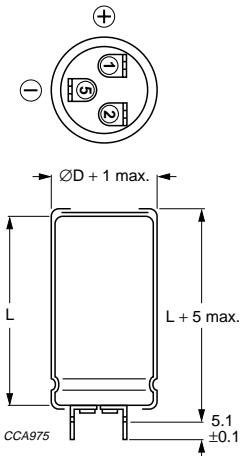MECHANICAL DATA AND PACKAGING QUANTITIES




Dimensions in mm; for L see Table 1.
1 = positive terminal; 5 = negative terminal.
Case $\text{OD} = 25 \text{ mm}$.

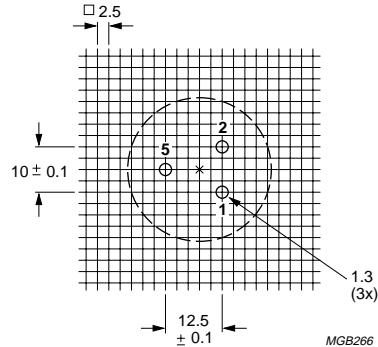Fig.2 Printed wiring pin version.




Dimensions in mm.
Case $\text{OD} = 25 \text{ mm}$.

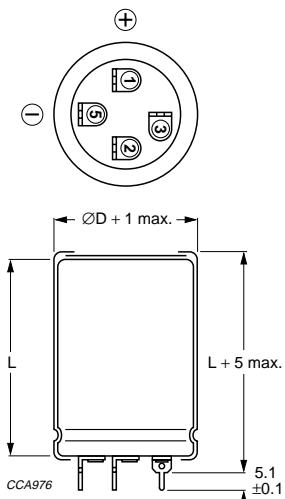Fig.3 Mounting hole diagram viewed from component side.



Dimensions in mm; for L see Table 1.
1 = positive terminal; 5 = negative terminal.
Case $\text{OD} = 30 \text{ mm}$.

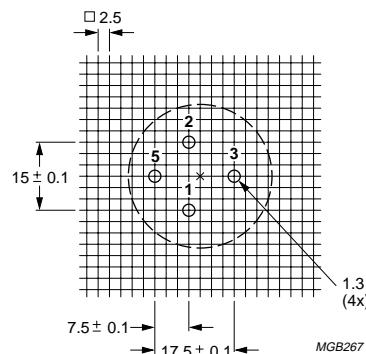Fig.4 Printed wiring pin version.




Dimensions in mm.
Case $\text{OD} = 30 \text{ mm}$.

Fig.5 Mounting hole diagram viewed from component side.

Aluminum electrolytic capacitors

Power Economic Printed Wiring

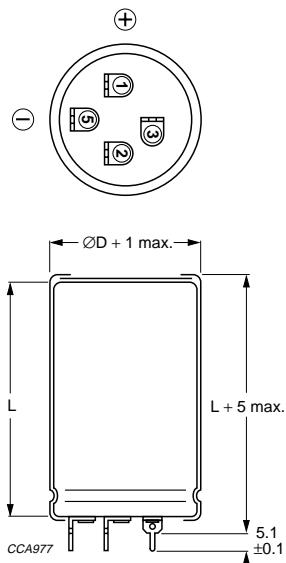051/053 PEC-PW




Dimensions in mm; for L see Table 1.

1 = positive terminal; 5 = negative terminal.

Case $\varnothing D = 35$ mm.

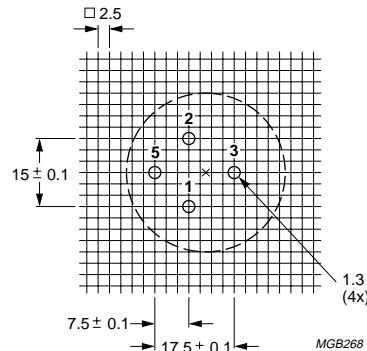Fig. 6 Printed wiring pin version.



Dimensions in mm.

Case $\varnothing D = 35$ mm.

Fig. 7 Mounting hole diagram viewed from component side.


Table 1 Physical dimensions, mass and packaging information; see Figs 2, 4, 6 and 8

NOMINAL CASE SIZE $\varnothing D \times L$ (mm)	$\varnothing D_{\max}$ (mm)	L_{\max} (mm)	MASS (g)	PACKAGING QUANTITIES (units per box)	CARDBOARD BOX DIMENSIONS $l \times w \times h$ (mm)
25 × 30	26	35	≈24	100	290 × 280 × 50
25 × 40	26	45	≈28	100	290 × 280 × 60
30 × 40	31	45	≈38	100	340 × 330 × 60
35 × 40	36	45	≈51	50	390 × 198 × 60
35 × 50	36	55	≈66	50	390 × 198 × 70
40 × 40	41	45	≈78	50	440 × 223 × 60
40 × 50	41	55	≈82	50	440 × 223 × 70
40 × 70	41	75	≈110	50	440 × 223 × 90
40 × 100	41	105	≈176	50	440 × 223 × 120

Aluminum electrolytic capacitors

Power Economic Printed Wiring

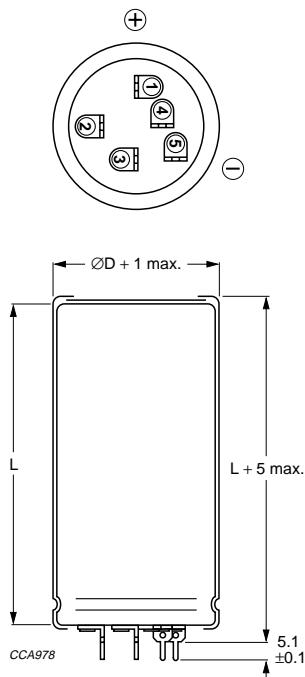051/053 PEC-PW




Dimensions in mm; for L see Table 1.

1 = positive terminal; 5 = negative terminal.

Case ØD = 40 mm.

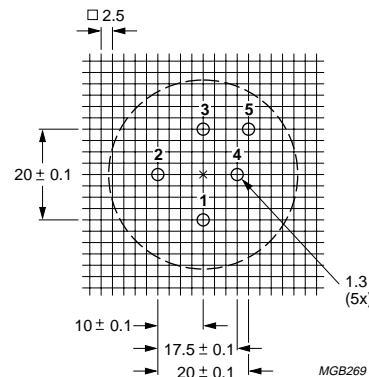Fig. 8 Printed wiring pin version.



Dimensions in mm.

Case ØD = 40 mm.

Fig. 9 Mounting hole diagram viewed from component side.

Mounting

When a number of capacitors are connected in a bank, they must not be closer together than 15 mm, when no derating of ripple current and/or temperature is applied.

Pin numbers 2, 3 and 4 (if present) must be free from the electrical circuit.

MARKING

The capacitors are marked (where possible) with the following information:

- Rated capacitance (in μF)
- Tolerance on rated capacitance (M for $\pm 20\%$)

- Rated voltage (in V)
- Climatic category in accordance with "IEC 60068"
- Date code (year and week) in accordance with "IEC 60062"
- Code for factory of origin
- Name of manufacturer
- Polarity of the terminals and '-' sign to indicate the negative terminal, visible from the top and/or side of the capacitor
- Code number
- Code for basic specification in accordance with "IEC 60384-4-1" and "CECC 30301".

Aluminum electrolytic capacitors

Power Economic Printed Wiring

051/053 PEC-PW

ELECTRICAL DATA AND ORDERING INFORMATION

Unless otherwise specified, all electrical values in Tables 2 and 3 apply at $T_{\text{amb}} = 20^\circ\text{C}$, $P = 86$ to 106 kPa , $\text{RH} = 45$ to 75% .

SYMBOL	DESCRIPTION
C_R	rated capacitance at 100 Hz
I_R	rated RMS ripple current at 100 Hz, 85°C or at 20 kHz, 70°C
I_{L1}	max. leakage current after 1 minute at U_R
I_{L5}	max. leakage current after 5 minutes at U_R
ESR	max. equivalent series resistance at 100 Hz
Z	max. impedance at 10 kHz

Ordering example

Electrolytic capacitor 051 series

10000 $\mu\text{F}/25 \text{ V}; \pm 20\%$ Nominal case size: $\varnothing 30 \times 40 \text{ mm}$

Catalogue number: 2222 051 56103.

Table 2 Electrical data and ordering information for 051 series; preferred types in **bold**

U_R (V)	C_R 100 Hz (μF)	NOMINAL CASE SIZE $\varnothing D \times L$ (mm)	I_R 100 Hz 85°C (A)	I_R 20 kHz 70°C (A)	I_{L1} 1 min (mA)	I_{L5} 5 min (mA)	ESR 100 Hz (m Ω)	Z 10 kHz (m Ω)	CATALOGUE NUMBER 2222
10	10000	25 × 30	3.1	5.9	0.60	0.20	51	40	051 54103
	15000	25 × 40	4.1	7.8	0.90	0.30	37	30	051 54153
	22000	30 × 40	5.0	9.5	1.32	0.44	30	25	051 54223
	33000	35 × 40	5.5	10.4	1.98	0.66	28	24	051 54333
	47000	35 × 50	6.8	12.9	2.82	0.94	23	20	051 54473
	47000	40 × 40	5.8	10.4	2.82	0.94	29	22	051 44473
	68000	40 × 50	7.1	13.5	4.08	1.36	24	20	051 54683
	100000	40 × 70	9.2	17.4	6.00	2.00	19	16	051 54104
	150000	40 × 100	12.0	22.7	9.00	3.00	16	14	051 54154
16	6800	25 × 30	3.1	5.9	0.65	0.22	53	42	051 55682
	10000	25 × 40	4.0	7.6	0.96	0.32	39	34	051 55103
	15000	30 × 40	5.0	9.5	1.44	0.48	31	27	051 55153
	22000	35 × 40	5.5	10.4	2.12	0.71	29	26	051 55223
	33000	35 × 50	6.7	12.7	3.17	1.06	23	21	051 55333
	33000	40 × 40	5.7	10.8	3.17	1.06	30	24	051 45333
	47000	40 × 50	7.0	13.3	4.52	1.51	24	20	051 55473
	68000	40 × 70	9.2	17.4	6.53	2.18	19	16	051 55683
	100000	40 × 100	12.0	22.7	9.60	3.20	16	14	051 55104
25	4700	25 × 30	2.9	5.5	0.71	0.24	60	42	051 56472
	6800	25 × 40	3.9	7.4	1.02	0.34	42	34	051 56682
	10000	30 × 40	4.8	9.1	1.50	0.50	34	27	051 56103
	15000	35 × 40	5.3	10.0	2.25	0.75	30	26	051 56153
	22000	35 × 50	6.5	12.3	3.30	1.10	24	21	051 56223
	22000	40 × 40	5.7	10.8	3.30	1.10	31	24	051 46223
	33000	40 × 50	7.0	13.3	4.95	1.65	25	20	051 56333
	47000	40 × 70	9.2	17.4	7.05	2.35	19	16	051 56473
	68000	40 × 100	12.0	22.7	10.20	3.40	16	14	051 56683

Aluminum electrolytic capacitors

Power Economic Printed Wiring

051/053 PEC-PW

U_R (V)	C_R 100 Hz (μF)	NOMINAL CASE SIZE ØD × L (mm)	I_R 100 Hz 85 °C (A)	I_R 20 kHz 70 °C (A)	I_{L1} 1 min (mA)	I_{L5} 5 min (mA)	ESR 100 Hz (mΩ)	Z 10 kHz (mΩ)	CATALOGUE NUMBER 2222
40	3300	25 × 30	2.9	5.5	0.80	0.27	87	63	051 57332
	4700	25 × 40	3.8	7.2	1.13	0.38	62	47	051 57472
	6800	30 × 40	4.7	8.9	1.64	0.55	49	38	051 57682
	10000	35 × 40	5.2	9.8	2.40	0.80	48	37	051 57103
	15000	35 × 50	6.3	11.9	3.60	1.20	37	28	051 57153
	15000	40 × 40	5.6	10.6	3.60	1.20	50	35	051 47153
	22000	40 × 50	5.8	11.0	5.28	1.76	39	28	051 57223
	33000	40 × 70	7.8	14.8	7.92	2.64	28	21	051 57333
	47000	40 × 100	10.4	19.7	11.28	3.76	22	17	051 57473
	63	2200	25 × 30	2.5	4.7	0.84	0.28	83	62
63	3300	25 × 40	3.3	6.2	1.25	0.42	58	42	051 58332
	4700	30 × 40	4.1	7.8	1.78	0.60	49	38	051 58472
	6800	35 × 40	4.5	8.5	2.57	0.86	48	37	051 58682
	10000	35 × 50	5.4	10.2	3.78	1.26	37	28	051 58103
	10000	40 × 40	4.6	8.7	3.78	1.26	52	37	051 48103
	15000	40 × 70	7.5	14.2	5.67	1.89	29	24	051 58153
	22000	40 × 100	10.0	19.0	8.32	2.77	22	19	051 58223
	100	680	25 × 30	1.74	3.30	0.41	0.14	190	130
100	1000	25 × 40	2.34	4.44	0.60	0.20	130	90	051 59102
	1500	30 × 40	2.95	5.59	0.90	0.30	95	67	051 59152
	2200	35 × 40	3.69	7.00	1.32	0.44	71	53	051 59222
	3300	35 × 50	4.37	8.29	1.98	0.66	55	41	051 59332
	3300	40 × 40	4.16	7.89	1.98	0.66	64	48	051 49332
	4700	40 × 50	5.21	9.88	2.82	0.94	49	38	051 59472
	6800	40 × 70	6.97	13.22	4.08	1.36	35	28	051 59682
	10000	40 × 100	9.50	18.00	6.00	2.00	26	21	051 59103

Aluminum electrolytic capacitors

Power Economic Printed Wiring

051/053 PEC-PW

Table 3 Electrical data and ordering information for 053 series; preferred types in **bold**

U_R (V)	C_R 100 Hz (μ F)	NOMINAL CASE SIZE \varnothing D × L (mm)	I_R 100 Hz 85 °C (A)	I_R 20 kHz 70 °C (A)	I_{L1} 1 min (mA)	I_{L5} 5 min (mA)	ESR 100 Hz (mΩ)	Z 10 kHz (mΩ)	CATALOGUE NUMBER 2222
200	150	25 × 30	0.70	1.33	0.18	0.06	1000	770	053 52151
	220	25 × 40	0.94	1.78	0.26	0.09	680	525	053 52221
	330	30 × 40	1.27	2.41	0.40	0.14	460	360	053 52331
	470	35 × 40	1.66	3.15	0.57	0.19	320	250	053 52471
	680	35 × 50	2.19	4.15	0.82	0.28	220	170	053 52681
	680	40 × 40	2.17	4.11	0.82	0.28	220	170	053 42681
	1000	40 × 50	2.86	5.42	1.20	0.40	150	115	053 52102
	1500	40 × 70	3.81	7.22	1.80	0.60	110	85	053 52152
	2200	40 × 100	5.20	9.86	2.64	0.88	80	60	053 52222
385	68	25 × 30	0.47	0.89	0.16	0.06	2200	1480	053 58689
	100	25 × 40	0.64	1.21	0.23	0.08	1500	1020	053 58101
	150	30 × 40	0.90	1.71	0.35	0.12	1000	700	053 58151
	220	35 × 40	1.15	2.18	0.51	0.17	680	480	053 58221
	330	35 × 50	1.53	2.90	0.77	0.26	450	340	053 58331
	330	40 × 40	1.52	2.88	0.77	0.26	450	340	053 48331
	470	40 × 50	1.96	3.72	1.09	0.36	320	260	053 58471
	680	40 × 70	2.70	5.12	1.58	0.53	220	190	053 58681
	1000	40 × 100	3.70	7.02	2.31	0.78	180	140	053 58102
400	68	25 × 30	0.54	1.02	0.16	0.06	2100	1000	053 56689
	100	25 × 40	0.73	1.38	0.24	0.08	1400	780	053 56101
	150	30 × 40	0.98	1.86	0.36	0.12	950	520	053 56151
	220	35 × 40	1.28	2.43	0.52	0.17	650	400	053 56221
	330	35 × 50	1.67	3.17	0.79	0.26	480	280	053 56331
	330	40 × 40	1.67	3.17	0.79	0.26	480	280	053 46331
	470	40 × 50	2.12	4.02	1.12	0.37	340	220	053 56471
	680	40 × 70	2.90	5.50	1.63	0.54	235	155	053 56681
	1000	40 × 100	4.05	7.68	2.40	0.80	160	110	053 56102

Aluminum electrolytic capacitors

Power Economic Printed Wiring

051/053 PEC-PW

Additional electrical data

PARAMETER	CONDITIONS	VALUE
Voltage		
Surge voltage	$\leq 250 \text{ V}$ versions	$U_S = 1.15 \times U_R$
	$\geq 385 \text{ V}$ versions	$U_S = 1.1 \times U_R$
Reverse voltage		$U_{rev} \leq 1 \text{ V}$
Current		
Leakage current	after 1 minute at U_R	$I_{L1} \leq 0.006C_R \times U_R + 4 \mu\text{A}$
	after 5 minutes at U_R	$I_{L5} \leq 0.002C_R \times U_R + 4 \mu\text{A}$
Inductance		
Equivalent series inductance (ESL)	case $\emptyset D = 25 \text{ mm}$	max. 25 nH
	case $\emptyset D = 30 \text{ and } 35 \text{ mm}$	max. 30 nH
	case $\emptyset D = 40 \text{ mm}$	max. 35 nH

Capacitance (C)


Curve 1: $U_R = 100 \text{ V}$ and 200 V .Curve 2: $U_R = 10 \text{ V}, 16 \text{ V}, 25 \text{ V}, 40 \text{ V}$ and 63 V .Curve 3: $U_R = 385 \text{ V}$. C_0 = capacitance at 20°C and 100 Hz .

Fig.10 Typical multiplier of capacitance as a function of ambient temperature.

Aluminum electrolytic capacitors

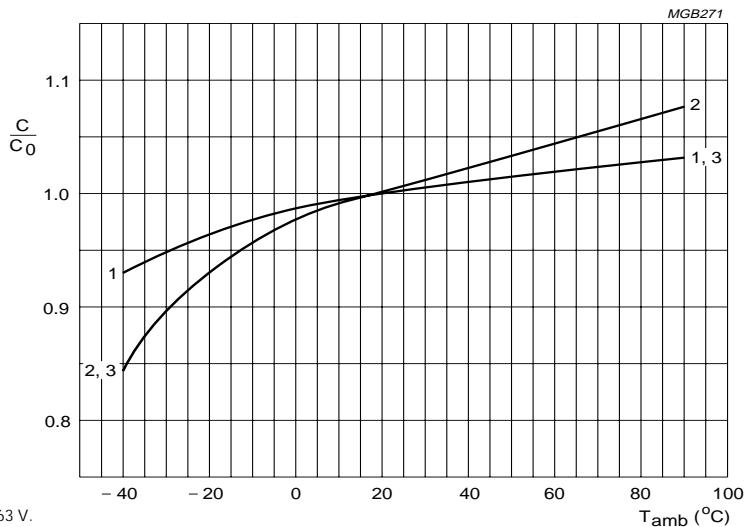Power Economic Printed Wiring

O51/O53 PEC-PW

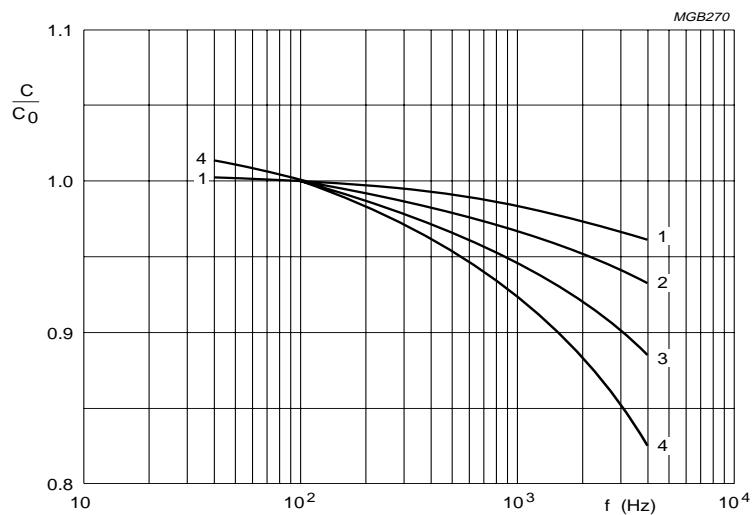


Fig.11 Typical multiplier of capacitance as a function of frequency.

Equivalent series resistance (ESR)


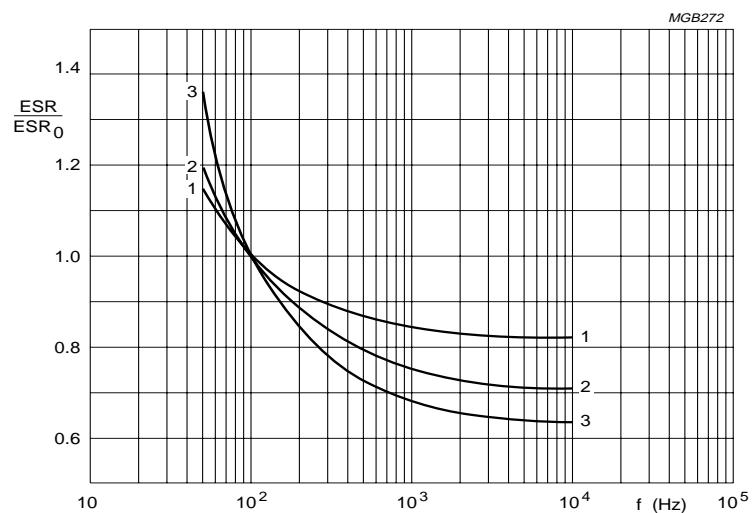


Fig.12 Typical multiplier of typical ESR as a function of frequency.

Aluminum electrolytic capacitors

Power Economic Printed Wiring

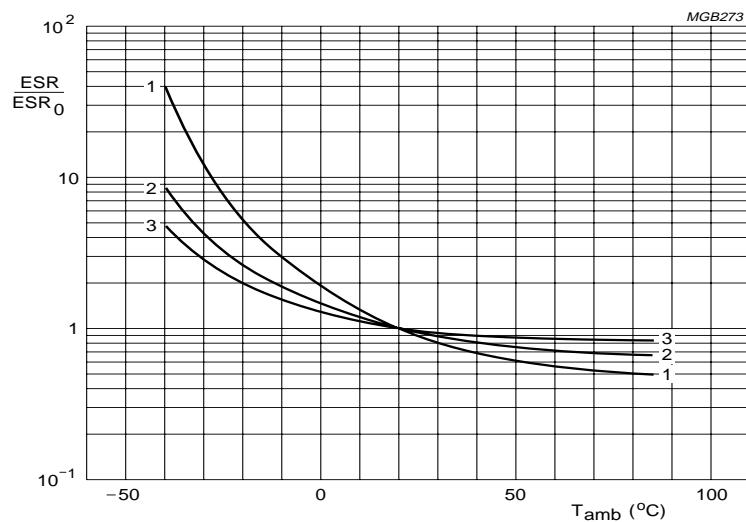
051/053 PEC-PW



Curve 1: $U_R = 385$ V.
 Curve 2: $U_R = 100$ V and 200 V.
 Curve 3: $U_R = 10$ V to 63 V.

ESR_0 = typical at 20°C and 100 Hz.
 Case $\emptyset D \times L = 25 \times 30, 25 \times 40, 30 \times 40$ and 35×40 mm.

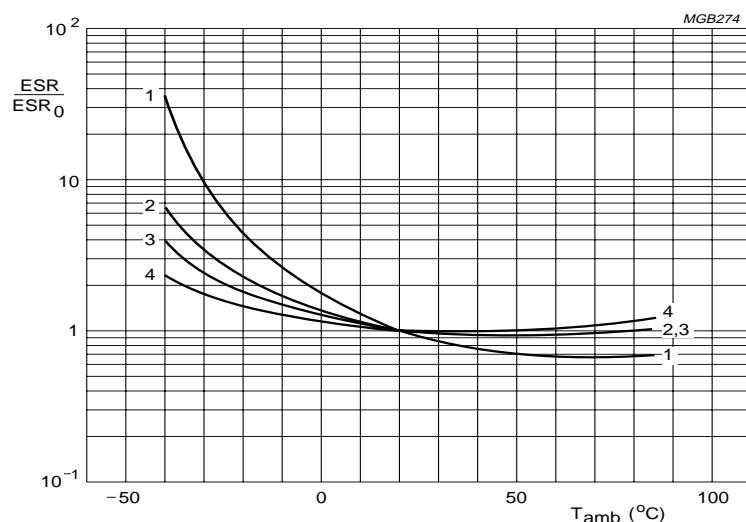Fig.13 Typical multiplier of ESR as a function of ambient temperature.



Curve 1: $U_R = 385$ V.
 Curve 2: $U_R = 200$ V.
 Curve 3: $U_R = 100$ V.
 Curve 4: $U_R = 10$ V to 63 V.

ESR_0 = typical at 20°C and 100 Hz.
 Case $\emptyset D \times L = 35 \times 50, 40 \times 40, 40 \times 50, 40 \times 70$ and 40×100 mm.

Fig.14 Typical multiplier of ESR as a function of ambient temperature.

Aluminum electrolytic capacitors

Power Economic Printed Wiring

051/053 PEC-PW

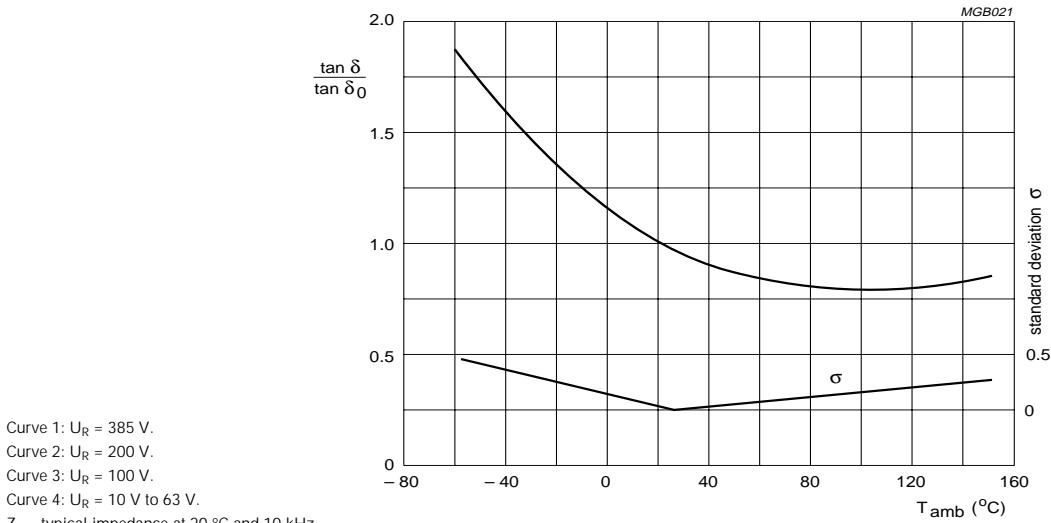
Impedance (Z)

Fig.15 Typical multiplier of impedance as a function of ambient temperature.

Curve 1: $U_R = 385$ V.
 Curve 2: $U_R = 200$ V.
 Curve 3: $U_R = 100$ V.
 Curve 4: $U_R = 10$ V to 63 V.

Z_0 = typical impedance at 20 °C and 10 kHz.
 Case $\text{ØD} \times L = 25 \times 30, 25 \times 40, 30 \times 40$ and 35×40 mm.

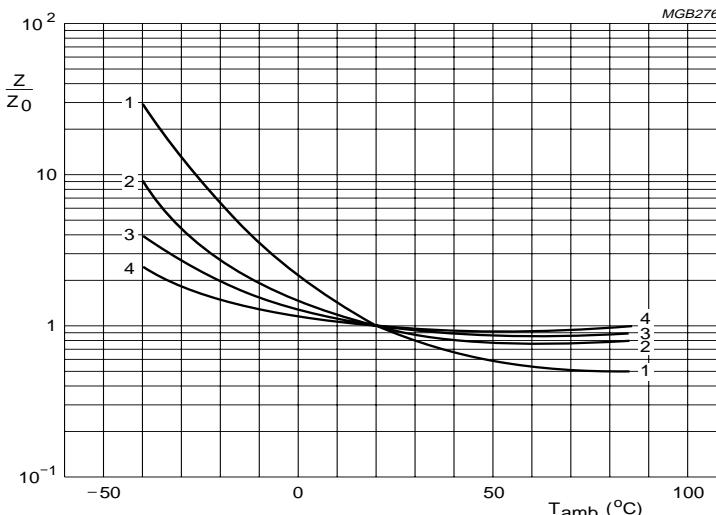


Fig.16 Typical multiplier of impedance as a function of ambient temperature.

Aluminum electrolytic capacitors

Power Economic Printed Wiring

051/053 PEC-PW

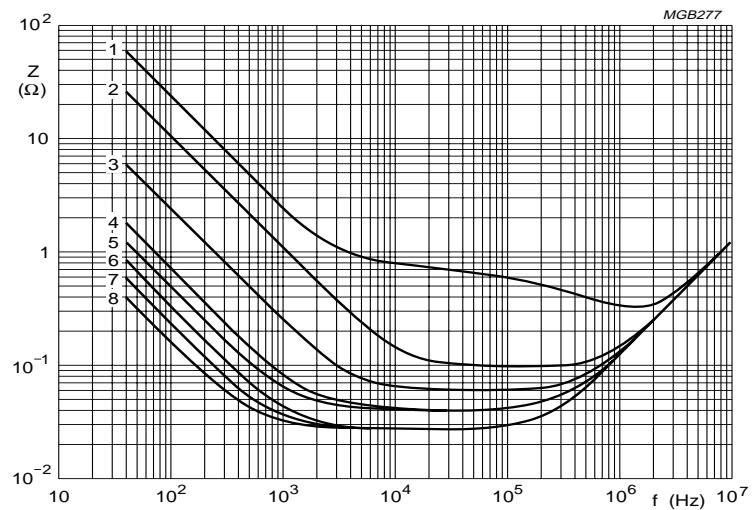


Fig.17 Typical impedance as a function of frequency.

Curve 1: $100 \mu\text{F}, 385 \text{ V}$.
 Curve 2: $220 \mu\text{F}, 200 \text{ V}$.
 Curve 3: $1000 \mu\text{F}, 100 \text{ V}$.
 Curve 4: $3300 \mu\text{F}, 63 \text{ V}$.
 Curve 5: $4700 \mu\text{F}, 40 \text{ V}$.
 Curve 6: $6800 \mu\text{F}, 25 \text{ V}$.
 Curve 7: $10000 \mu\text{F}, 16 \text{ V}$.
 Curve 8: $15000 \mu\text{F}, 10 \text{ V}$.

Case $\emptyset D \times L = 25 \times 40 \text{ mm}$.
 $T_{\text{amb}} = 20^\circ\text{C}$.

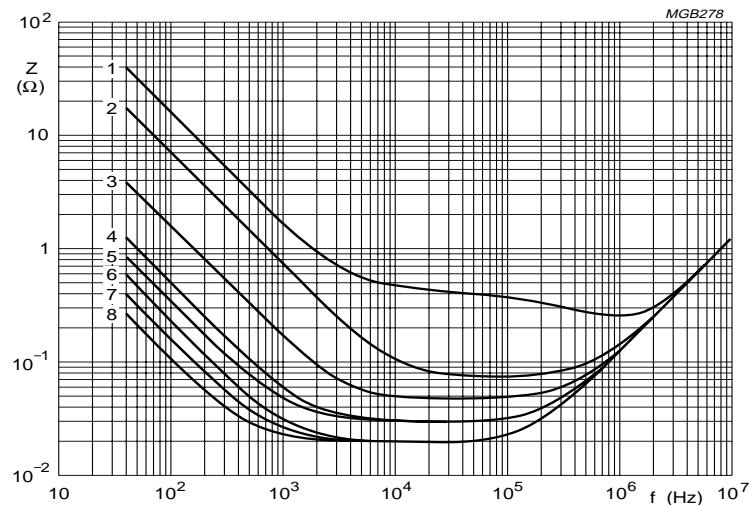


Fig.18 Typical impedance as a function of frequency.

Aluminum electrolytic capacitors

Power Economic Printed Wiring

051/053 PEC-PW

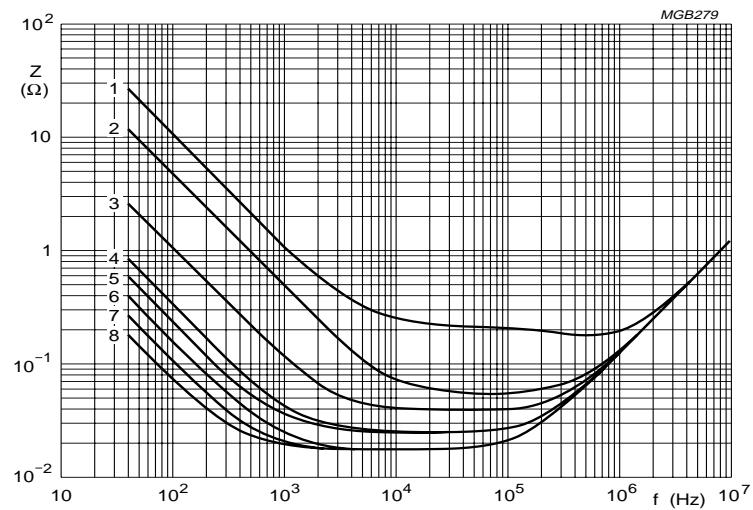


Fig.19 Typical impedance as a function of frequency.

Curves:

- Curve 1: $220 \mu\text{F}, 385 \text{ V}$.
- Curve 2: $470 \mu\text{F}, 200 \text{ V}$.
- Curve 3: $2200 \mu\text{F}, 100 \text{ V}$.
- Curve 4: $6800 \mu\text{F}, 63 \text{ V}$.
- Curve 5: $10000 \mu\text{F}, 40 \text{ V}$.
- Curve 6: $15000 \mu\text{F}, 25 \text{ V}$.
- Curve 7: $22000 \mu\text{F}, 16 \text{ V}$.
- Curve 8: $33000 \mu\text{F}, 10 \text{ V}$.

Case $\emptyset D \times L = 35 \times 40 \text{ mm}$.
 $T_{\text{amb}} = 20^\circ\text{C}$.

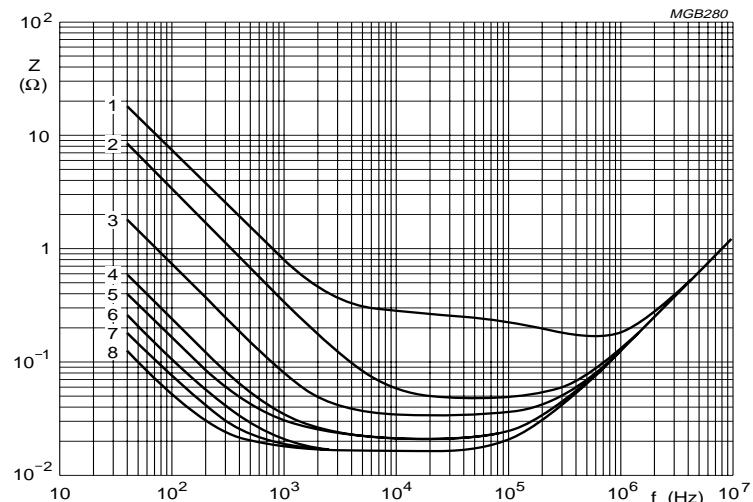


Fig.20 Typical impedance as a function of frequency.

Aluminum electrolytic capacitors

Power Economic Printed Wiring

051/053 PEC-PW

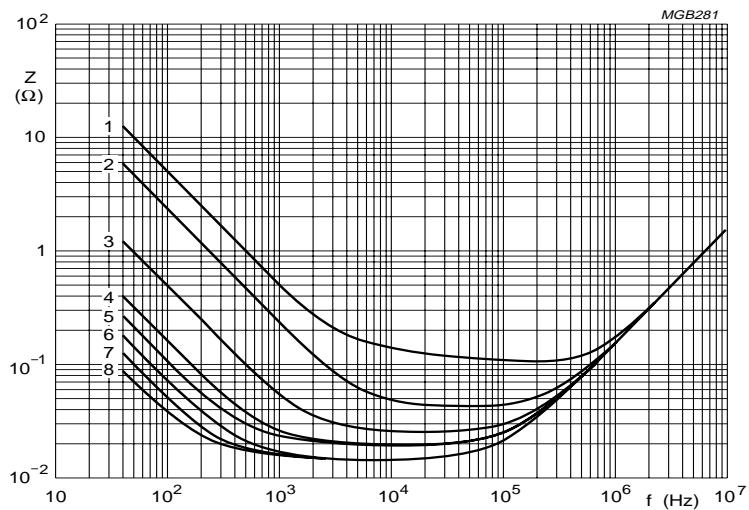


Fig.21 Typical impedance as a function of frequency.

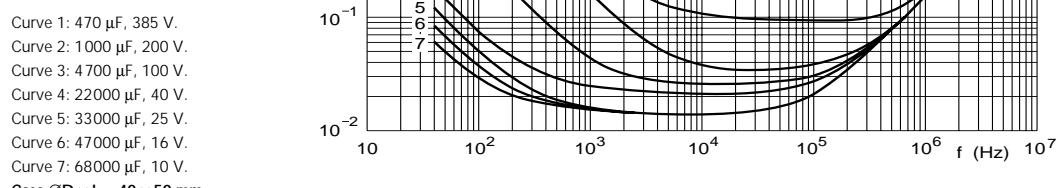


Fig.22 Typical impedance as a function of frequency.

Aluminum electrolytic capacitors

Power Economic Printed Wiring

051/053 PEC-PW

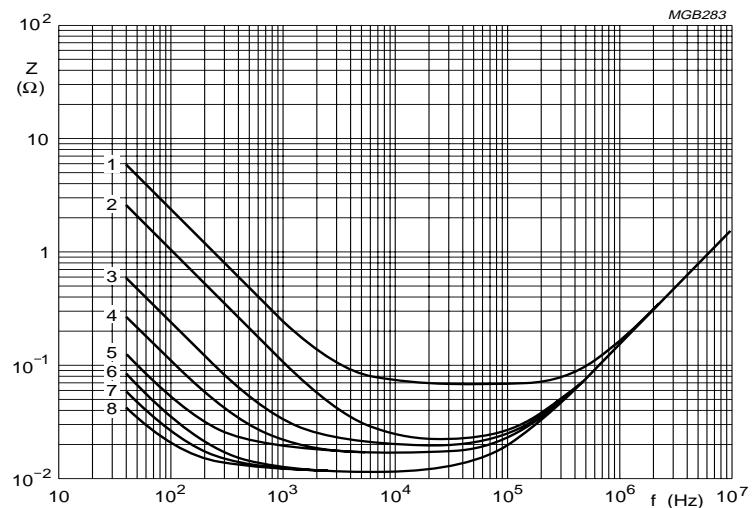


Fig.23 Typical impedance as a function of frequency.

Curve 1: 1000 μ F, 385 V.
 Curve 2: 2200 μ F, 200 V.
 Curve 3: 10000 μ F, 100 V.
 Curve 4: 22000 μ F, 63 V.
 Curve 5: 47000 μ F, 40 V.
 Curve 6: 68000 μ F, 25 V.
 Curve 7: 100000 μ F, 16 V.
 Curve 8: 150000 μ F, 10 V.

Case $\text{ØD} \times L = 40 \times 100$ mm.
 $T_{\text{amb}} = 20^\circ\text{C}$.

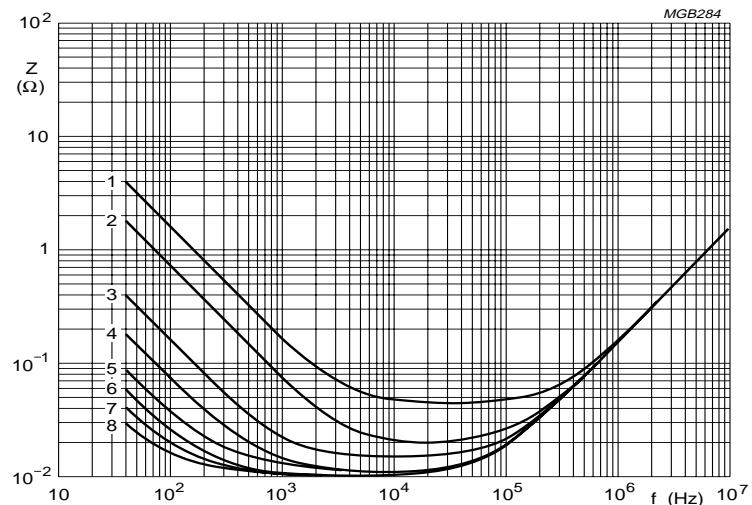


Fig.24 Typical impedance as a function of frequency.

Aluminum electrolytic capacitors


Power Economic Printed Wiring

051/053 PEC-PW

RIPPLE CURRENT AND USEFUL LIFE

Table 4 Multiplier of ripple current (I_R) as a function of frequency

FREQUENCY (Hz)	I_R MULTIPLIER
50	0.83
100	1.00
200	1.10
400	1.15
1000	1.19
≥ 2000	1.20

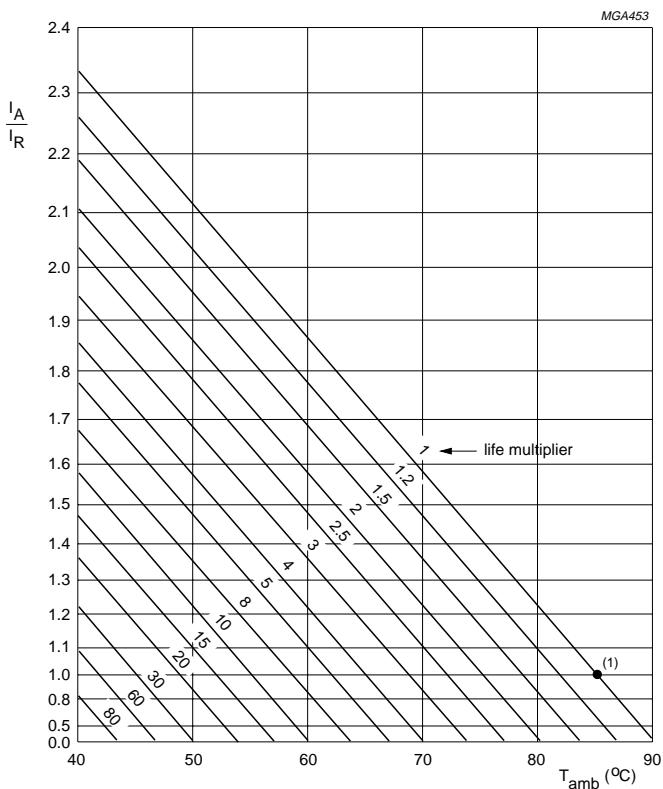

I_A = actual ripple current at 100 Hz and 85 °C.

I_R = rated ripple current at 100 Hz and 85 °C.

(1) Useful life at 85 °C and I_R applied: 12000 hours.

Fig.25 Multiplier of useful life as a function of ambient temperature and ripple current load.

Aluminum electrolytic capacitors

Power Economic Printed Wiring

051/053 PEC-PW

SPECIFIC TESTS AND REQUIREMENTS

General tests and requirements are specified in this handbook, section "Tests and Requirements".

Table 5 Test procedures and requirements

TEST		PROCEDURE (quick reference)	REQUIREMENTS
NAME OF TEST	REFERENCE		
Endurance	IEC 60384-4/ EN130300 subclause 4.13	$T_{amb} = 85 \text{ }^{\circ}\text{C}$; U_R applied; 5000 hours	$U_R \leq 100 \text{ V}$; $\Delta C/C: \pm 15\%$ $U_R > 100 \text{ V}$; $\Delta C/C: \pm 10\%$ $ESR \leq 1.3 \times \text{spec. limit}$ $Z \leq 2 \times \text{spec. limit}$ $I_{L5} \leq \text{spec. limit}$
Useful life	CECC 30301 subclause 1.8.1	$T_{amb} = 85 \text{ }^{\circ}\text{C}$; U_R and I_R applied; 12000 hours	$U_R \leq 100 \text{ V}$; $\Delta C/C: \pm 45\%$ $U_R > 100 \text{ V}$; $\Delta C/C: \pm 30\%$ $ESR \leq 3 \times \text{spec. limit}$ $Z \leq 3 \times \text{spec. limit}$ $I_{L5} \leq \text{spec. limit}$ no short or open circuit, no visible damage total failure percentage: $U_R \leq 100 \text{ V}: \leq 1\%$ $U_R > 100 \text{ V}: \leq 3\%$
Shelf life (storage at high temperature)	IEC 60384-4/ EN130300 subclause 4.17	$T_{amb} = 85 \text{ }^{\circ}\text{C}$; no voltage applied; 500 hours after test: U_R to be applied for 30 minutes, 24 to 48 hours before measurement	$\Delta C/C: \pm 10\%$ $ESR \leq 1.2 \times \text{spec. limit}$ $I_{L5} \leq 2 \times \text{spec. limit}$